


PA Amplifier

NT - 30APA

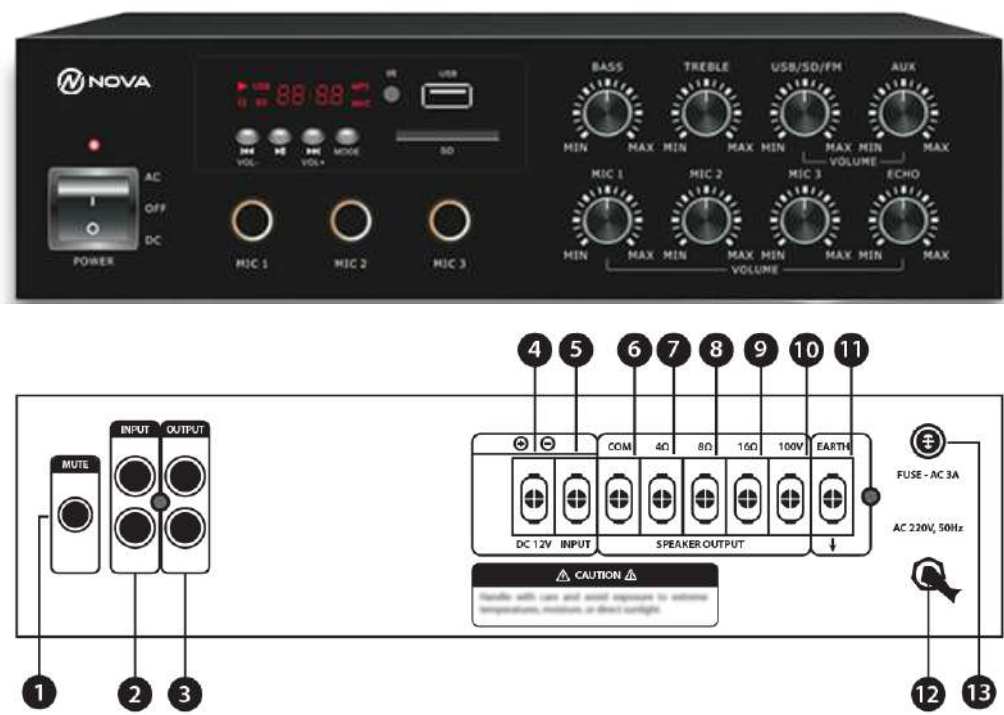

PA Amplifier (NT-30APA)

The NT-30APA is a powerful and versatile audio amplifier designed for public address and sound systems. It supports USB, SD card, FM radio, and Bluetooth for seamless playback. With multiple inputs (AUX, 3 mic inputs) and AUX output, it ensures flexible connectivity. The amplifier provides 100V/70V constant voltage output and supports 4-16 ohm resistance for various speaker setups. Safety features include short-circuit protection, overheating, and distortion alarms. It operates on both AC (220V) and DC (12V), making it suitable for different environments. Perfect for conferences, events, and PA systems.

TECHNICAL DATA SPECIFICATION

Model	NT-30APA
Line Voltage:	70-100 v
Impedance:	4-16 Ω
Rated Power:	30 W
Zone:	/
Dimension:	253x220x68
Weight:	3.9 KG
Gross Weight:	4.2 KG
Panel Color:	Black

KEY FEATURES

The NT-30APA audio amplifier supports USB, SD card, FM radio, and Bluetooth for diverse playback options. It includes AUX input, three microphone inputs, and an AUX output for easy connectivity. With 100V/70V constant voltage output and 4-16 ohm resistance support, it ensures excellent sound quality. Safety features like short-circuit protection, overheating, and distortion alarms enhance reliability.

QUICK GUIDE

To set up the NT-30APA audio amplifier, connect the power using AC (220V) or DC (12V). Use USB, SD card, AUX input, Bluetooth, or FM radio for audio playback. Connect up to three microphones and an AUX output for added functionality. Adjust bass, treble, volume, and echo using the control knobs. Ensure proper speaker connections with 100V/70V constant voltage or 4-16 ohm resistance output.

