
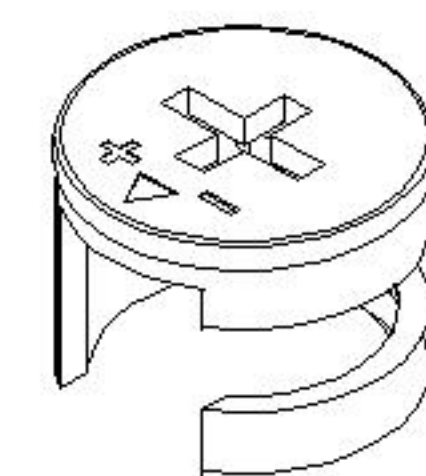
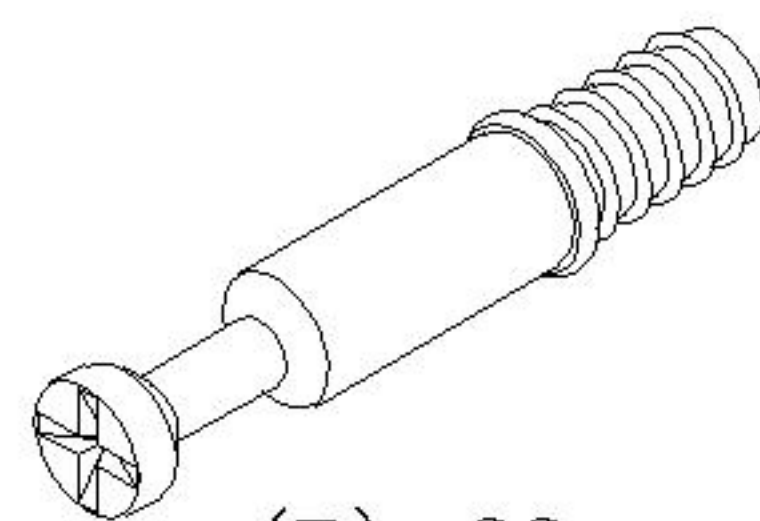
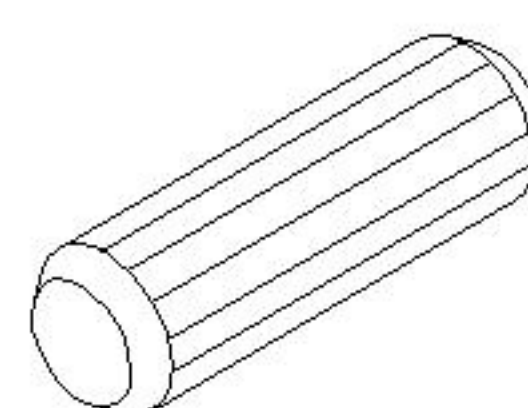
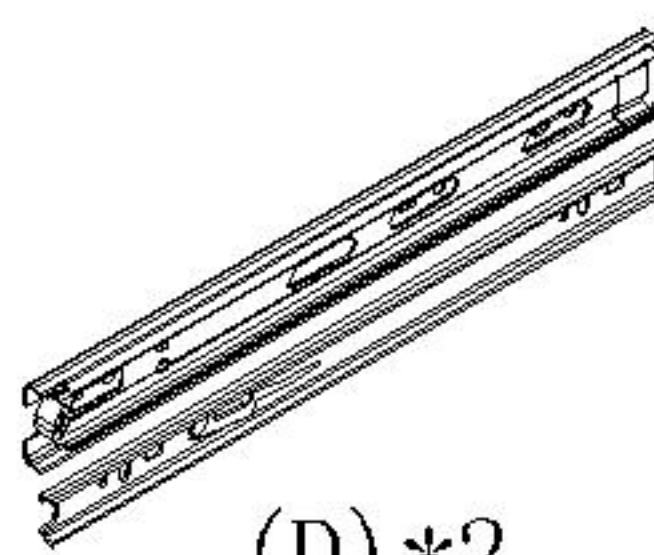
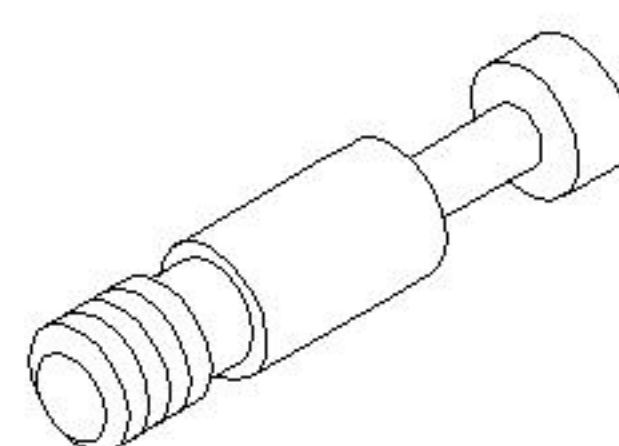

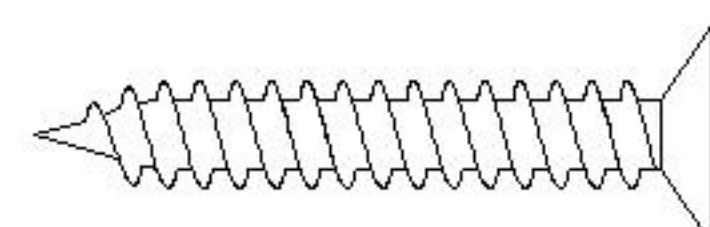
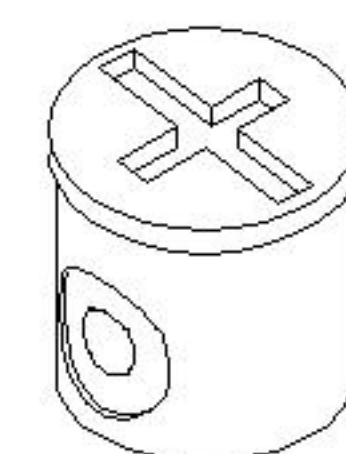
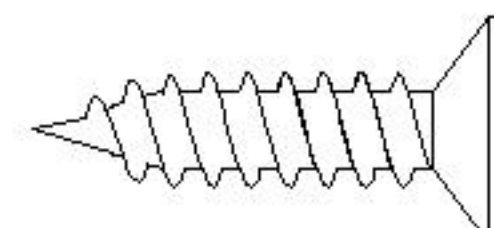
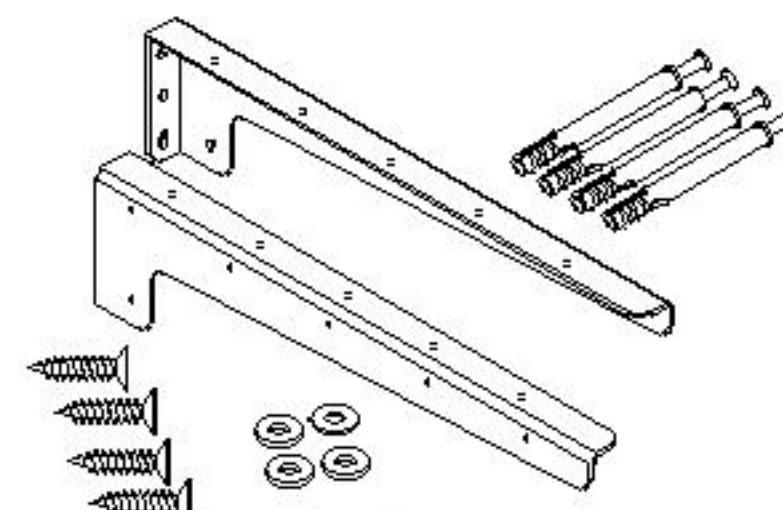
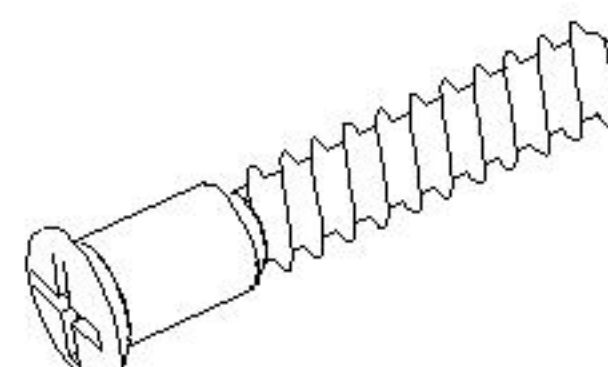


LINSY 林氏家居		五金表/Hardware list				部件表/Parts List				
安装示意图/Assembly Instruction		 (A)*22 大三合一锁饼 3-in-1 large lock  (B)*22 二合一螺杆 2-in-1-screw  (C)*8 木榫-(Ø8*30mm) Wood tenon  (D)*2 导轨10寸 Three-section rail  (E)*8 小二合一杆 2-in-1 small rod  (F)*8 小三合一锁饼 3-in-1 small lock  (G)*8 自攻螺丝 (M4*40mm) Tapping screw  (H)*8 塑料螺母 Plastic Nut  (I)*25 自攻螺丝M3.5*12 Tapping screw  (G)*1 重型吊码 Heavy Hanging Code  (K)*3 过山丝 Confirmat screw				编号NO.	名称Name	规格 (MM) Specification	数量QTY	材质Material
1	面板Top panel					1195*500*15	1	三胺板 Melamine		
2	右侧板Side board (R)					124*489*15	1	三胺板 Melamine		
3	左侧板Side board (L)					124*489*15	1	三胺板 Melamine		
4	中侧板Middle side board	108*472*15	1	三胺板 Melamine						
5	背板Back board	1163*124*15	1	三胺板 Melamine						
6	拉条Brace	1163*58*15	1	三胺板 Melamine						
7	左抽屉面板Drawer's panel (L)	596*134*15	1	三胺板 Melamine						
8	右抽屉面板Drawer's panel (R)	596*134*15	1	三胺板 Melamine						
9	抽屉左侧板Drawer's side board (L)	295*78*12	2	三胺板 Melamine						
10	抽屉右侧板Drawer's side board (R)	295*78*12	2	三胺板 Melamine						
11	抽屉后板Drawer's Back board	524*78*12	2	三胺板 Melamine						
12	抽屉底板Drawer's Bottom board	534*291*5	2	三胺板 Melamine						


TV1V-A

安装方法/
Installation method

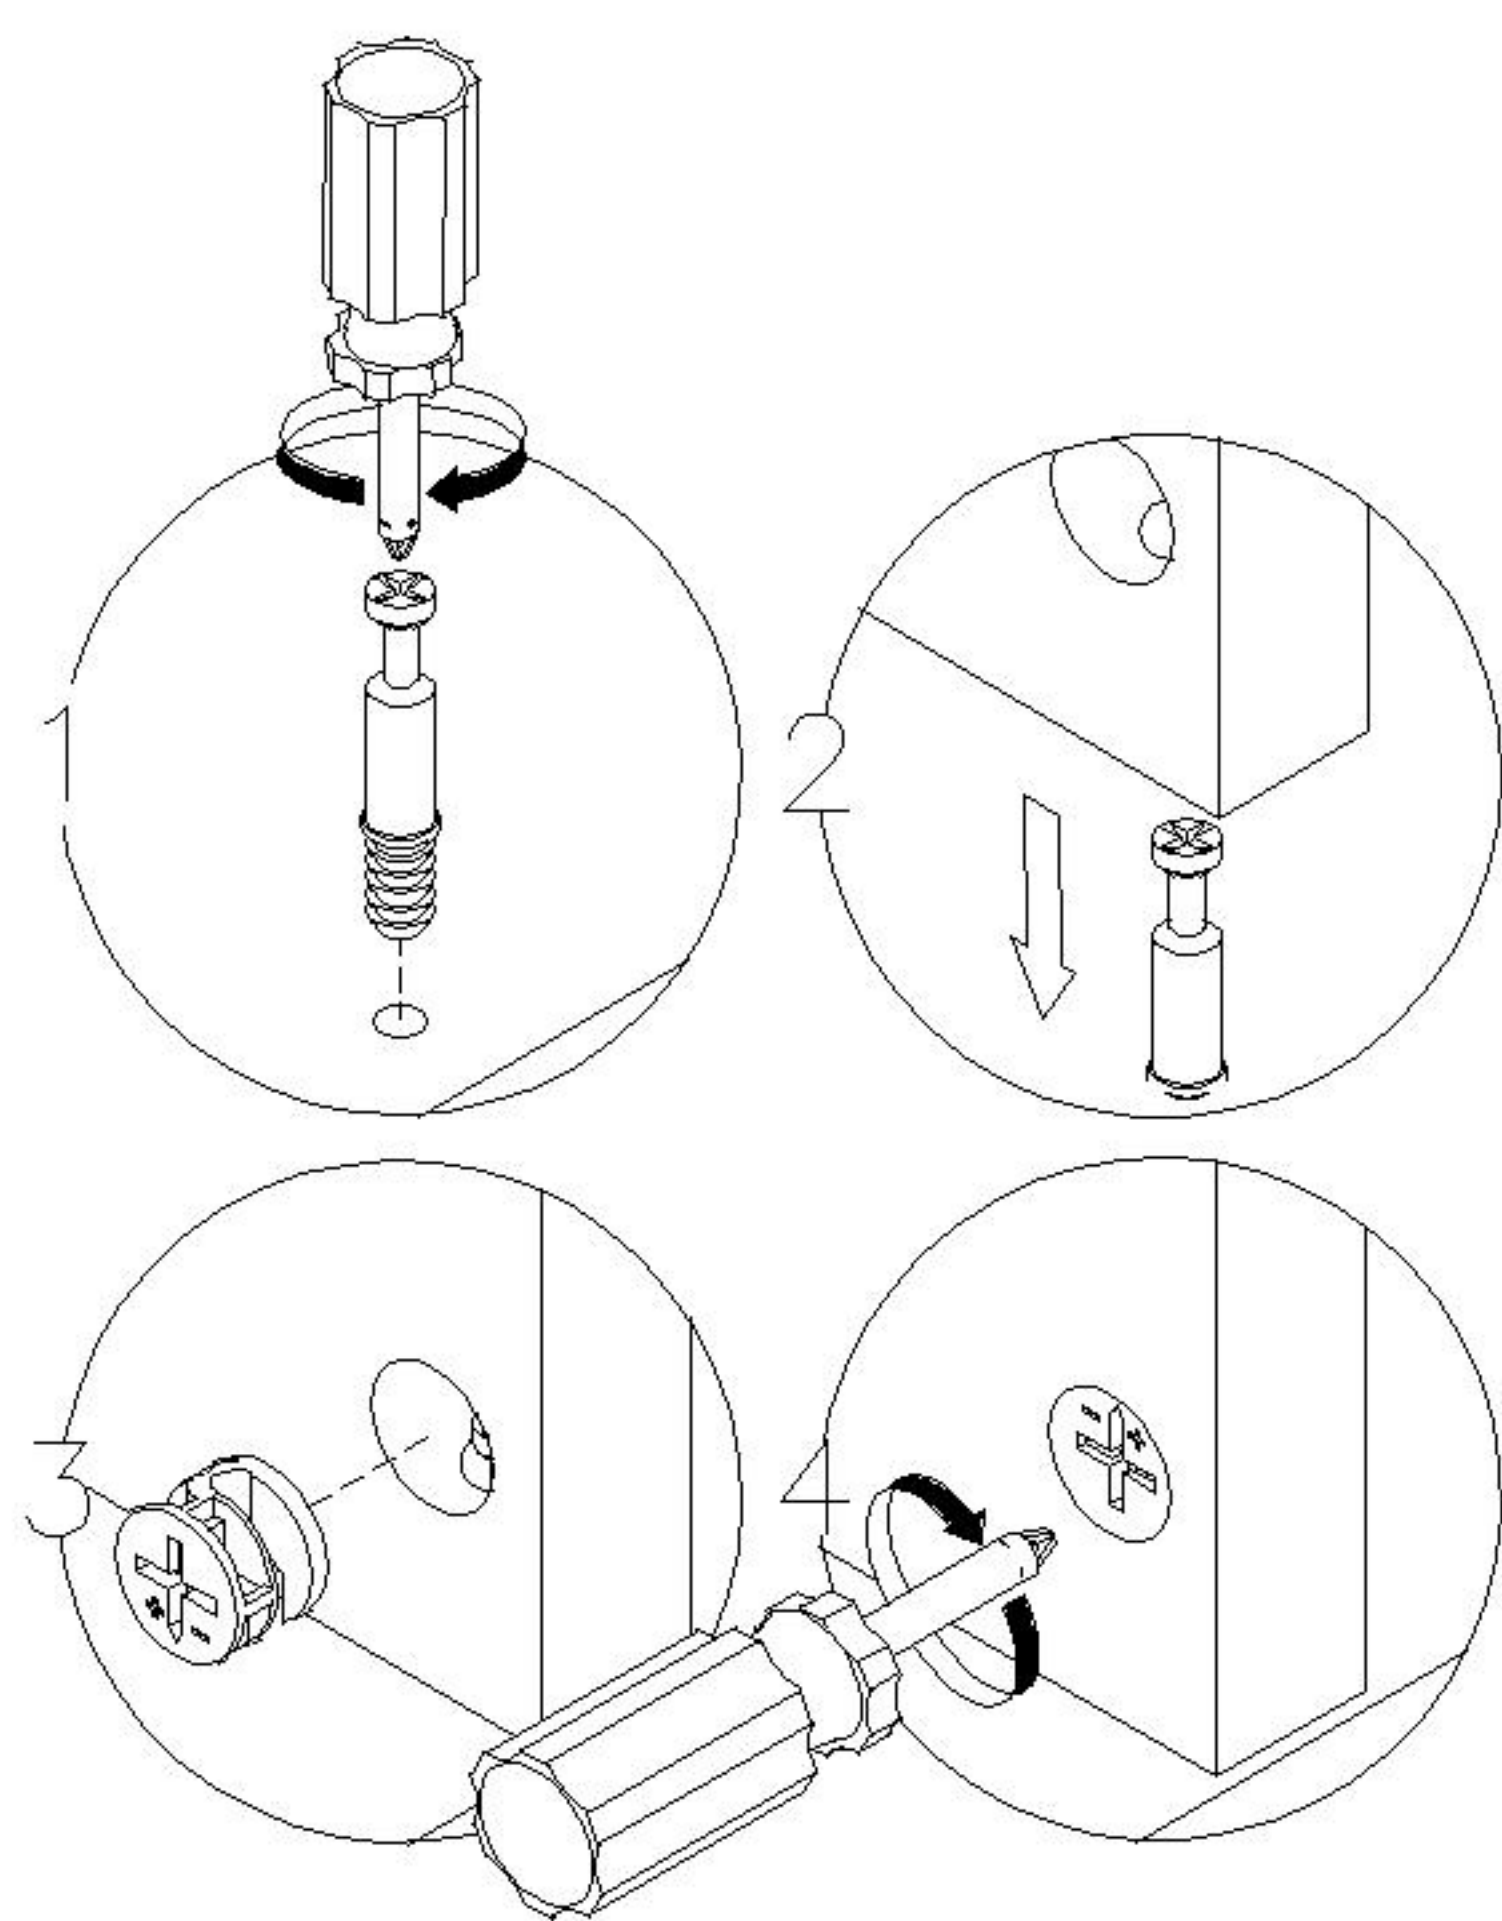

二合一 two-in-one


- (E)*8
- (F)*8
- (G)*8
- (H)*8

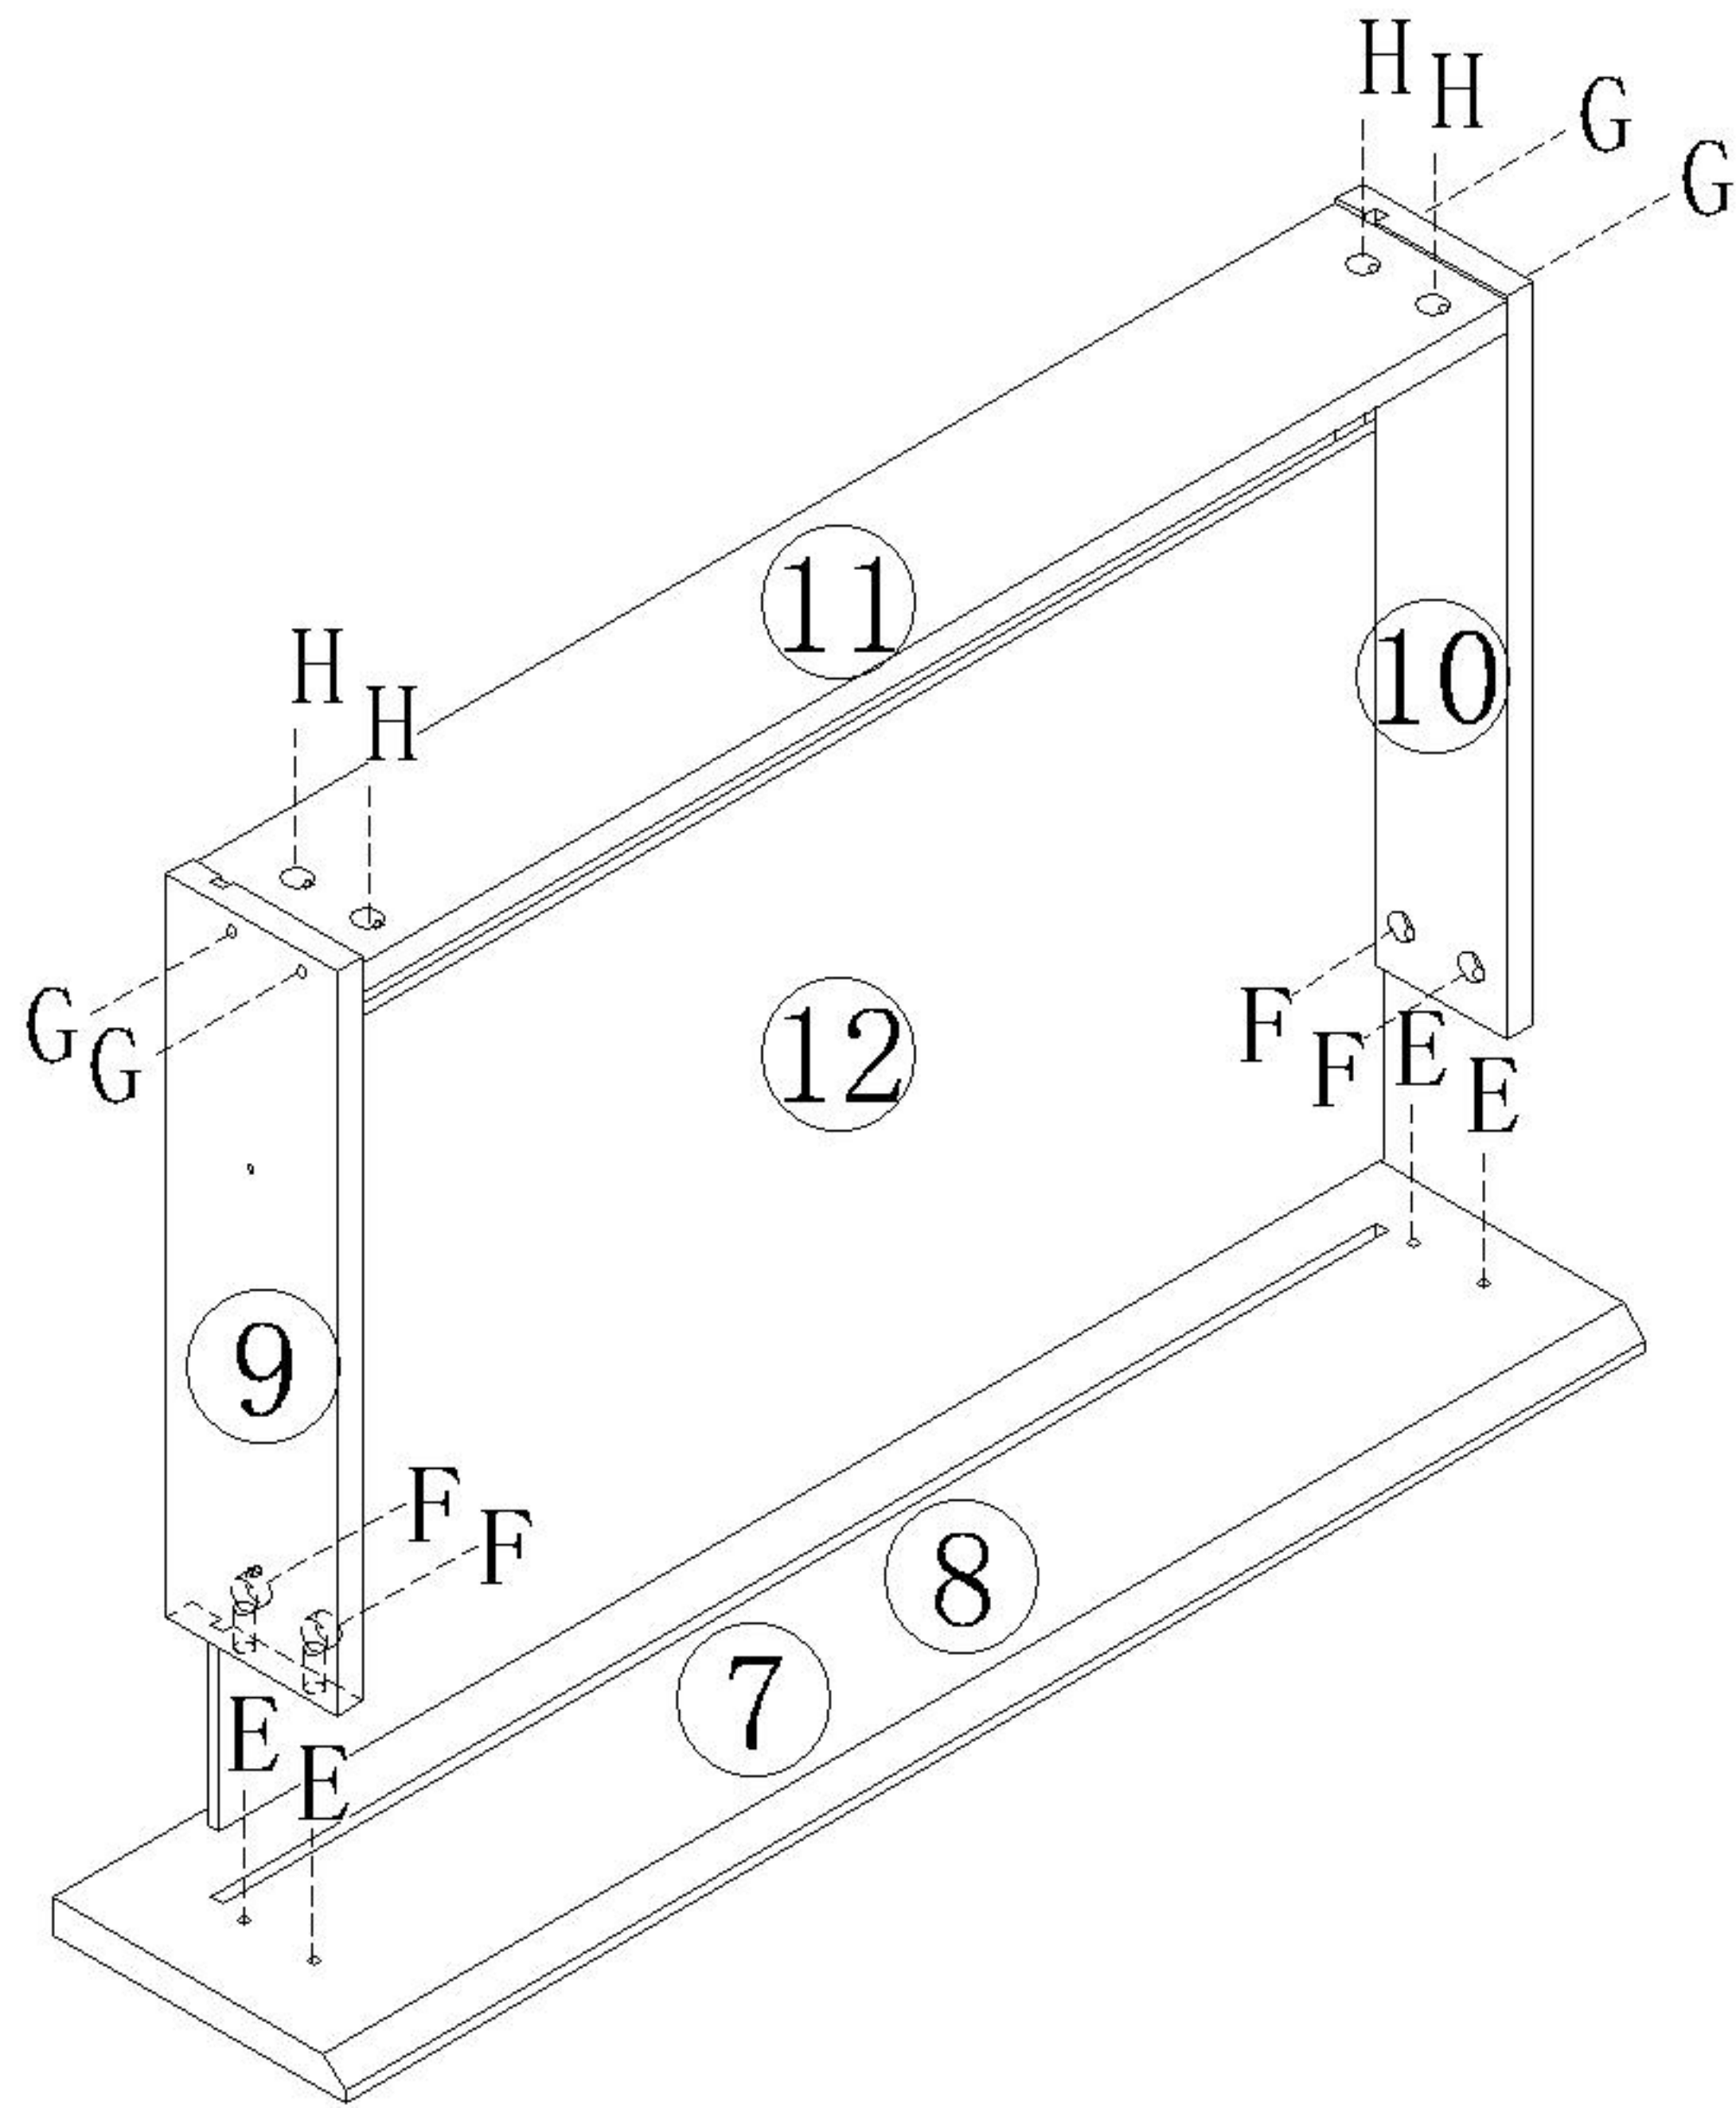

X2

3


- (I)*12
- (D)*2

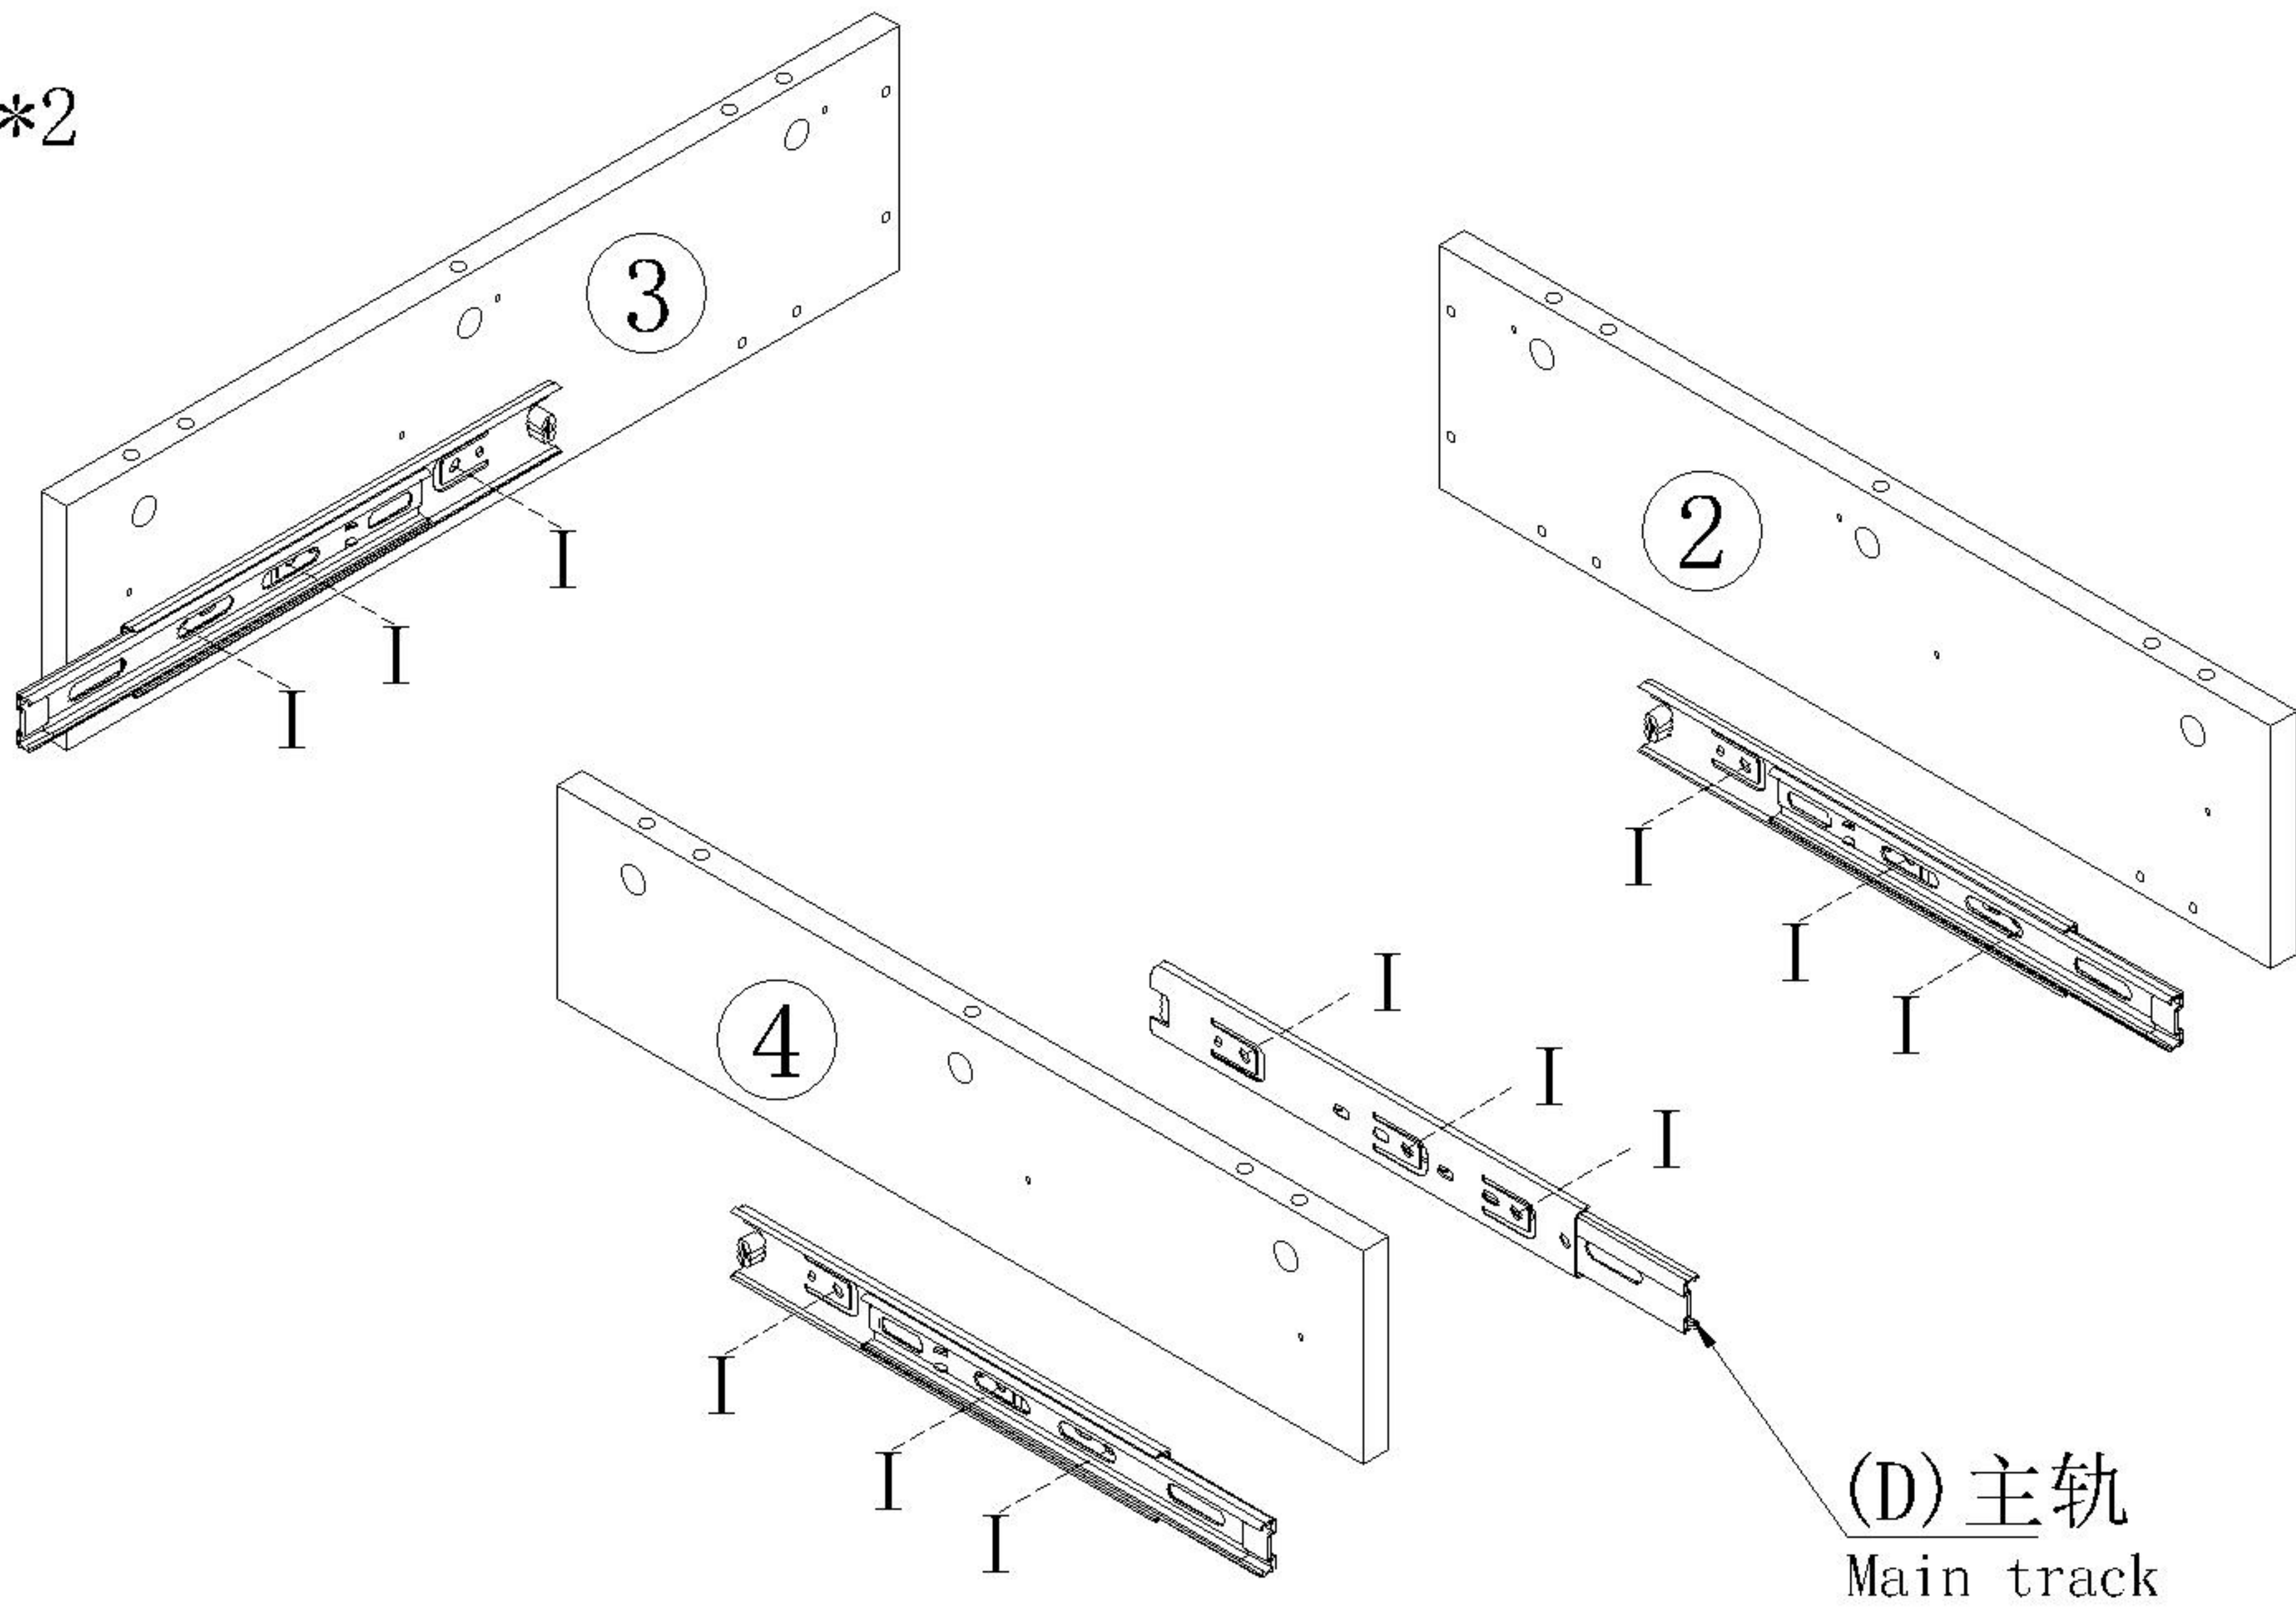

(D) 主轨
Main track

3


- (A)*8
- (B)*8
- (K)*2

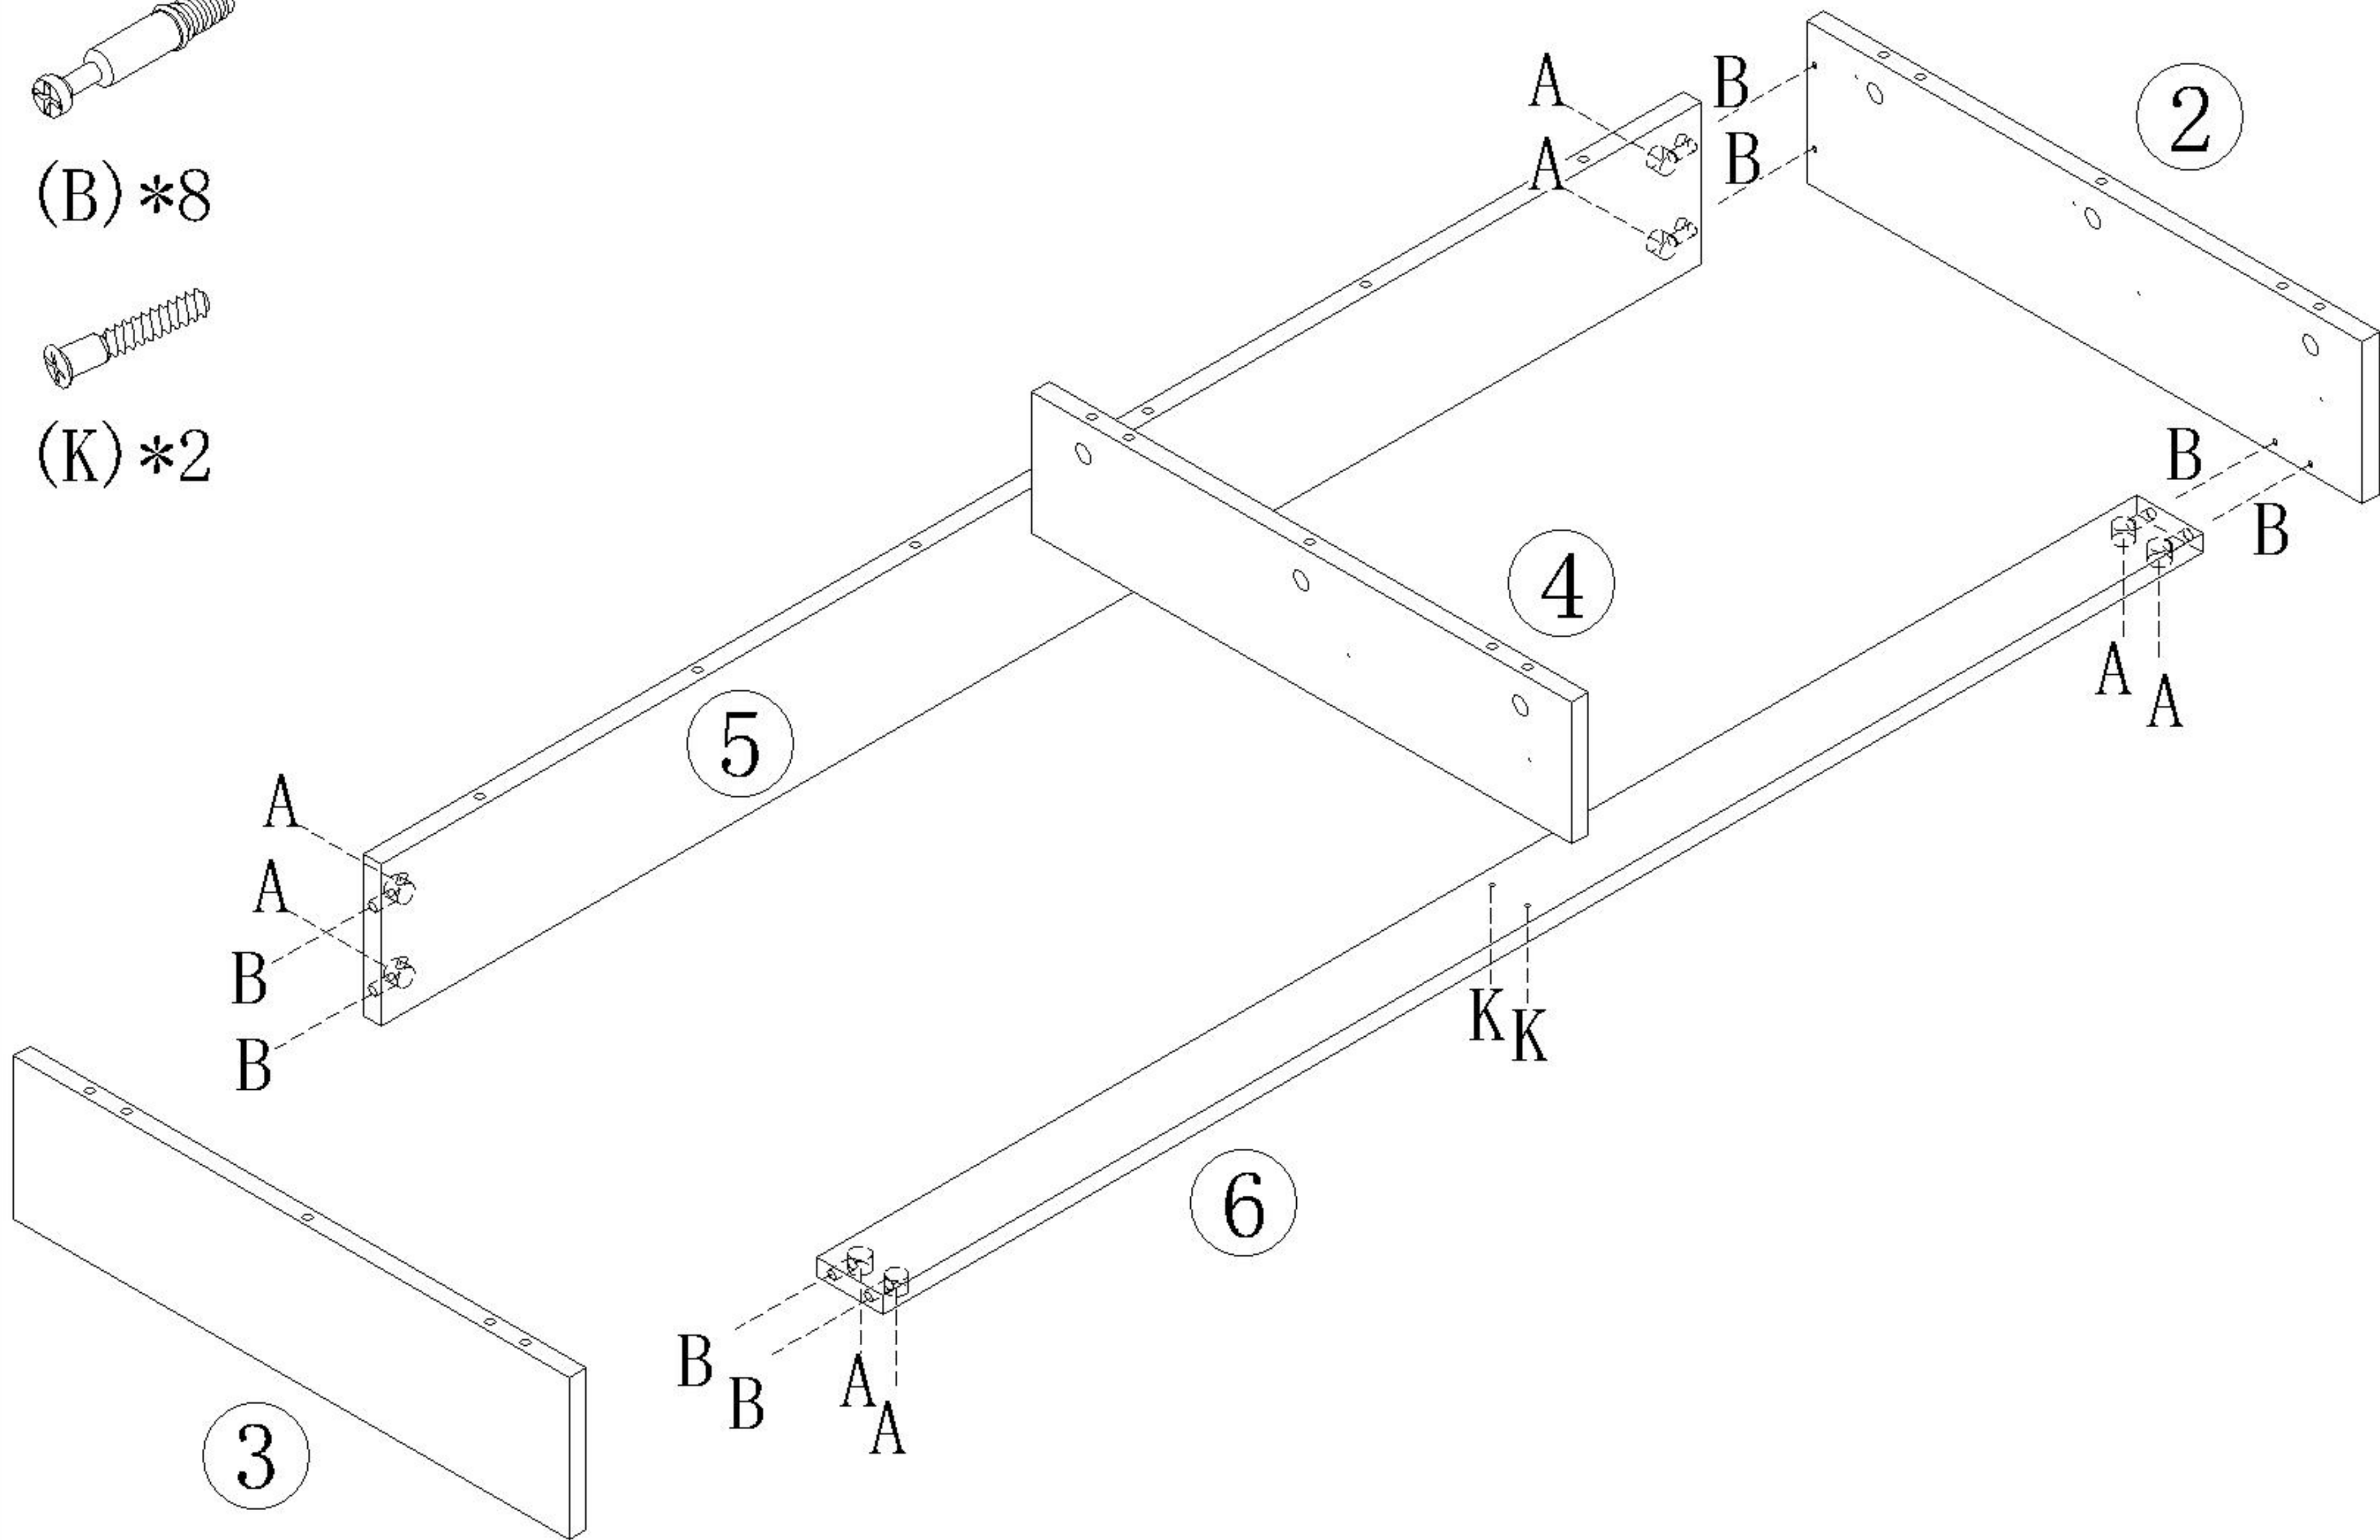

4


TV1V-A

安装方法/
Installation method

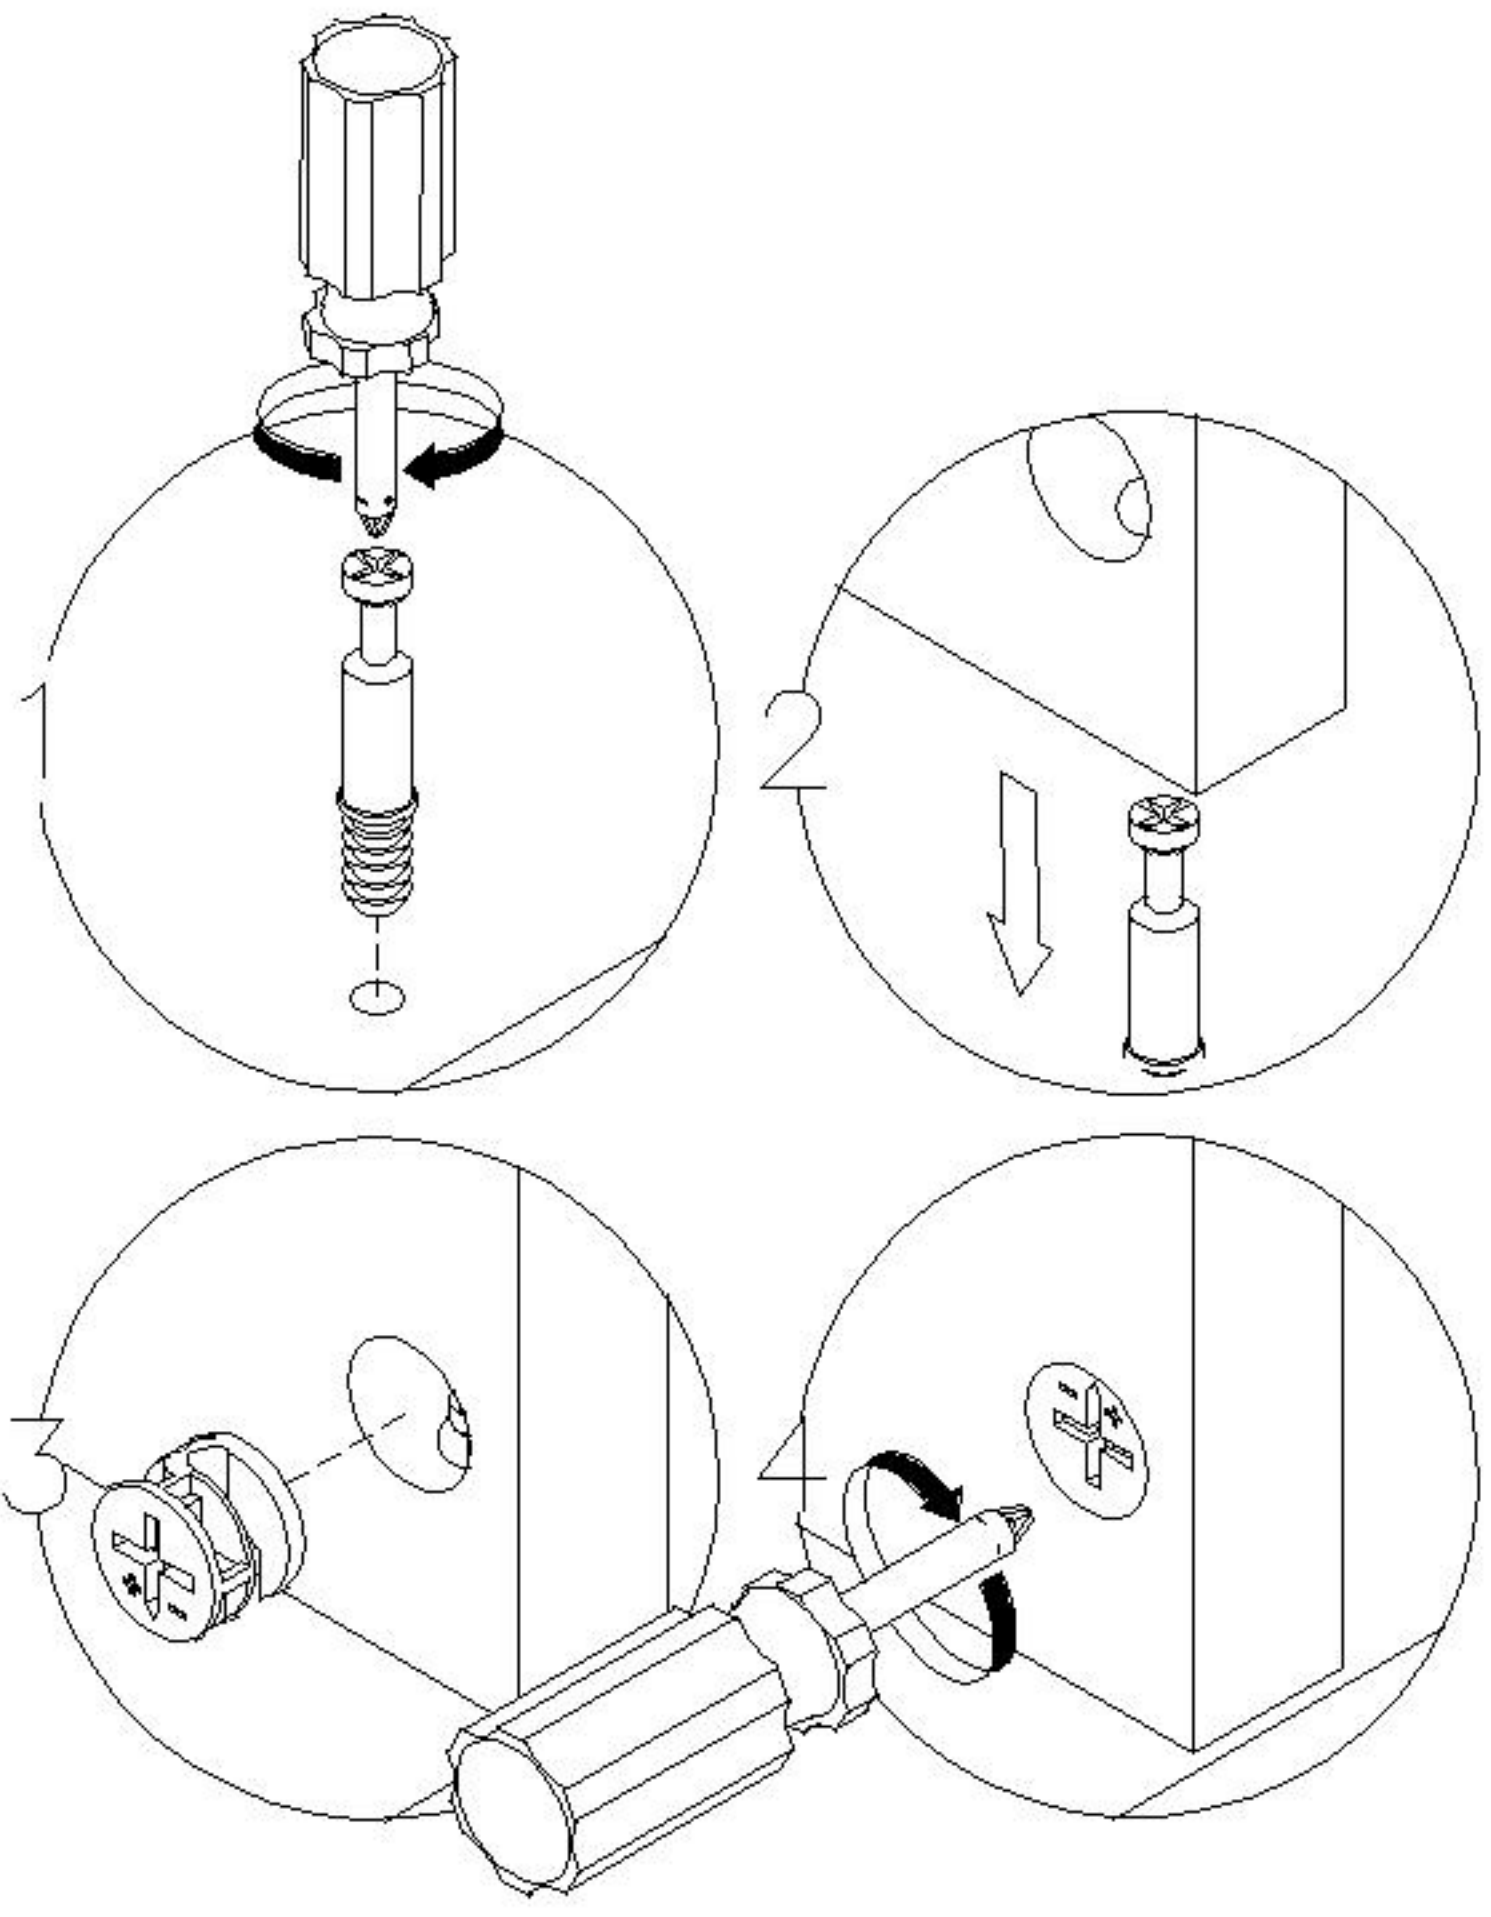


二合一 two-in-one



- (A)*13
- (B)*13
- (C)*8
- (K)*1

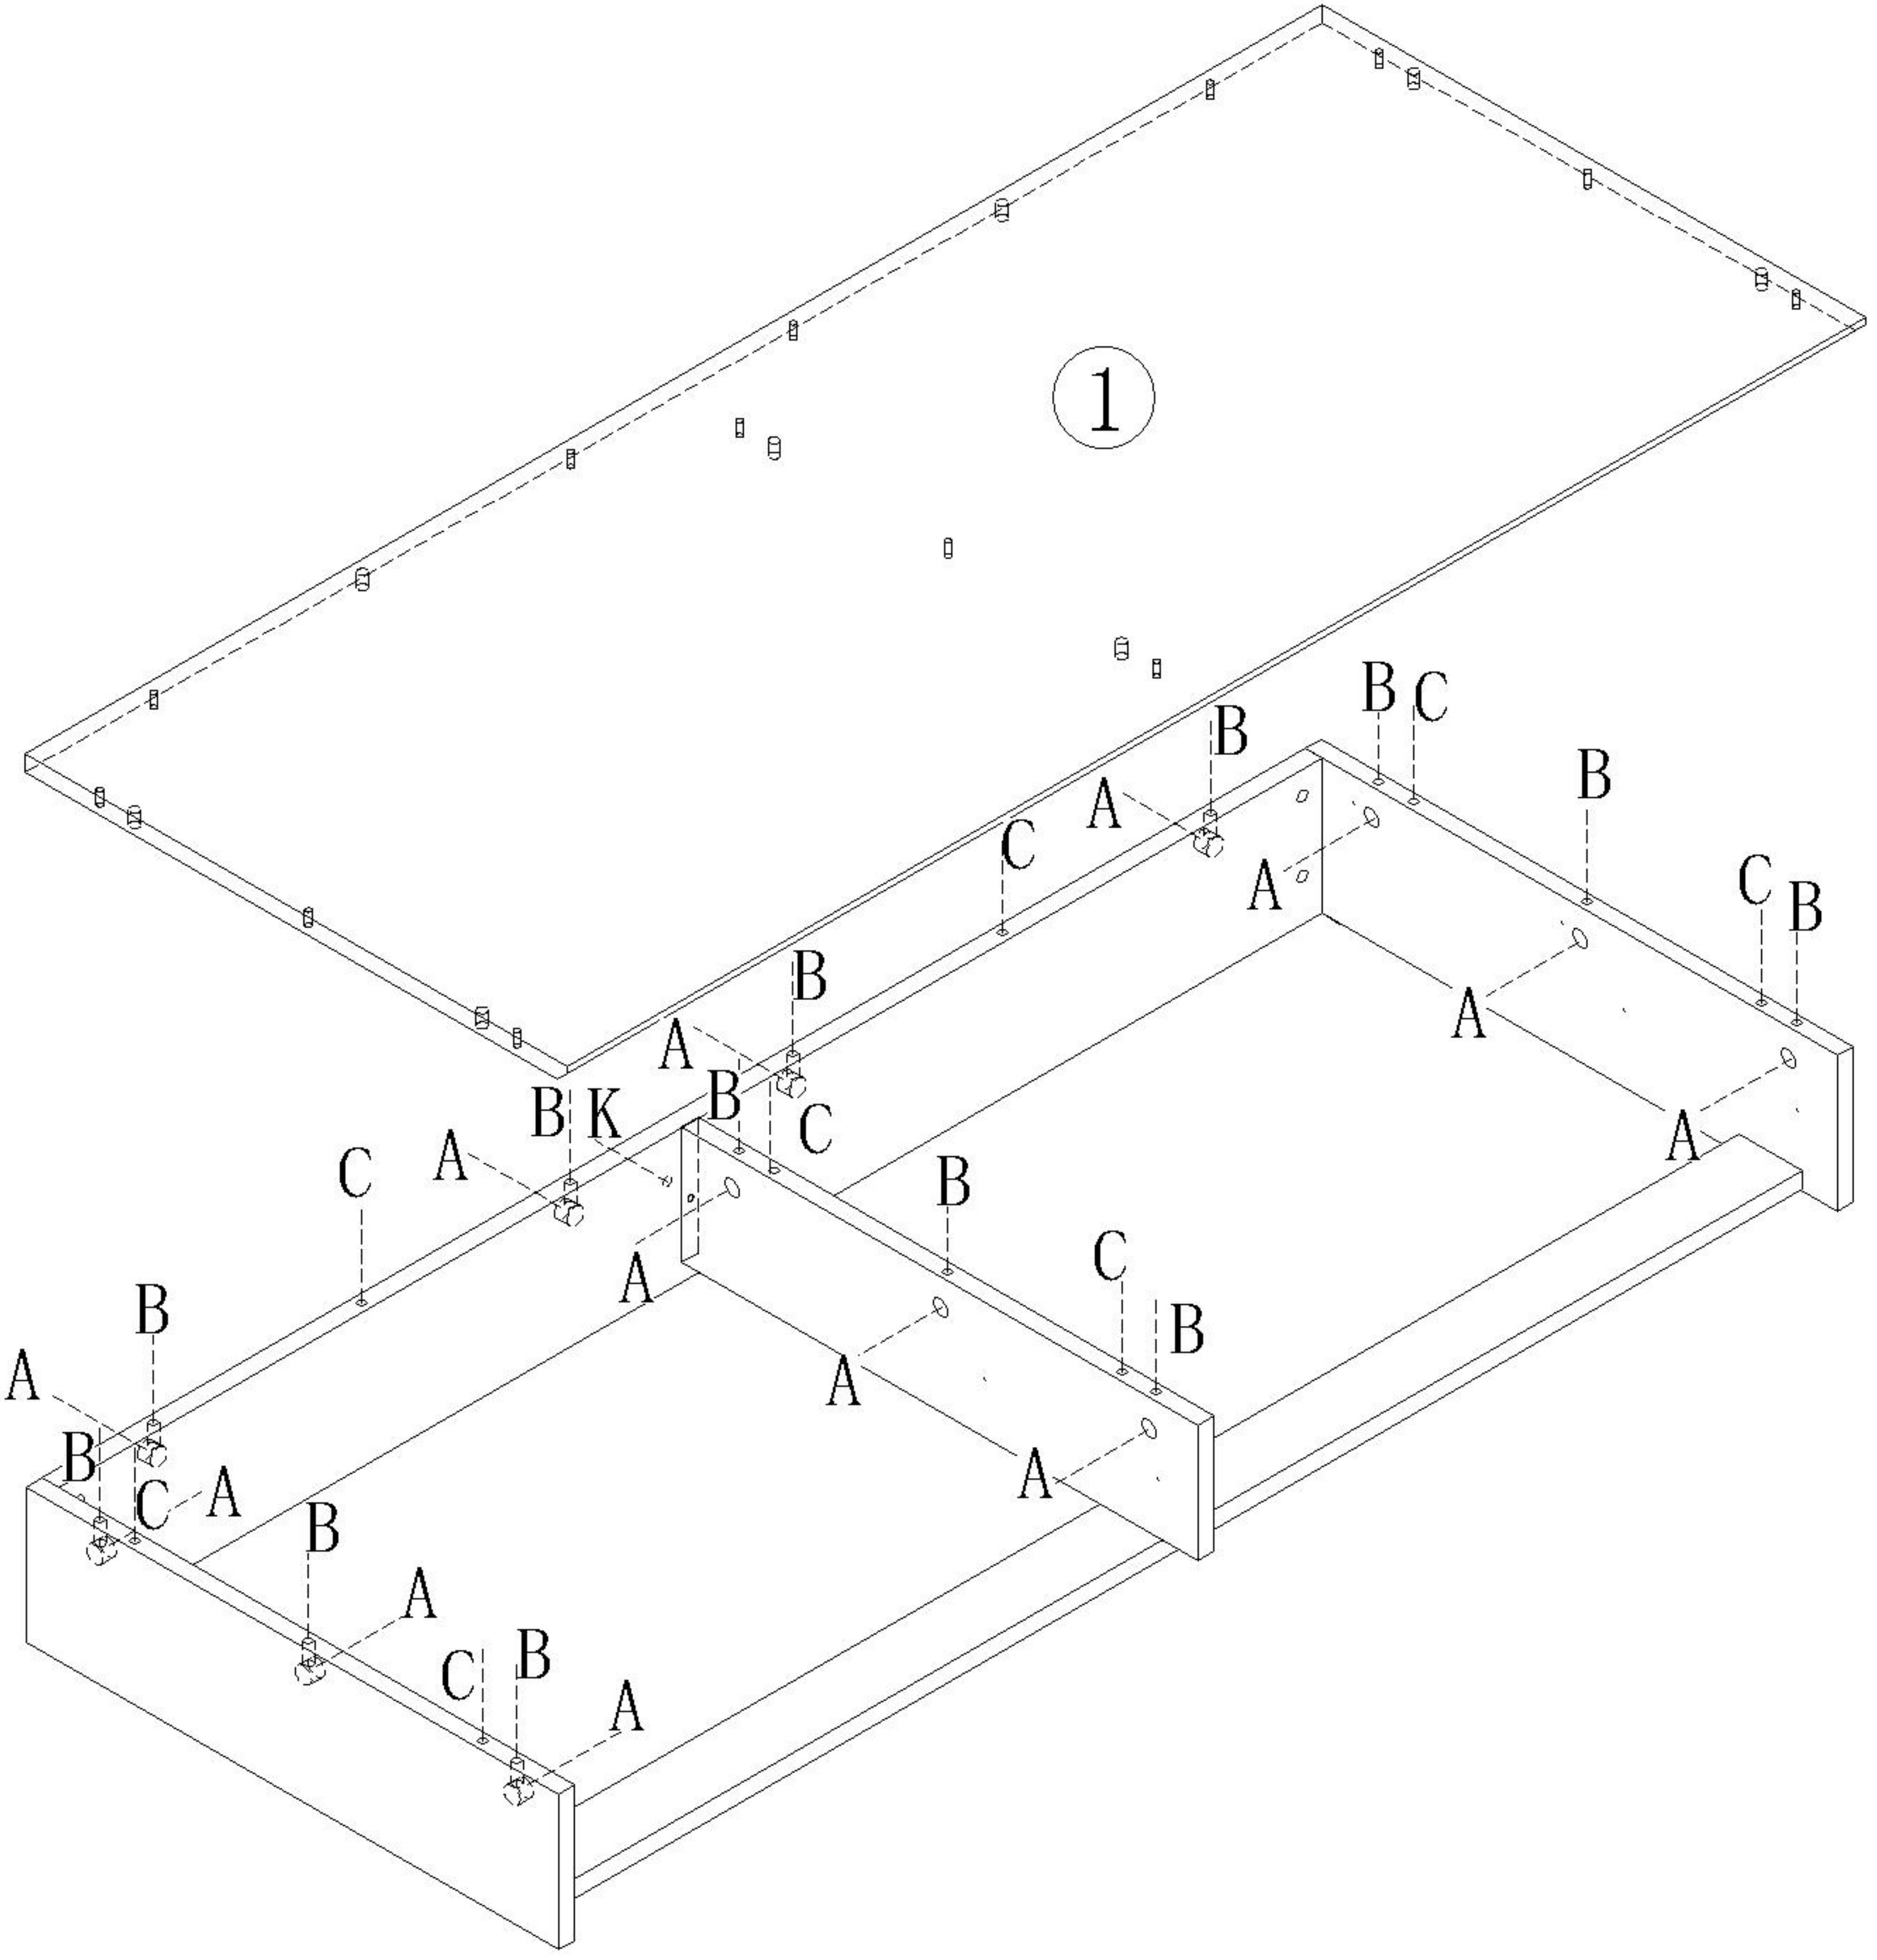

- (O)*1
- (P)*1
- (L)*18

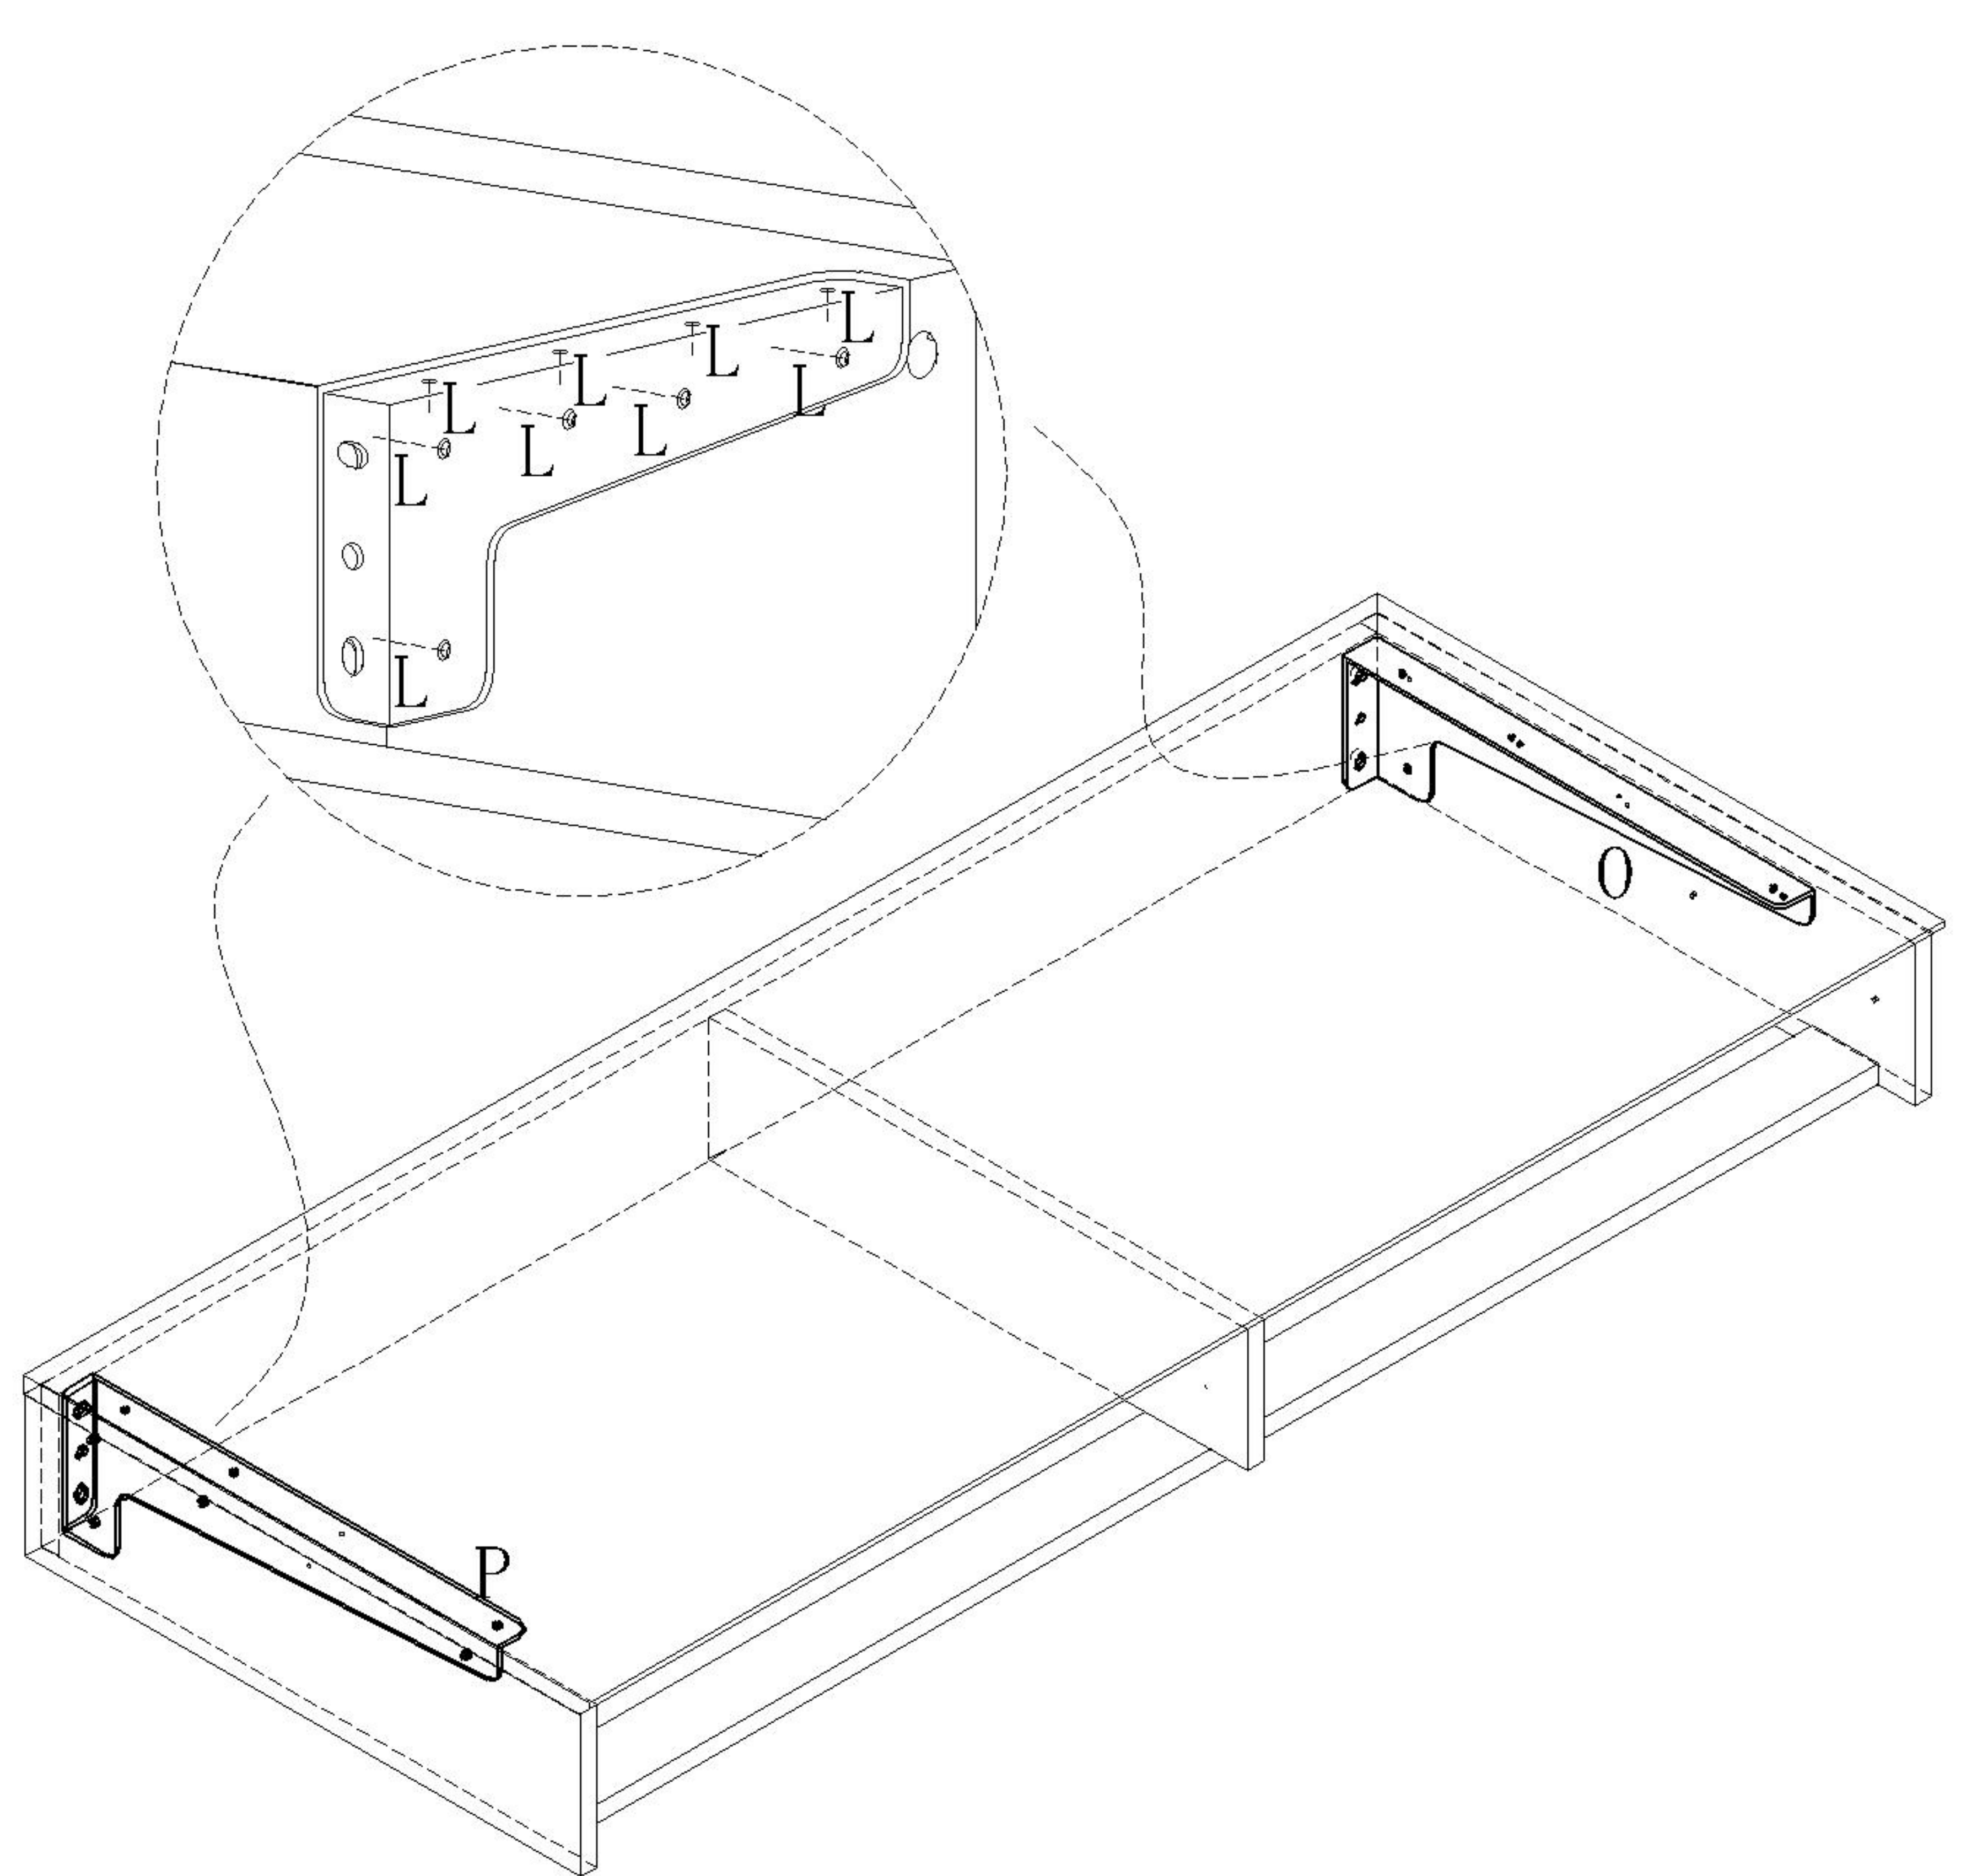

- (Q)*4
- (M)*4
- (N)*4

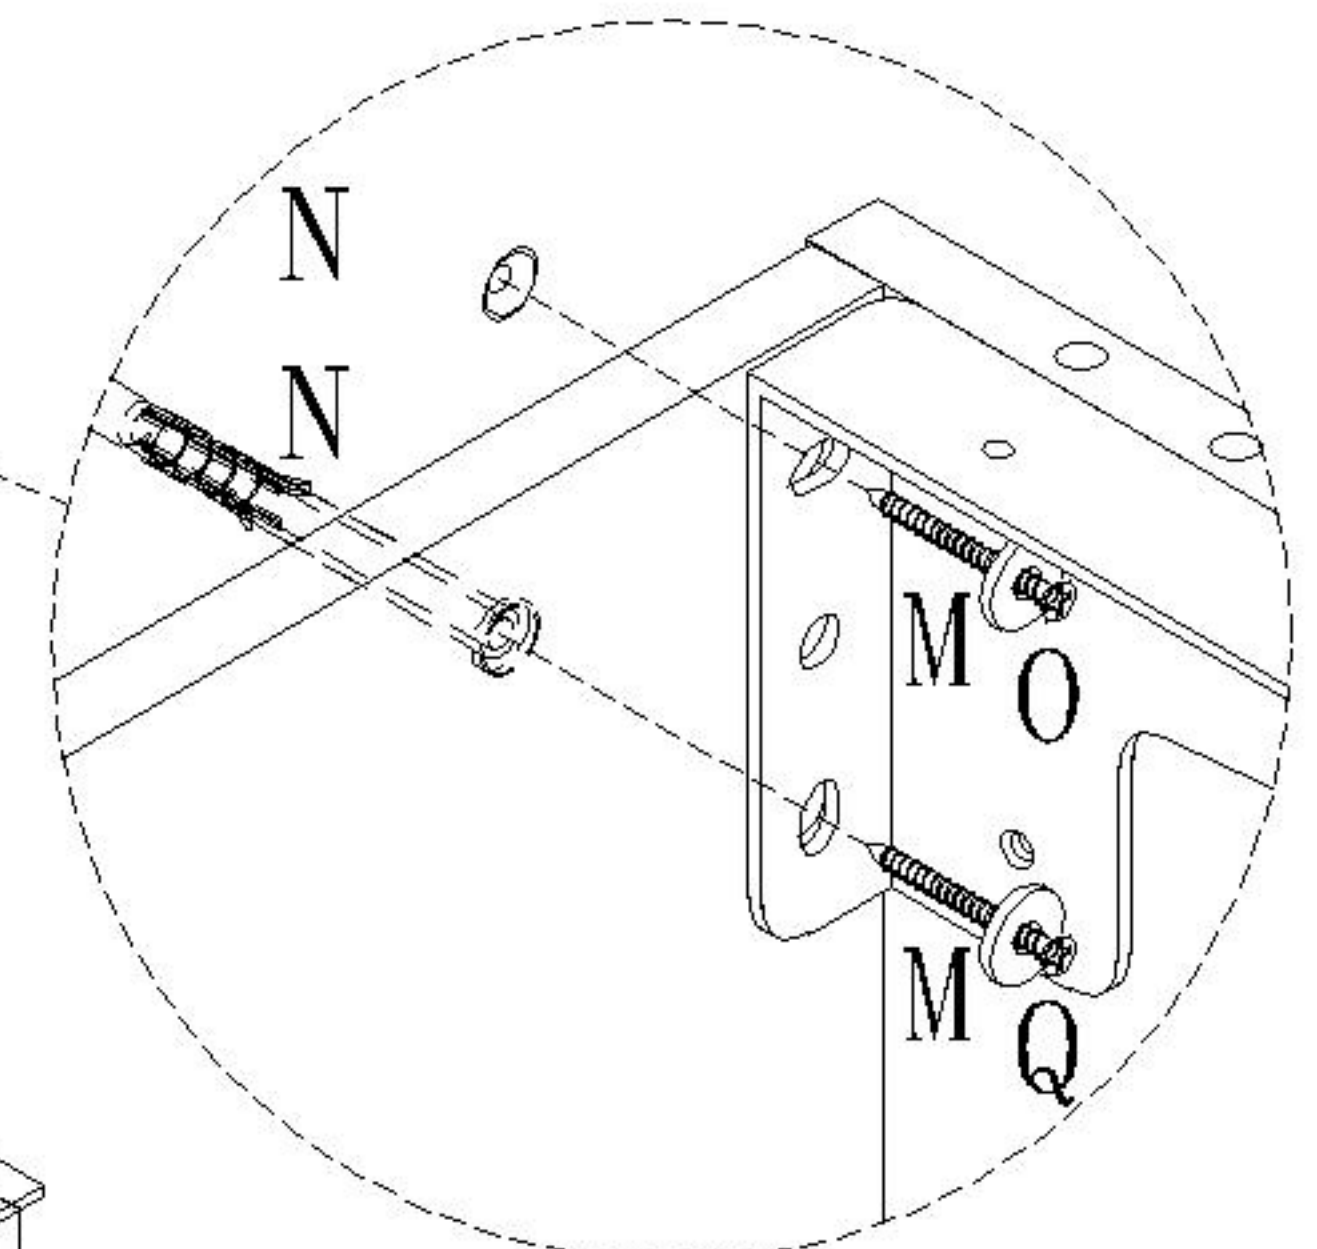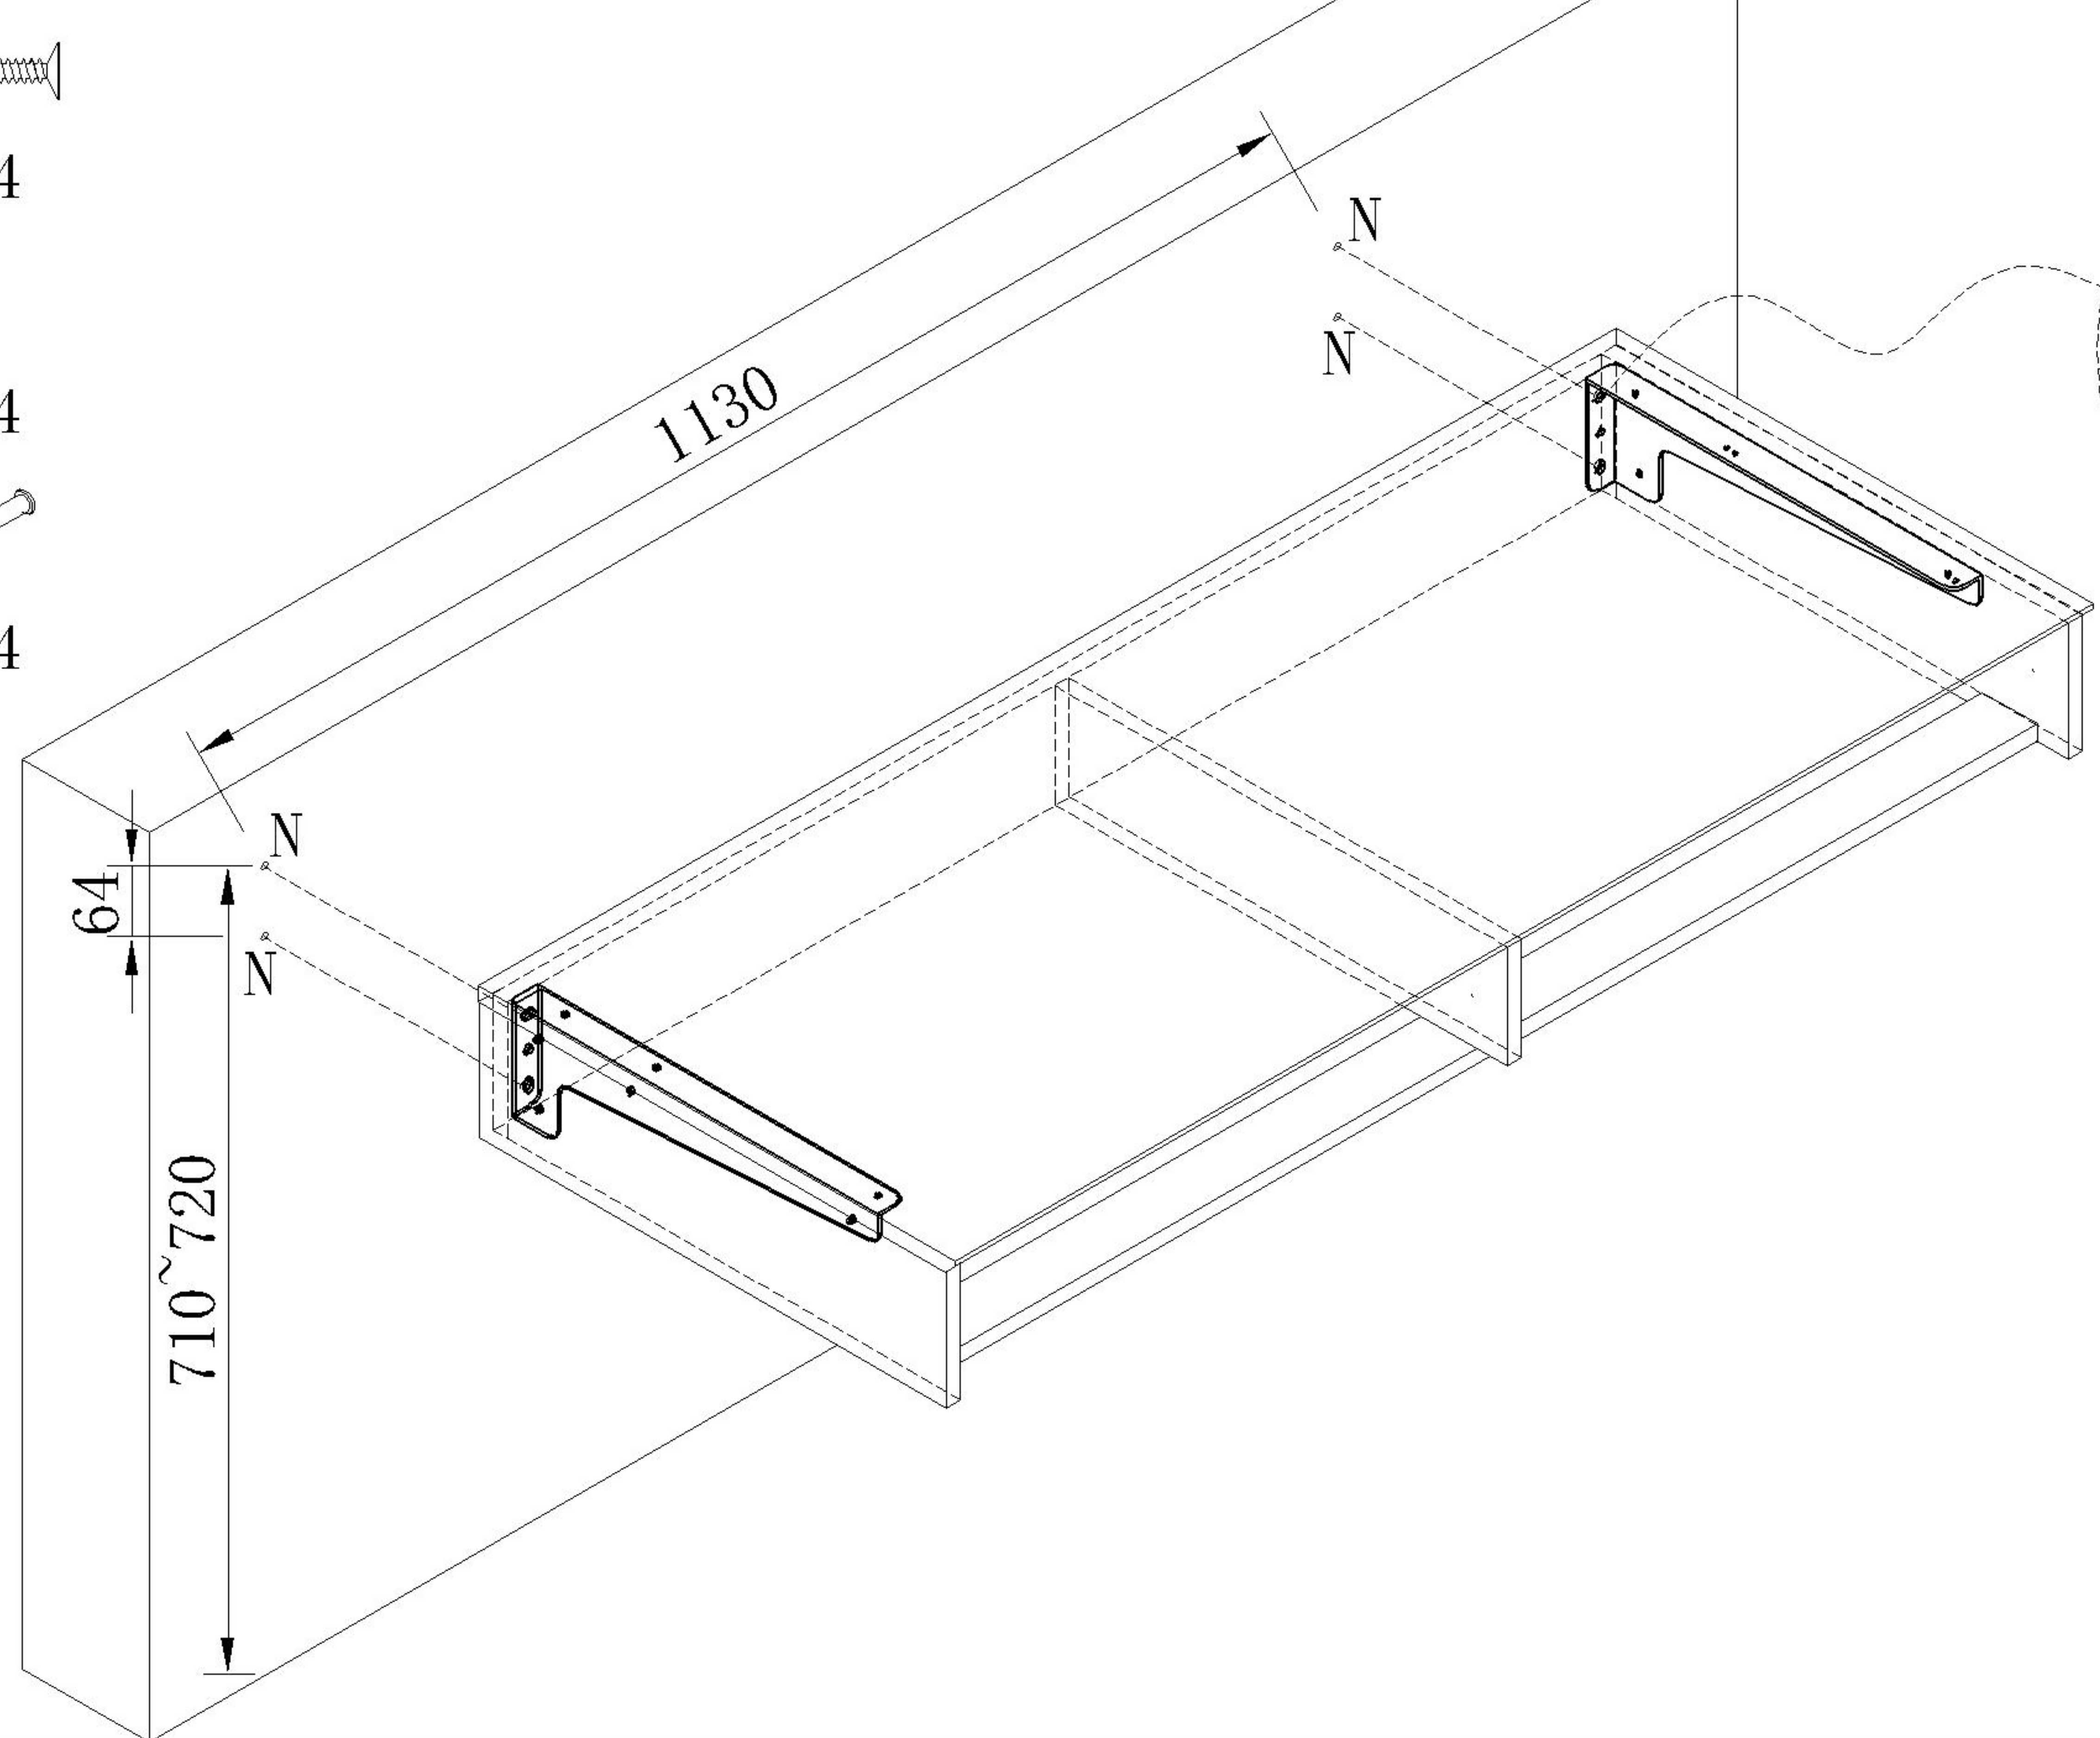


注意：实心墙厚度应不少于120mm，以防打穿
Note: The thickness of the solid wall should not be less than 120mm to prevent penetration




用冲击钻在墙体同一水平位置打 $\phi 8 \times 85$ mm孔，将柜体安装在墙体的合适位置，图为孔之间的距离
Punch $\phi 8 \times 85$ mm holes at the same horizontal position of the wall with the impact drill, and install the cabinet at the appropriate position of the wall. The figure shows the distance between the holes

安装方法/
Installation method

1
阀门开关(下压为开)
Valve switch
(press down to open)

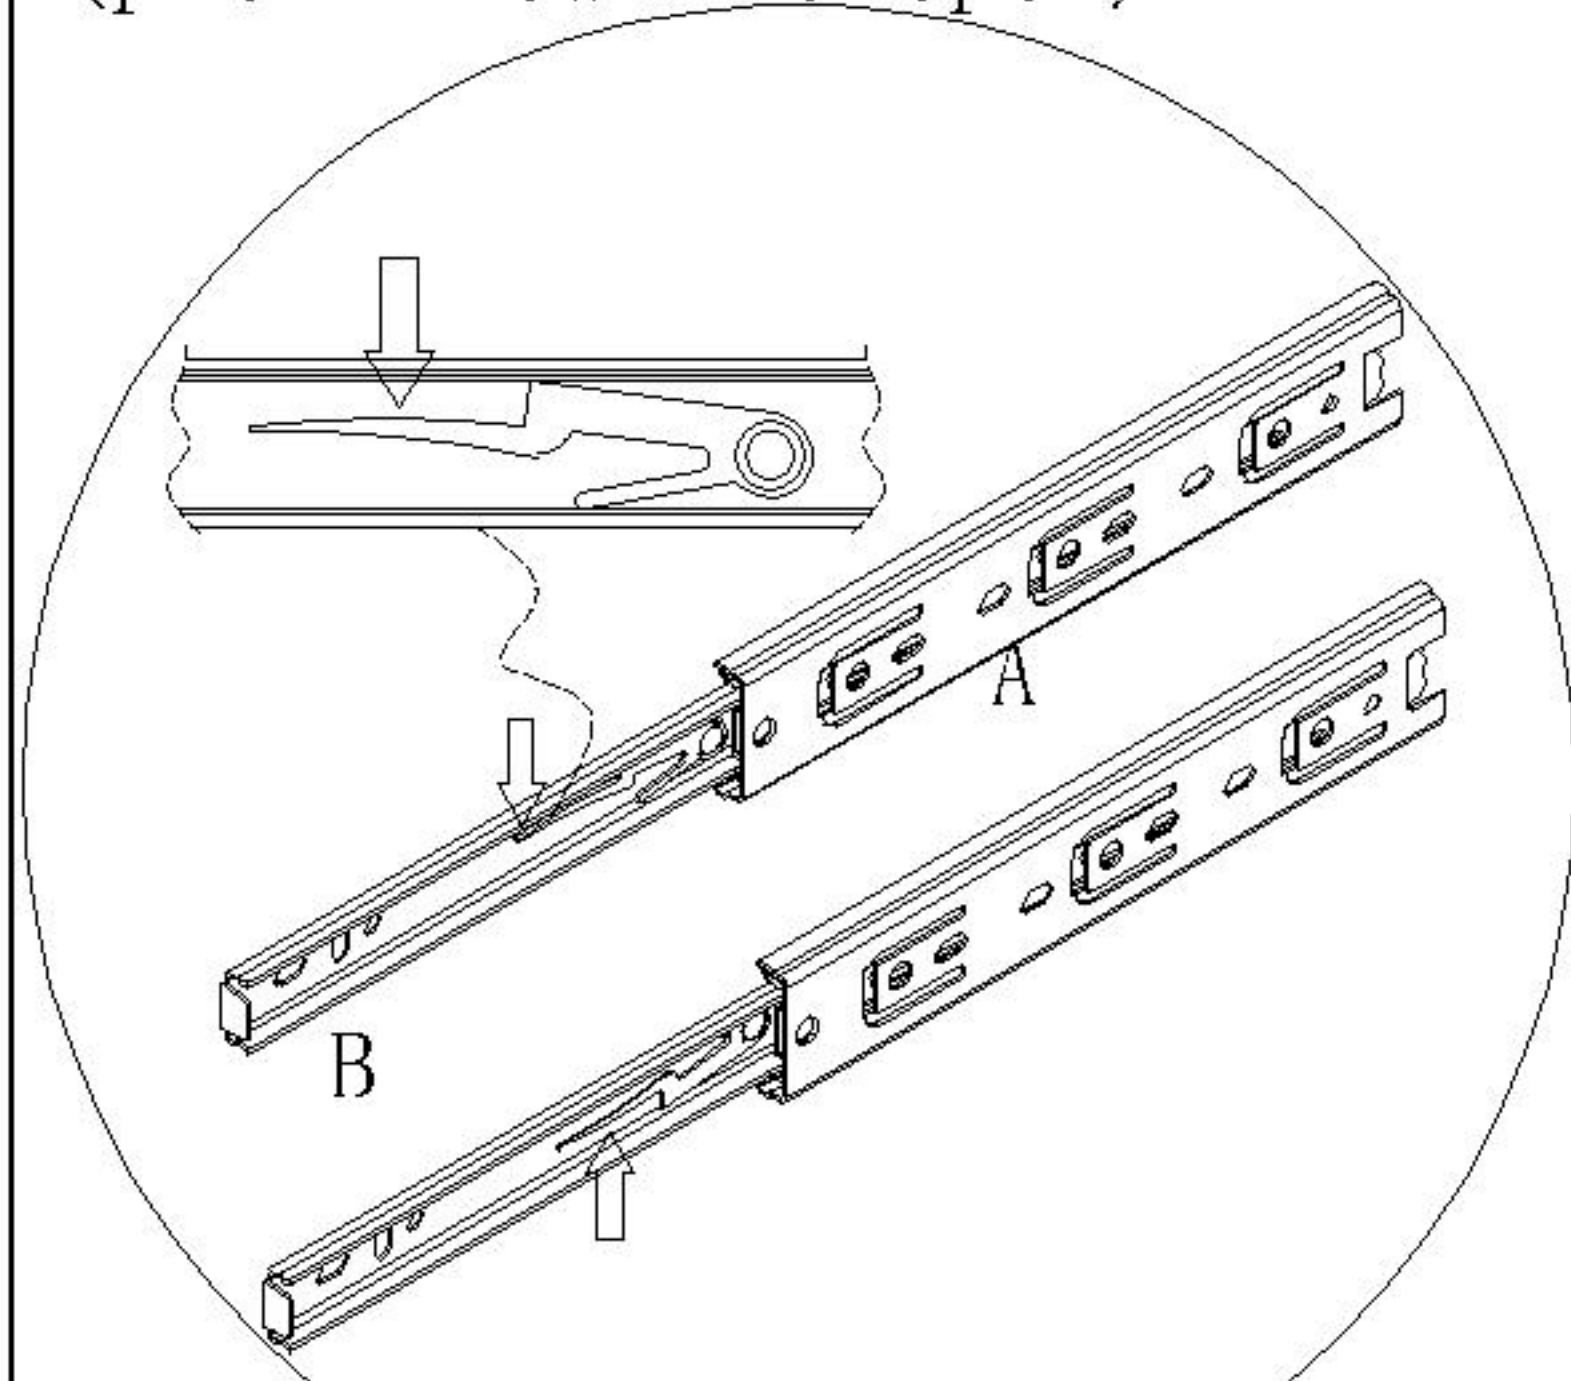

注: 先将A与B拆下来
Note: remove a and B first

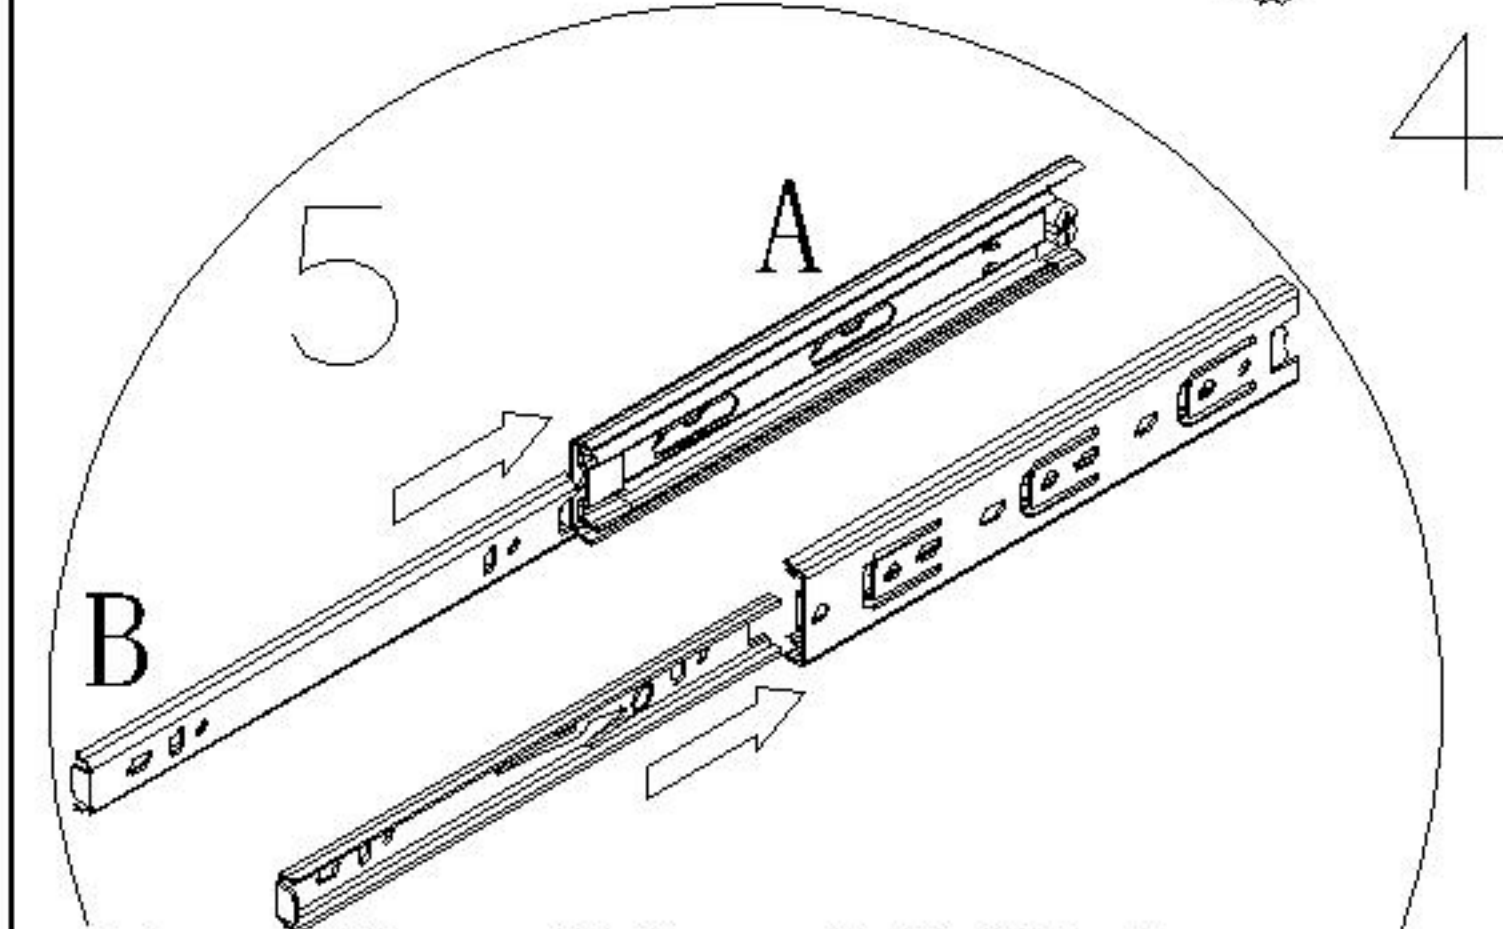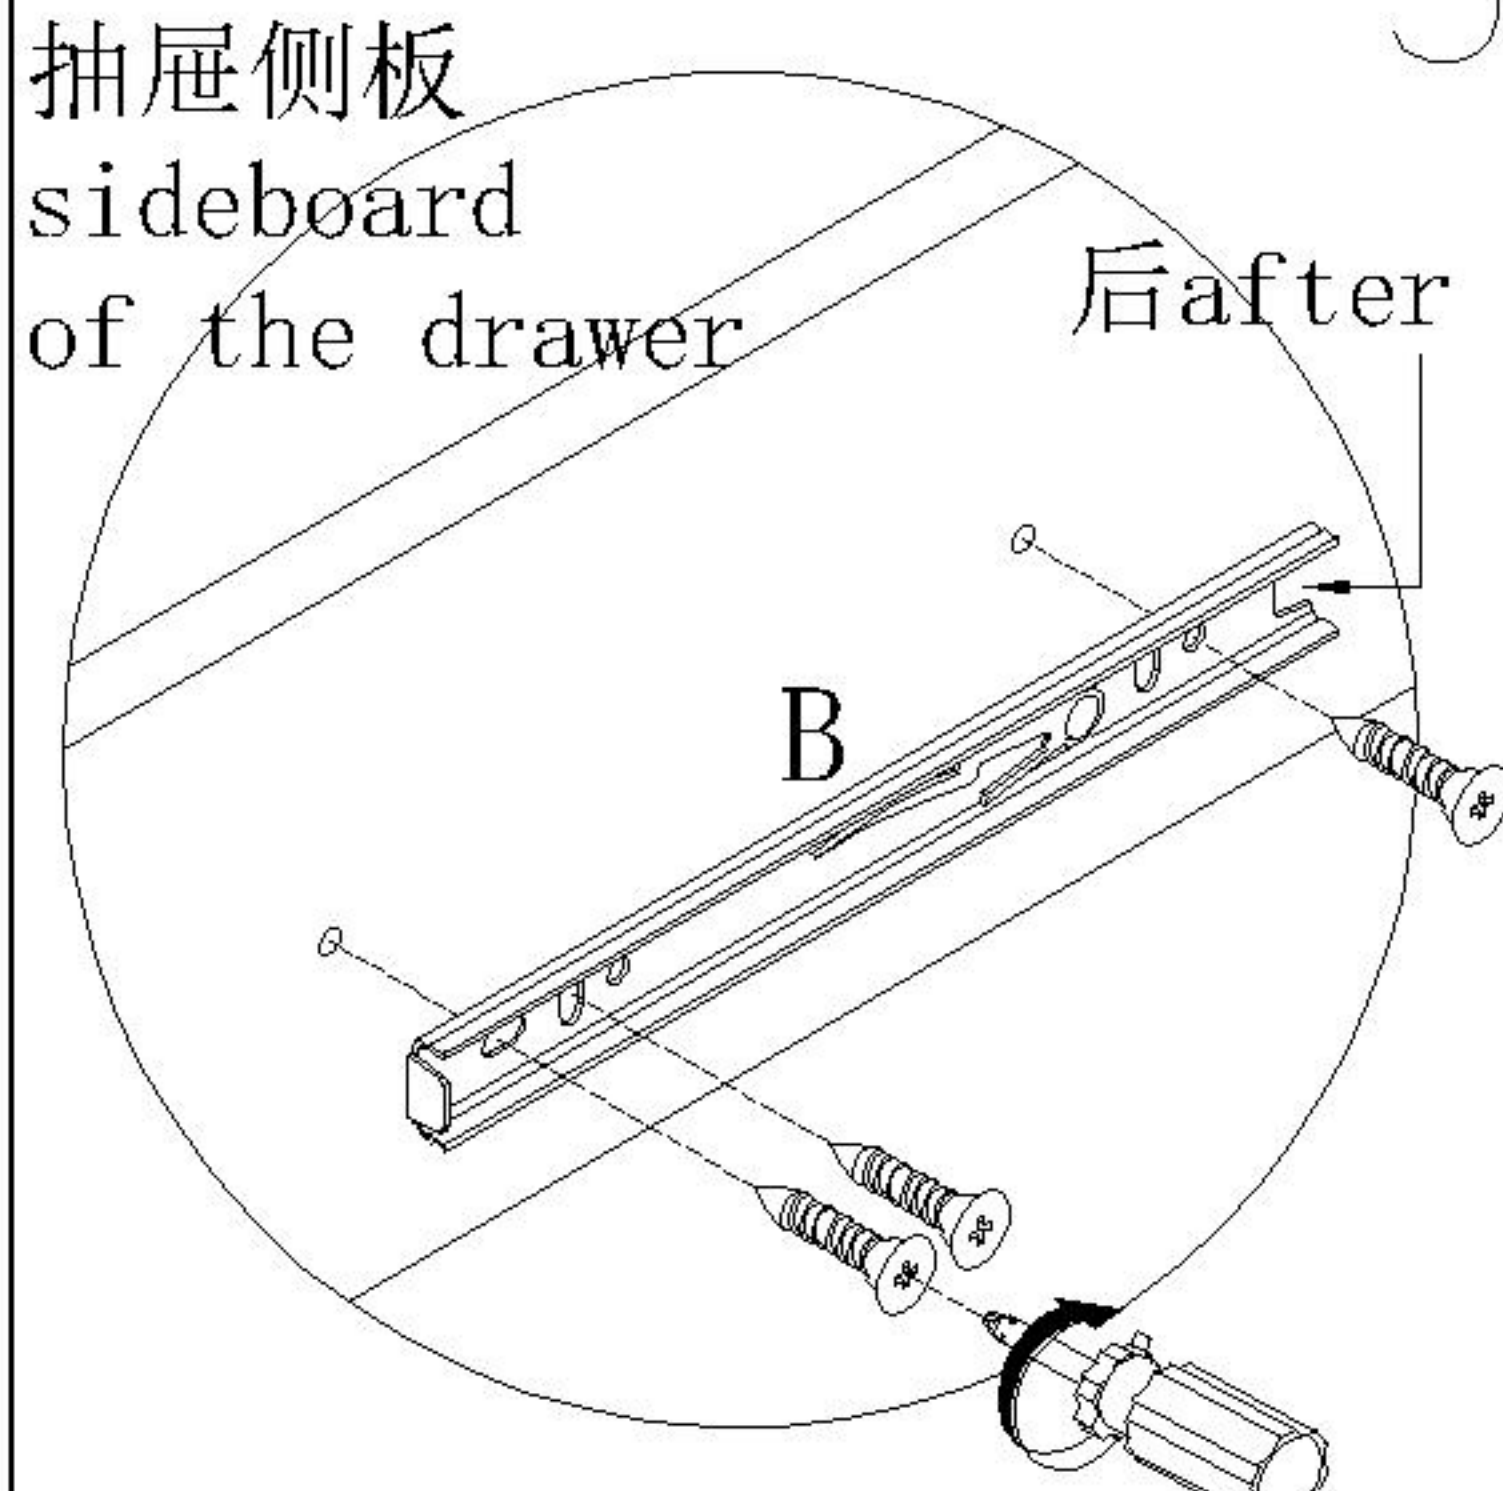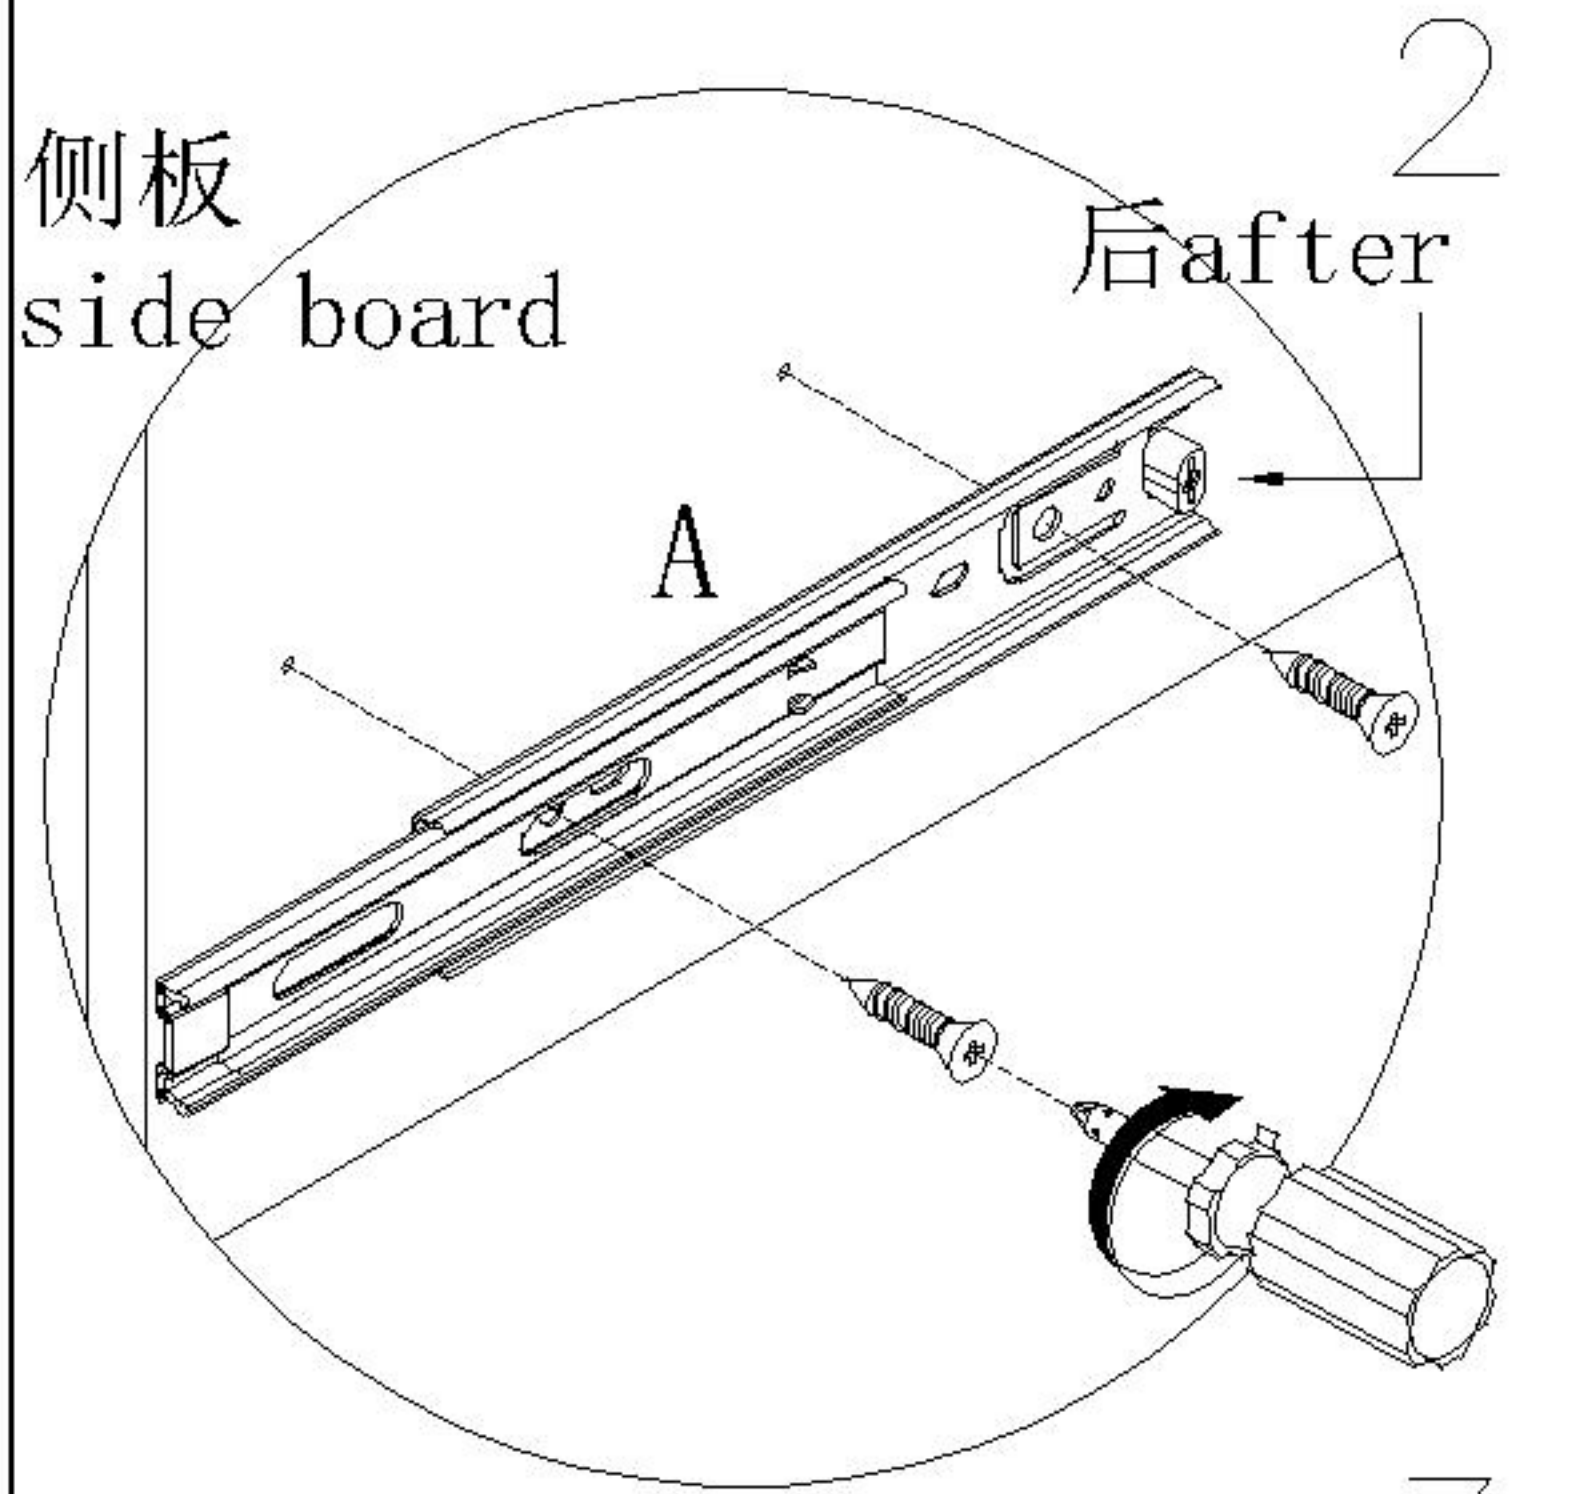

注: 将B对准A后推进去
Note: align B with a
and push it in

三节滚珠导轨
three-section ball rail

