

**NOW AS
EASY TO
CHOOSE
AS IT IS
TO USE.**



Our new look ranges make choosing the right product for the job quick, easy and simple.



The Builders' Brand



THE BUILDERS' BRAND

INNOVATION PIONEERS FOR 25 YEARS

ALWAYS HERE TO HELP

Technical support online and on the end of the 'phone means that you get the right advice every time.

OUTSTANDING QUALITY

In-house research and testing delivers quality products every single time.

OUR **CAPABILITY**

Made in the UK, we can manufacture up to 1,100 tonnes of mortars every single year.

Simple and easy-to-apply 3-part system.

As shower and wet room areas become more popular, it is essential to achieve a totally watertight seal behind tiled areas as failure to do so will almost certainly lead to water leakage. The Aquaseal Tanking Kit lets you create a permanently flexible watertight membrane before tiling a shower, wet room, wet zone in a bathroom or other tiled areas subject to water exposure such as balconies and partially covered external areas.

Aquaseal® Tanking Kit Waterproof Wet Room System

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
AQWRSKIT	LARGE	1	33	5029347611149
AQWRSSDKIT	STANDARD	1	40	5029347611262

The Aquaseal Wet Room System Tanking Kit gives you everything you need to waterproof both walls and floors prior to tiling showers, wet rooms, wet zones and other areas susceptible to water and excessive moisture. Ideal for use on plasterboard, MDF, plywood, cementitious boards, blockwork, concrete and specialist wet room boards. The kit comes complete with:

- Aquaseal Waterproof Tanking Primer – For use before applying Tanking Membrane & Tanking Tape.
- Aquaseal Waterproof Tanking Membrane – Forms a permanently flexible watertight membrane, applied by brush, two coats.
- Aquaseal Waterproof Tanking Tape – Self adhesive joint and corner sealing tape. Easy to apply with pre-cut release liner.
- Aquaseal Waterproof Tanking Drain Mat – Self adhesive butyl backed fleece, capable of coping with movement around the drain outlet.
- Aquaseal Wet Room System User Leaflet.



Aquaseal® Tanking Tape Waterproof Wet Room System

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
AQWRSTAPES	5M	2	210	NO BARCODE

Aquaseal Waterproof Tanking Tape is a self adhesive joint and corner tape. A permanently flexible butyl backed fleece with cross directional stability. Can be tiled directly or overcoated with Aquaseal Waterproof Tanking Membrane for full wet zones and is easy to apply with a pre-cut release liner.

- For showers, wet rooms and wet zones in bathrooms.
- Can be used on all board joints, corners and pipe entries.




Aquaseal® Tanking Membrane Waterproof Wet Room System

CODE	SIZE	COLOUR	BOX QTY	BOXES PER PALLET	BARCODE
AQWRMEM5	5LTR	BLUE	1	60	5029347611163

Aquaseal Waterproof Tanking Membrane is the ideal ready-to-use waterproofing compound. It provides a permanently flexible watertight membrane on floors and walls prior to tiling in shower areas, wet rooms and wet zones, and other areas subject to water exposure.

- For showers, wet rooms and wet zones in bathrooms.
- For waterproofing before tiling.
- Use on plasterboard, MDF, plywood, cementitious board, brickwork, concrete & specialist wet room boards.
- Can be used with underfloor heating.

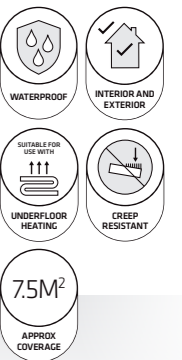

3-part Wet Room Tanking System

1



Tanking Primer

Apply by brush to all porous and semi porous surfaces in the areas that are to be waterproofed. For extremely porous surfaces, apply a second coat when dry (after 1 hour).

2



Tanking Tape & Mat

Apply the self adhesive Tanking Tape to all corner joints, board joints and pipe penetrations to create a watertight seal that accommodates multi-directional movement. Use the roller supplied to press down the tape. The Standard kit contains a 5 metre roll usually sufficient for the corners covering 4.5m². The Large kit contains 2 x 5 metre rolls covering 7.5m². Next, apply the self adhesive Drain Mat capable of coping with board movement around the drain outlet, which is the area most susceptible to water leaks.

3



Tanking Membrane

The ready-to-use Tanking Membrane is applied by brush in a 2 coat system at right angles to each other to create a permanently flexible watertight membrane. Non-hazardous, it is quick drying and tiling can begin after 12 hours. Detailed application instructions are given on each product within the kit.



Our new-look range of repair compounds and grouts.



Product Specification



Product name	Febset 45 Rapid	Febgrout Flowable	Quick Mac
Description	Rapid repair mortar	Installation grout	Ready mixed tarmac
Old product code	-	FBGROUT25	-
Product code	FBSET45	FBGRTFLO25	QMAC25
Product size	25kg	25kg	25kg
Pallet quantity	40	40	39
Barcode	5029347607630	5055492703156	5029347603144

Features

Location	Interior and exterior	Interior and exterior	Exterior
CE mark	✓ EN1504-3	✓ EN1504-6	✗
Compressive strength class	R4	-	-
Compressive strength 1 day	44 N/mm ²	~20 N/mm ²	-
Compressive strength 7 days	53 N/mm ²	~40 N/mm ²	-
Tensile strength 28 day	-	~2.5 N/mm ²	-
Flexural strength 28 day	-	~9 N/mm ²	-
Fill depth	20-100mm	10-150mm	20mm-60mm
Water and rain resistance	✓	✓	✓
Frost resistance	✓	✓	✓
Vibration resistance	-	✓	-
Level of shrinkage	<0.02%	~0.07%	Nil
Trafficable within	45mins @ 20C	12 hours @ 20C	Instantly
Workability time	10-15mins @ 20C	2 hours @ 20C	Unlimited
Suitable as final wearing surface?	✓	✗	✓ @ 20mm depth
Suitable for high traffic areas	✓	✗	✓
Coverage	~0.24 m ² @ 50mm depth	~0.26 m ² @ 50mm depth	~0.4 m ² @ 50mm depth

Substrates


Steel	✓	✓	✗
Concrete	✓	✓	✓
Tarmac	✗	✗	✓

Febset 45 Rapid High Strength Repair Mortar

CODE	SIZE	COLOUR	BOX QTY	BOXES PER PALLET	BARCODE
FBSET45	25KG	GREY	1	40	5029347607630

Febset 45 is a specially formulated repair mortar, based on magnesium-phosphate cement pre-mixed with selected aggregates, which gives controlled, extremely high early strengths in temperatures ranging from -20°C (or lower) up to over 30°C. Trafficable after 45 minutes. High bond strength, no primers required.

- Provides controlled, extremely high early strengths and works in extremely low temperatures.
- Designed for rapid bedding/installing of steel ironwork and bonding streetscape flags, blocks and kerbs.
- Also suitable for general repairs to concrete/stone, kerbs, steps, beams, lintels and cills.

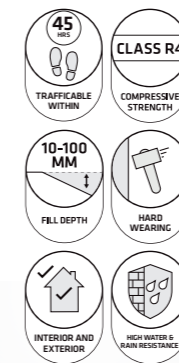


Febgrout Flowable Universal Anchoring Grout

NEW

CODE	SIZE	COLOUR	BOX QTY	BOXES PER PALLET	BARCODE
FBGRTFLO25	25KG	GREY	1	40	5055492703156

Febgrout Flowable is a ready-to-use, high precision flowable grout that can be used as fluid or plastic consistencies for grouting of equipment and machinery, bearing pads, bridge bearings, rails and anchoring. Fills gaps in concrete from 10mm to 100mm wide.

- High precision flowable grout to give high strength, shrinkage compensation, shock, frost and vibration resistance.
- Suitable for grouting of equipment and machinery, bearing pads, bridge bearings, rails and stanchion base plate.
- Also used for filling cavities, voids, gaps, recesses and sealing around penetrations.

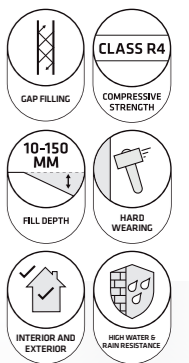


Quick Mac Instant Tarmacadam Repair Compound

CODE	SIZE	COLOUR	BOX QTY	BOXES PER PALLET	BARCODE
QMAC25	25KG	BLACK	1	39	5029347603144
QMACCOLD	750ML	BLACK	12	48	5029347603489

Quick Mac is a high specification Tarmacadam repair compound designed to repair roads, drives and footpaths. May also be used for repairs around roadside ironwork. Ready-to-use cold lay product, maximum 6mm chip size for permanent compaction and instantly trafficable.

- Ready-to-use cold lay product for roads, drives & footpaths.
- Easy to use, just fill and compact down.
- Can also be used for remedial repairs around roadside ironwork.
- Maximum 6mm chip size for permanent compaction.





708 Febflor Universal Self Levelling Compound

CODE	SIZE	COLOUR	BOX QTY	BOXES PER PALLET	BARCODE
SEL20	20KG	GREY	1	50	5029347003012

Perfect for most applications. Levelling floors prior to laying ceramic or thermoplastic tiles, lino, wood block flooring or carpet. Use on internal uneven rigid floors and underfloor heating applications beneath heating systems.

- Cement based, free flowing, sets in 2-4 hours and can be overlaid after only 8 hours at 20°C.
- Mix with Febflor 709 to add moisture resistance, additional flexibility and durability.

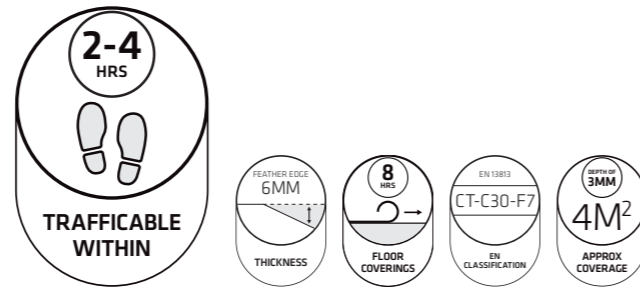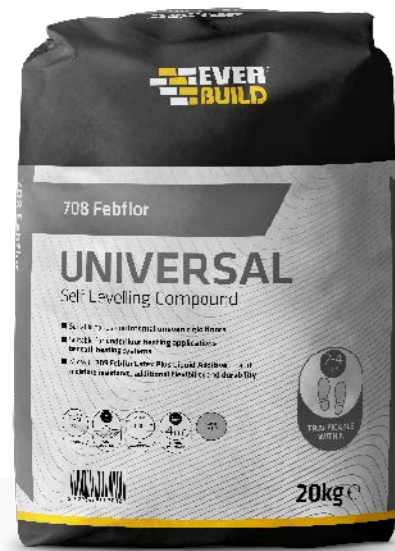

709 Febflor Latex Plus Liquid Additive

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
LAT5	5LTR	4	30	5029347003029

To increase flexibility and durability by adding to flooring compounds and tile adhesives.

- Ideal for use on timber flooring substrates to allow for a limited amount of movement.
- Rubber based latex liquid. 5 litres mixes with a 20kg bag of 708 Febflor Universal Self Levelling Compound.




710 Febflor Flexiplus Latex Self Levelling Compound

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
SLPLUS20	20KG	1	50	5029347071028

For increased flexibility. Use to level out uneven floors where there may be a small level of movement.

- Self-smoothing with added latex powder for improved flexibility, resilience and adhesion.
- Suitable for use on internal uneven rigid floors, underfloor heating applications beneath heating systems.

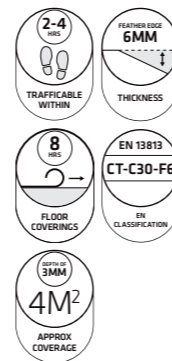

Product Specification



	708 Febflor Universal	709 Febflor Latex Plus	710 Febflor Flexiplus Latex
Product name	Self Levelling Compound	Latex Plus Liquid Additive	Self Levelling Compound
Description			
Product code	SEL20	LAT5	SLPLUS20
Product size	20kg	5ltr	20kg
Pallet quantity	50	4 per box/30 boxes per pallet	50
Barcode	5029347003012	5029347003029	5029347071028

Features

		When mixed with 708 Febflor Universal	
Foot traffic time	2-4 hours	2-4 hours	2-4 hours
Overlay time	8 hours	8 hours	8 hours
Location	Internal	Internal	Internal
Application thickness	Featheredge - 6mm	Featheredge - 6mm	Featheredge - 6mm
Filled thickness (with sand)	6-15mm	6-25mm	6-25mm
Final wearing surface	✗	✗	✗
Suitable for underfloor heating applications*	✓	✓	✓
Suitable for the embedment of underfloor heating elements	✗	✗	✗
Coverage	4m² @ 3mm	4m² @ 3mm	4m² @ 3mm
Water resistance	✗	✗	✗
Frost resistance	✗	✗	✗
Compressive strength class	C30	C30	C30
Flexural strength class	F7	F6	F6
Abrasion resistance	-	-	-

Substrates


Ceramic tiles	✓	✓	✓
Thermoplastic tiles	✓	✓	✓
Lino	✓	✓	✓
Wood	✗	✓	✓
Concrete	✓	✓	✓
Sand or cement screeds	✓	✓	✓
Quarry and terrazzo tiles	✓	✓	✓
Parquet	✓	✓	✓
Cementitious substrates	✓	✓	✓
Asphalt	✗	✗	✓
Brick	✓	✓	✓
Stone	✓	✓	✓

*Suitable for use with underfloor heating applications beneath heating cables/pipes or on top of heated screeds. Please note all data provided is to be used as a guide and is dependant on environmental conditions, please consult data sheets for detailed information.

Jetcem® Deep Rapid Repair Sand & Cement

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
JETMIX6	6KG	2	75	5010618048108
JETMIX2	2KG	6	80	5010618047101


- Strong and easy to use rapid setting repair compound.
- Internal and external repairs to gaps and cracks on walls, floors, steps and kerbstones.
- Repairs deep holes in concrete, stone and brick.

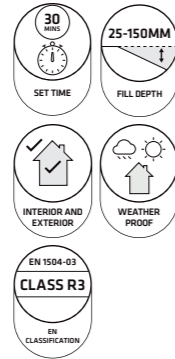

Jetcem® Rapid Repair Cement

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
JETCEM6	6KG	2	75	5010618044100
JETCEM3	3KG	4	64	5010618043103


- Ideal for rapid patching or when a fast repair job is needed.
- Sets in approximately 30 minutes.
- Sets in the cold and wet

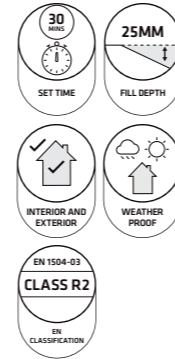

Jetcem® Plaster Rapid Repair

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
JETPATCH6	6KG	2	75	5029347610173


- Fast, strong and easy to use repair compound for patching plaster.
- Internal repairs for plasterboard, brick wood and stone.
- With added PVA powder to increase strength and reduce cracking and shrinkage.



Jetcem® Waterproof Rapid Repair Cement

CODE	SIZE	BOX QTY	BOXES PER PALLET	BARCODE
JETWAT3	3KG	4	64	5029347610166

- Fast, strong and easy to use waterproof repair compound.
- Internal and external repairs to cracks and holes in structures subject to permanent water immersion.
- Ideal for patch repairs to tanking and water retaining structures including ponds.
- Suitable for use on concrete, stone and brick.

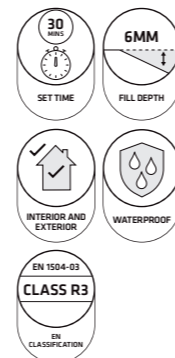

Product Specification



Product Name	Jetcem Deep	Jetcem Rapid	Jetcem Plaster	Jetcem Waterproof
Description	Rapid Repair Sand & Cement	Repair Cement	Rapid Repair	Rapid Repair Cement
Product code	JETMIX6 / JETMIX2	JETCEM6 / JETCEM3	JETPATCH6	JETWAT3
Product size	6kg / 2kg	6kg / 3kg	6kg	3kg
Boxes per pallet	75 / 80	75 / 64	75	64
Barcode	5010618048108 / 5010618047101	5010618044100 / 5010618043103	5029347610173	5029347610166

Features	Jetcem Deep	Jetcem Rapid	Jetcem Plaster	Jetcem Waterproof
Strength classification	R3	R2	-	R3
Fill depth	25-150mm	Up to 25mm	Up to 40mm	Up to 25mm
Set time	30mins	30mins	60mins	30mins
Location	Internal and external	Internal and external	Internal	Internal and external
Sets in	Cold and wet	Cold and wet	Dry	Cold and wet
Weatherproof	✓	✓	✗	✓
Thickness	Over 2.5cm	Up to 2.5cm	Up to 3.8cm	Up to 2.5cm
Open time	5-10 mins	5-10 mins	30-40 mins	5-10 mins
Overpaintable	✓	✓	✓	✓
Reaction to fire	Class A1	Class A1	Class F	Class F
Coverage	~500cm ³ (0.5l)/kg	~500cm ³ (0.5l)/kg	~600cm ³ (0.6l)/kg	~500cm ³ (0.5l)/kg
Tolerant towards permanent water immersion	✗	✗	✗	✓

Substrates	Jetcem Deep	Jetcem Rapid	Jetcem Plaster	Jetcem Waterproof
Plaster	✗	✗	✓	✗
Plasterboard	✗	✗	✓	✗
Render	✗	✗	✓	✗
Wood	✗	✗	✓	✗
Brick	✓	✓	✓	✗
Stone	✓	✓	✓	✗
Ponds and pools	✓	✓	✗	✓
Drains and pipes	✓	✓	✗	✓
Sanitary ware	✓	✓	✗	✓
Concrete	✓	✓	✗	✗
Masonry	✗	✓	✗	✗
Ironwork and steel	✓	✓	✗	✗

NEW LOOK, EASY-FIND PACKAGING

To give you more of what you need we've strengthened the builders brand with new packaging. Colour coded with quick reference icons and streamlined product data for builders on the move.

For more information please contact...

☎ 0113 240 3456

✉ everbuild.sales@uk.sika.com

🌐 everbuild.co.uk



**NOW AS
EASY TO
CHOOSE
AS IT IS
TO USE.**



Our self levelling range makes choosing the right product for the job quick, easy and simple.
Visit everbuild.com for full product range



A SIKA COMPANY

The Builders' Brand