



Filtrec part number: **D121G25B** rev. 1

Filter media: INORGANIC FIBERGLASS

Efficiency: 20 μm (c) $\beta=$ 200
22 μm (c) $\beta=$ 1000

Collapse pressure: 210 bar

Max working pressure: bar


Burst pressure: bar

By-pass valve: NO

By-pass setting: bar

Flow direction: OUT-IN

Seals: NBR

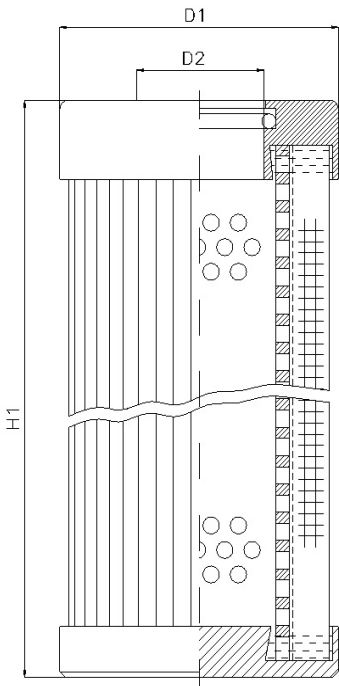

D1=	51	mm
D2=	23,8	mm
D3=		mm
G=		
H1=	207	mm
H2=		mm
H3=		mm

D1=	2,01	inch
D2=	0,94	inch
D3=		inch
G=		
H1=	8,15	inch
H2=		inch
H3=		inch



Technical drawing not in scale

Image is only representative

FOR MORE DETAILS CONTACT FILTREC S.P.A.