



Filtrec part number: **A152G03** rev. 2

Filter media: INORGANIC FIBERGLASS

Efficiency: < 4 μm (c) $\beta = 200$
 4,5 μm (c) $\beta = 1000$

Collapse pressure: 5 bar

Max working pressure: 14 bar


Burst pressure: bar

By-pass valve: NO

By-pass setting: bar

Flow direction: OUT-IN

Seals: NBR

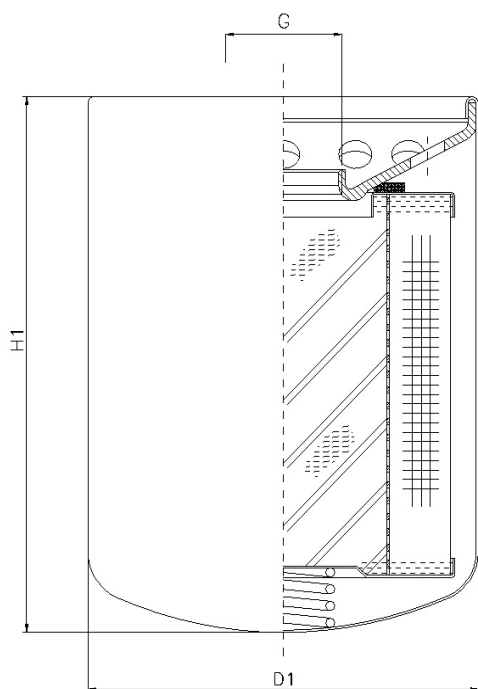

D1=	128	mm
D2=		mm
D3=		mm
G=	1 1/2"-16 UN	
H1=	266	mm
H2=		mm
H3=		mm

D1=	5,04	inch
D2=		inch
D3=		inch
G=	1 1/2"-16 UN	
H1=	10,47	inch
H2=		inch
H3=		inch



Technical drawing not in scale

Image is only representative

FOR MORE DETAILS CONTACT FILTREC S.P.A.