



Filtrec part number: **D112G25B** rev. 1

Filter media: INORGANIC FIBERGLASS

Efficiency: 20 μm (c) $\beta= 200$
 22 μm (c) $\beta= 1000$

Collapse pressure: 210 bar

Max working pressure: bar


Burst pressure: bar

By-pass valve: NO

By-pass setting: bar


Flow direction: OUT-IN

Seals: NBR

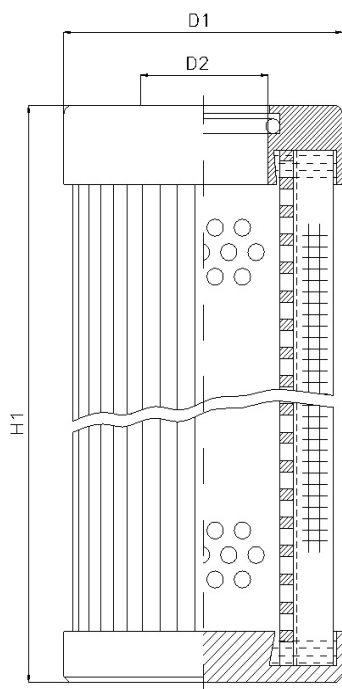

D1=	45	mm
D2=	25,4	mm
D3=		mm
G=		
H1=	210	mm
H2=		mm
H3=		mm

D1=	1,77	inch
D2=	1	inch
D3=		inch
G=		
H1=	8,27	inch
H2=		inch
H3=		inch

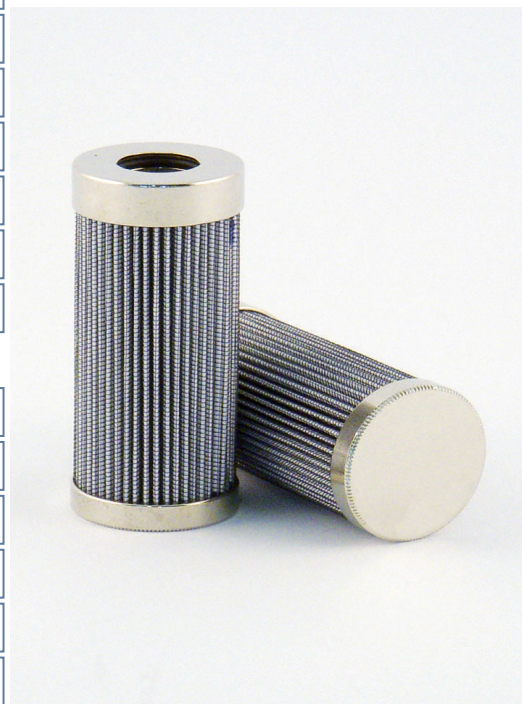

Technical drawing not in scale

Image is only representative

FOR MORE DETAILS CONTACT FILTREC S.P.A.