



UKK SERIES

RETRACTING
CLEANING HEAD

UKK SERIES



UKK is a retractable tank washing head designed for cleaning small containers, tanks, and pipes. **Thanks to its small size and unique design, UKK can be installed flush with the wall** and is an ideal cleaning product where traditional systems have difficulty accessing and operating. Its characteristics make UKK an ideal product in the chemical and pharmaceutical sectors, and the FCMs certification also allows it to be used in the food and beverage sector.

The operation of this cleaning head is simple but highly effective: with an adequate pressure of the feed liquid (between 3 and 7 bar), the nozzle extends by 50 mm and starts the washing action. The flow rate is 35.5 lpm at 3 bar of operation.

The UKK A variant, thanks to introducing a new gasket, cancels the possibility of water infiltration inside the head from the tank with a closed device.


UKK is available in AISI 316 steel as a standard material with the possibility of using other metallic materials such as Hastelloy.



In the picture, UKK A with Viton gasket. PNR Italia can provide other materials on request.




PNR CODING

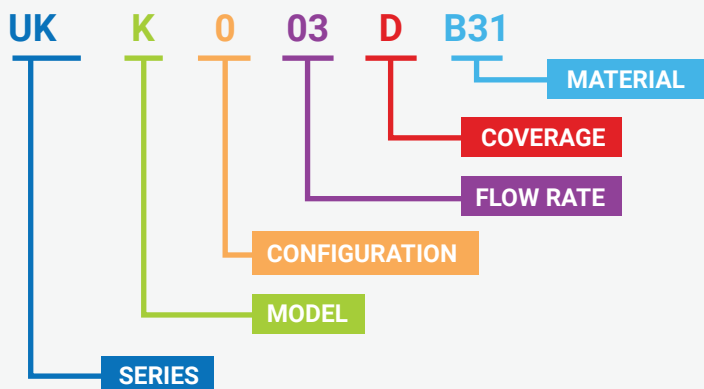

TECHNICAL DATA

FLOW RATE	35,5 l/min @ 3 bar
TEMPERATURE MAX	90°C
BODY MATERIAL	AISI 316L stainless steel
COMPONENT MATERIAL	AISI 316L stainless steel VITON (FKM) PEEK FDA
PRESSURE RANGE	3-7 bar
CONNECTION	Tri-clamp 1" 1/2
COVERAGE	320° up

DIMENSIONAL DRAWING

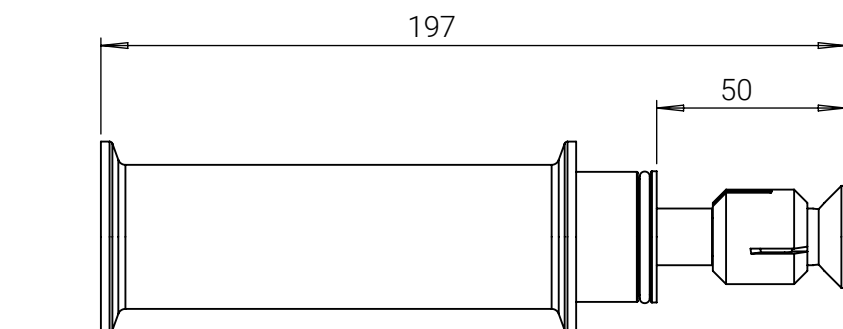

The UKK stroke is 50 mm.

The overall length of the standard version is 197 mm.

The overall diameter of the UKK is 50,5 mm.

The distance between tri-clamp connections is 126 mm.

