



SERIES 75



SLIDING DOOR TRACK SYSTEMS FOR
INTERIOR SLIDING DOORS

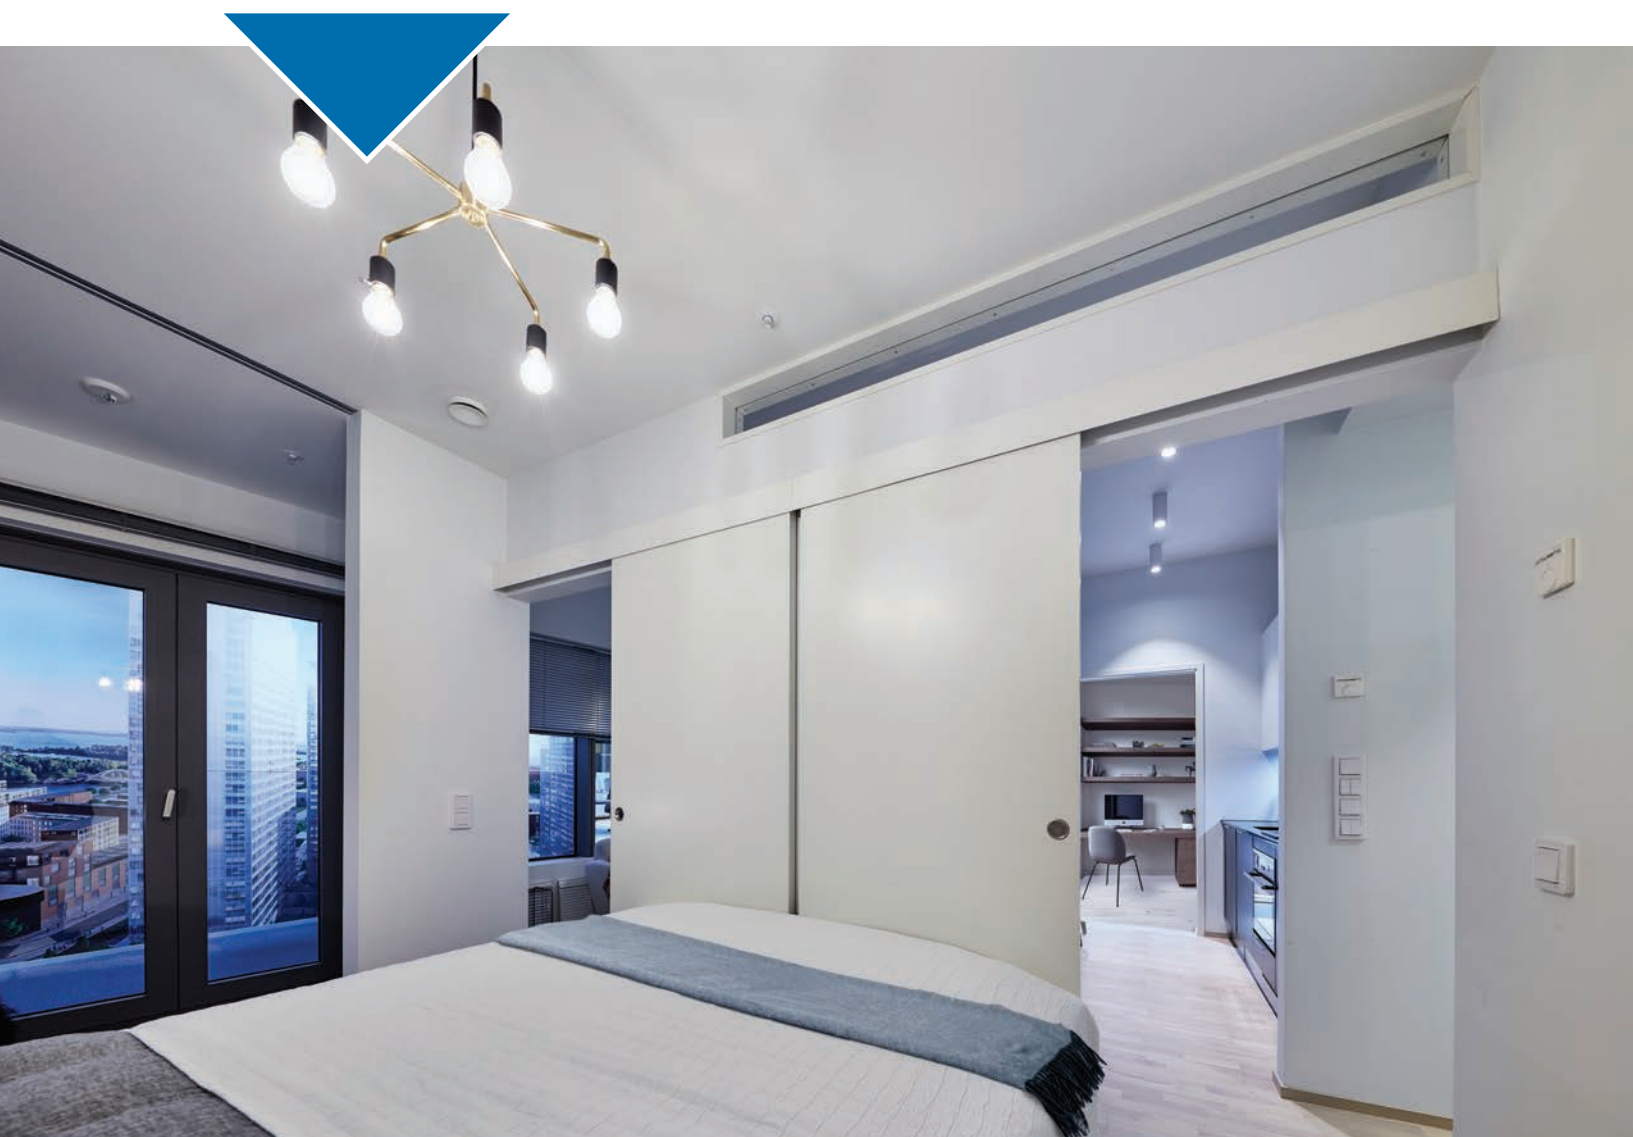

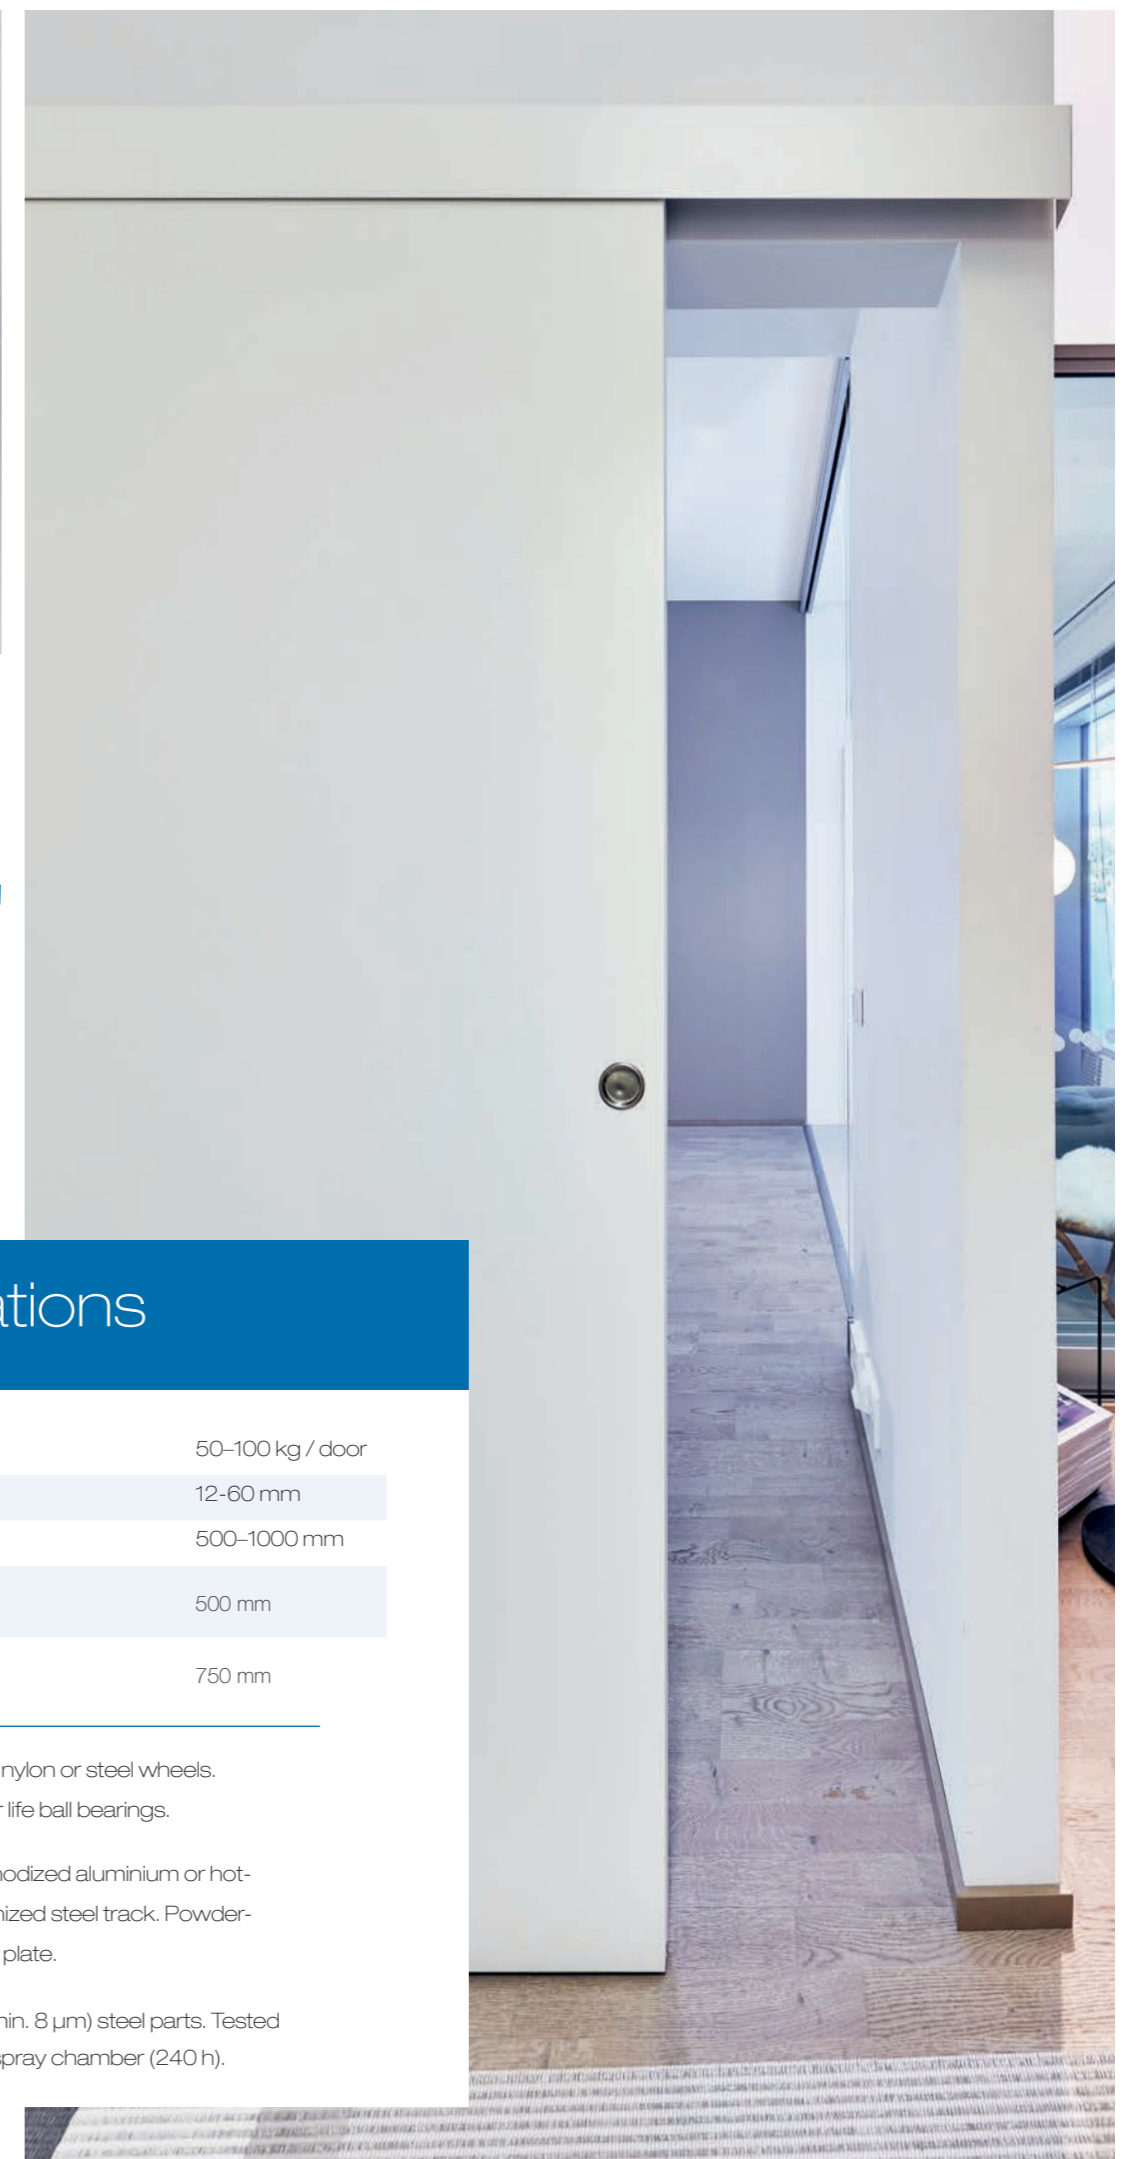

Versatile track system for sliding doors in homes and public spaces

Sliding doors save squares, open spaces, add natural light to rooms, and make it easier to move between spaces. The functionality, appearance and durability of sliding doors are largely determined by which sliding track system is used in the sliding door. That is why it is very important to choose quality products for the sliding door to be installed.

Helaform series 75 is a versatile and high-quality sliding track system for all interior sliding doors and room dividers. Within the series, you will find comprehensive solutions for one or more sliding door systems with numerous accessories. The series also includes durable products suitable for outdoor use if the customer wants sliding doors, for example, for yard buildings.

The most common uses for the 75 series are residential buildings, schools, day care centres, sheltered housing and other public spaces.

” A good sliding door is determined by a high-quality track system

Individual solutions

75 Flow offers many options according to the customer's need or application. Choosing parts within the series adds functionality and ease of use to the sliding door, as well as a finished look. Almost all parts are installed inside the track, are easy to install and can be added to the system afterwards.

Soft Close


Helaform has an advanced Soft Close for sliding doors. It allows the door to be closed and opened slowly and smoothly without the door slams shut. This feature brings tremendous convenience and safety to the use of a sliding door. The Soft Close is installed completely inside the track and can be also added to the system afterwards.


↖ Sliding track system with a low headroom plate gives a finished and seamless look.


↗ 75 Flow track system gets quickly hidden with a ready-made cover plate that installs easily without screws.

Specifications

Weight (max. capacity)	50-100 kg / door
Door thickness	12-60 mm
Bracket interval (max.)	500-1000 mm
Door width (min.) when using 1 soft close	500 mm
Door width (min.) when using 2 soft close	750 mm

 Hangers with nylon or steel wheels. Lubricated for life ball bearings.

 Aluminium, anodized aluminium or hot-dipped galvanized steel track. Powder-coated cover plate.

 Zinc-plated (min. 8 µm) steel parts. Tested in salt-water spray chamber (240 h).

75 FLOW

many solutions



Appearance

Leave the track visible

With the **LHP adjustable plate**, the distance between the door and the track can be adjusted to a minimum, allowing the appearance to continue in style from track to door, creating an almost seamless look for your sliding door. This feature is also perfect for ceiling-concealed track installation.



Hide the track

The cover plate hides the track system, so that only the door and the elegant cover plate remain visible. Cover plates are available in a straight and curved versions that covers the track system also from above. The cover plate is simply clicked into place without need for any screws.



Create your own style

When you want to create a sliding door just for your interior, for example, so that the cover plate fits with the door or wall design, a **facing board holder** can be used. With it you can install your own cover plate (with a certain color or material) to hide the track.



Functionality

The Soft Close closes the door slowly and smoothly. This feature also brings safety and durability to the door use.

The Soft Stop stops the door lightly, damping it and catching it from the hanger, keeping the door closed or open.



The Syncro duo system allows two doors to move on one track so that the doors open simultaneously by moving only one door.



Installation examples

75 Junior


755

Glass


75 Flow
with straight
cover plate

75 Flow
with curved
cover plate



75 Flow
with Low
headroom plate

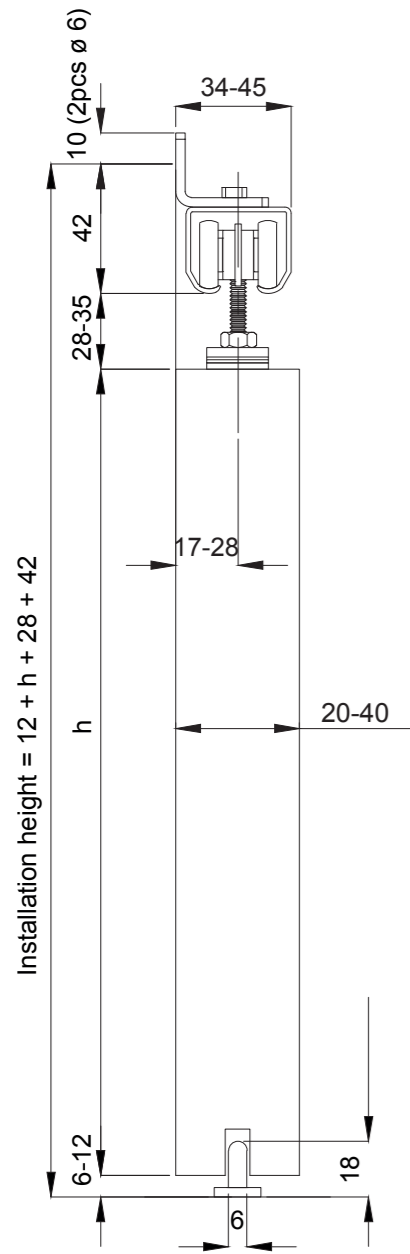


Product 20705

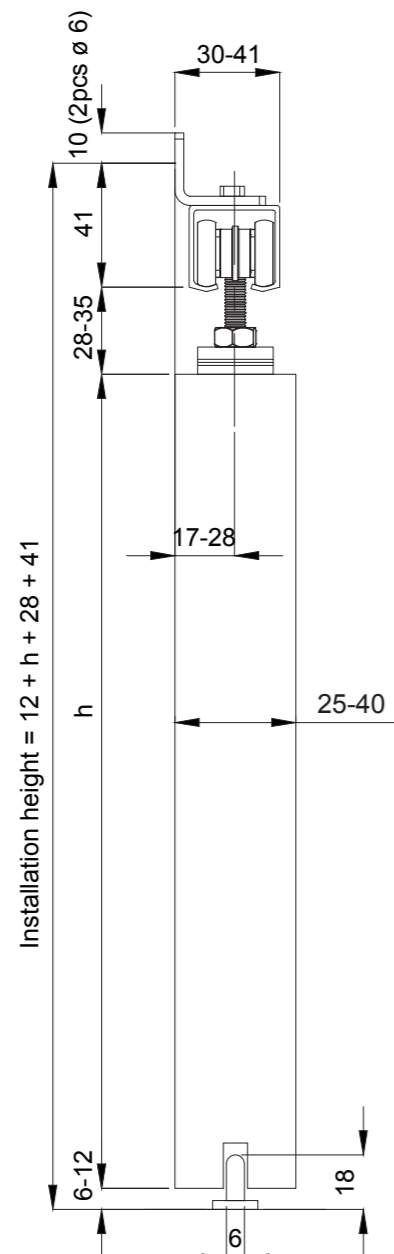


Product 20603, 20604

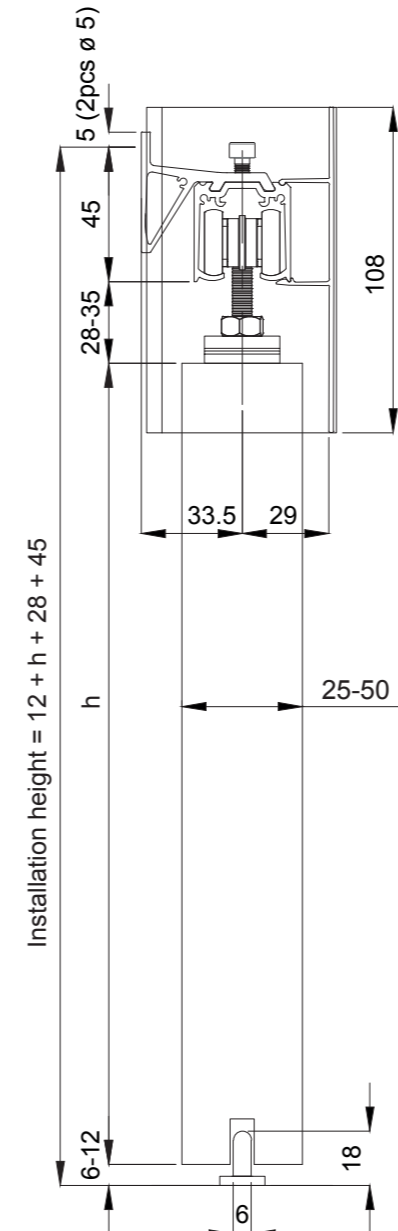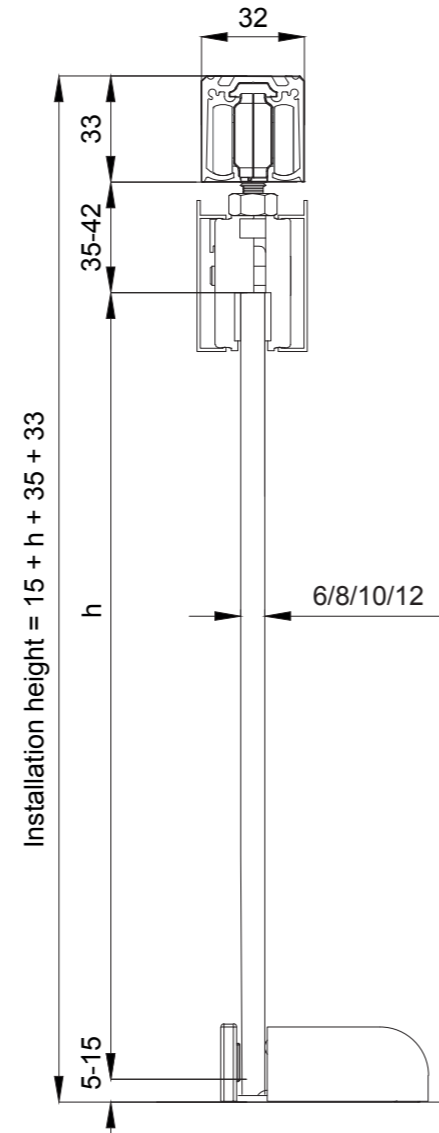

Products 20620, 20621, 20622,
20636, 20637, 20638

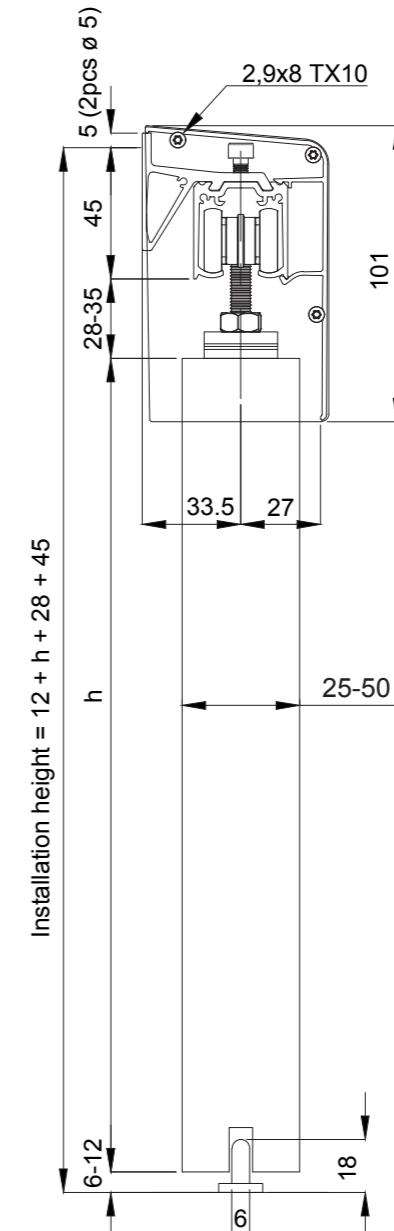

Products 20668, 20670, 20672

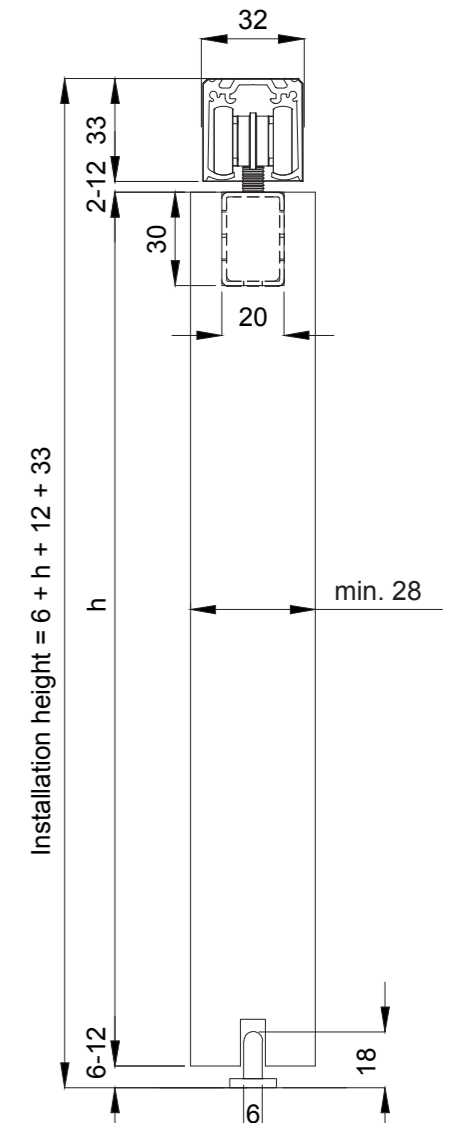

Product 20508
(no track included)

Fittings sets	Track length	Door width (max.)	Accessories	Code
Fittings set with track 75 Junior	2000 mm	1000 mm	-	20705
Fittings set with track 755	2000 mm 2400 mm	1000 mm 1200 mm	-	20603 20604
Fittings set 765	no track included	-	-	20501
Assembly set 775	no track included	-	Low headroom plate	20508

Fittings sets	Track length	Door width (max.)	Accessories	Code
Fittings set with track 75 Flow	2100 mm 2400 mm	1050 mm 1200 mm	Soft close Soft stop	20709 20708
Cover plate set 75 Flow (RAL 9010) with straight cover plate	2100 mm 2400 mm 3000 mm	1050 mm 1200 mm 1500 mm	Cover plate	20620 20621 20622
Cover plate set 75 Flow SC (RAL 9010) with straight cover plate	2100 mm 2400 mm 3000 mm	1050 mm 1200 mm 1500 mm	Cover plate Soft close	20636 20637 20638
Cover plate set 75 Flow (RAL 9010) with curved cover plate	2100 mm 2400 mm 3000 mm	1050 mm 1200 mm 1500 mm	Cover plate	20668 20670 20672

Reference




↳ Inside Finland's tallest tower block in Helsinki's Kalasatama, the interior doors of the apartments slide with Cover plate set 75 Flow

Company

Helaform is a Finnish, family-owned company manufacturing sliding and folding door systems with capacities up to 2,000 kg. With nearly 40 years of experience, Helaform is one of the world's leading suppliers of sliding and folding door systems.

Helaform's product range covers modern architectural and industrial applications as well as ecological enhancements, such as greenhouse plant watering systems.



See installation instructions and -videos from our material bank:
<https://helaform.com/en/materials/>