


## 22C

C Models enable better leverage when handling tall timber with extended tower and faster accumulation. They feature stronger, more durable cast arms contoured for maximum support when accumulating as well as an ultra-reliable disc drive with easily adjustable bearings.

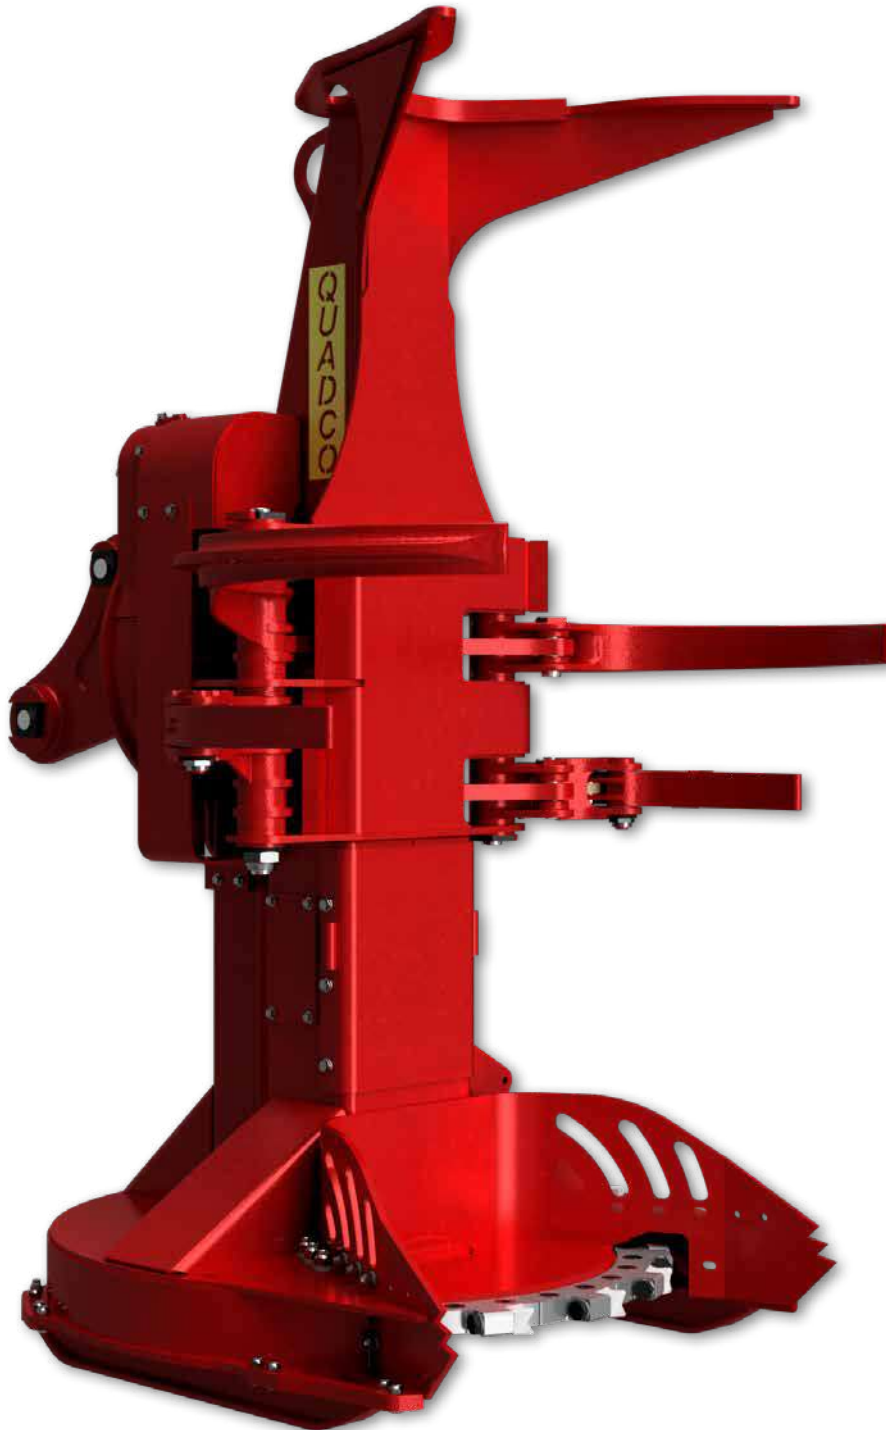

# 22C

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Rotation 40° ( <i>High Torque</i> )	2,942 kg	6,485 lbs
	Rotation 360° ( <i>High Torque</i> )	3,152 kg	7,065 lbs
	Height	2,972 mm	117"
	Width	1,626 mm	64"
	Depth	1,702 mm	67"
	Maximum Throat Opening	1,295 mm	51"
	Maximum Throat Opening @ Teeth	1,041 mm	41"
	Accumulation Area ( <i>Over Blade</i> )	0.45 m <sup>2</sup>	4.8 ft <sup>2</sup>
DISC	Cutting Capacity	559 mm	22"
	Tip-to-Tip Diameter	1,448 mm	57"
	Rated Saw Speed	1,150 rpm	
	Number of Teeth	16	
	Saw Kerf	59 mm	2 5/16"
	Weight ( <i> HOLDERS &amp; TEETH   VARIES DEPENDING ON DISC</i> )	381 kg	840 lbs
	Style ( <i>ONE PIECE OR SEGMENTED</i> )	Both	
HYD.	Grab Arms	1 Cylinder	
	Accumulating Arms	1 Cylinder	