


24C

C Models enable better leverage when handling tall timber with extended tower and faster accumulation. They feature stronger, more durable cast arms contoured for maximum support when accumulating as well as an ultra-reliable disc drive with easily adjustable bearings.

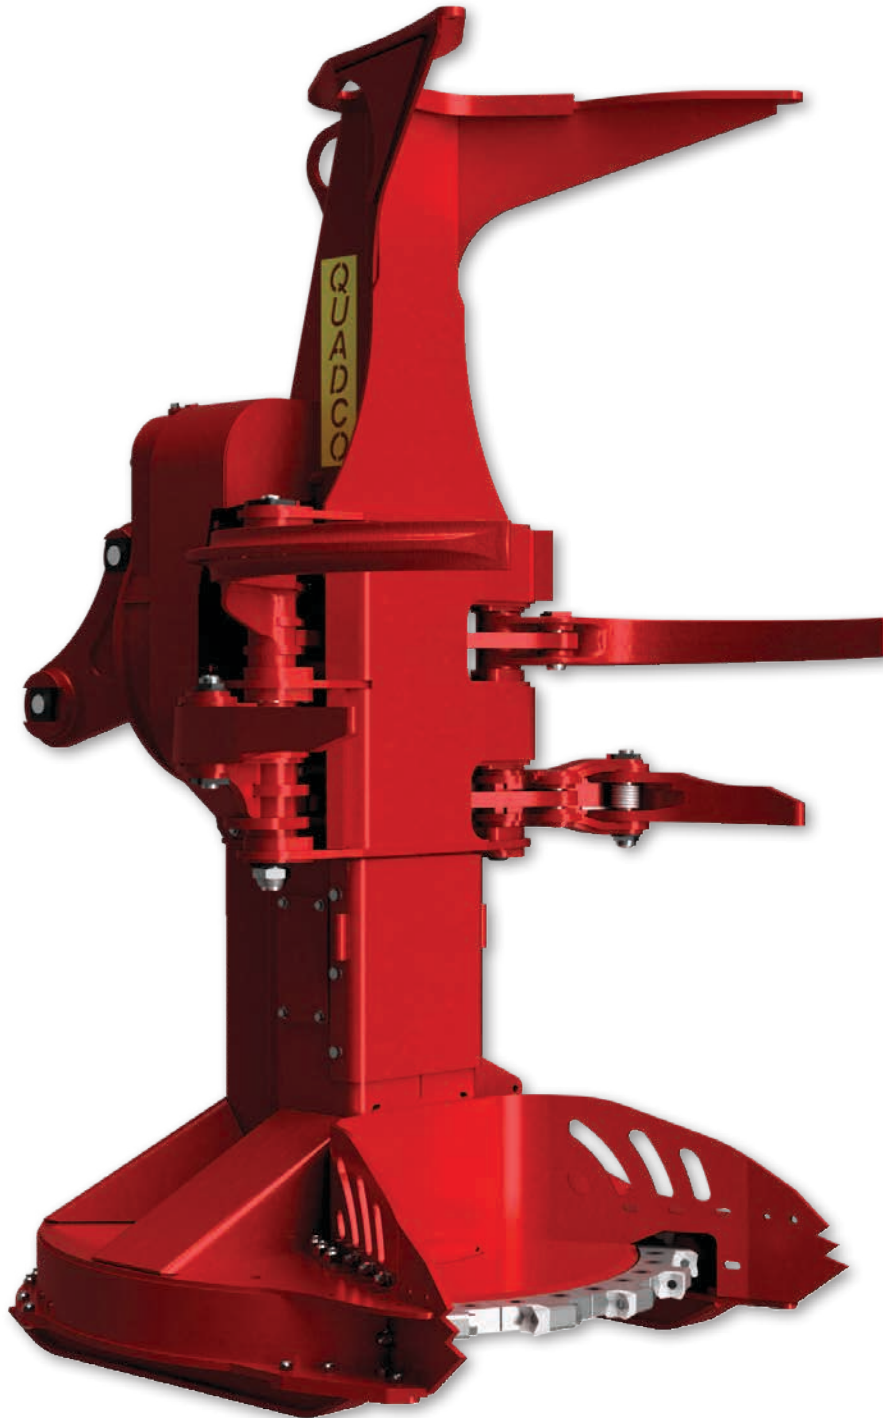

24C

STANDARD CONFIGURATION

METRIC

IMPERIAL

		METRIC	IMPERIAL
WEIGHTS & DIMS.	Rotation 40° (<i>High Torque</i>)	3,044 kg	6,710 lbs
	Rotation 360° (<i>High Torque</i>)	3,255 kg	7,660 lbs
	Height	2,972 mm	117"
	Width	1,778 mm	70"
	Depth	1,854 mm	73"
	Maximum Throat Opening	1,321 mm	52"
	Maximum Throat Opening @ Teeth	1,092 mm	43"
	Accumulation Area (<i>Over Blade</i>)	0.54 m ²	5.8 ft ²
DISC	Cutting Capacity	610 mm	24"
	Tip-to-Tip Diameter	1,549 mm	61"
	Rated Saw Speed	1,075 rpm	
	Number of Teeth	18	
	Saw Kerf	59 mm	2 5/16"
	Weight (<i> HOLDERS & TEETH VARIES DEPENDING ON DISC</i>)	434 kg	956 lbs
	Style (<i>One Piece or Segmented</i>)	Both	
HYD.	Grab Arms	1 Cylinder	
	Accumulating Arms	1 Cylinder	