


Rock Board® LED Vehicle Triangle ID Sign Display Setting Instructions

Set each of the 3 supplied displays.

1. Apply segment blanking stickers to create the desired number.

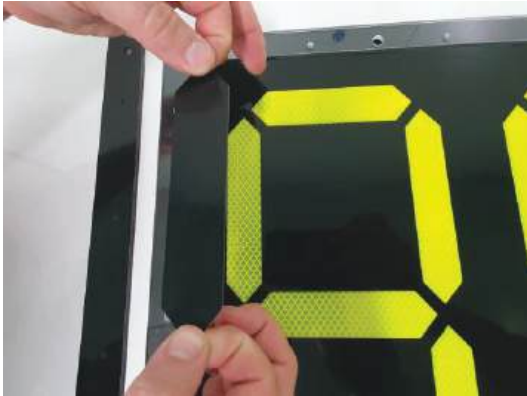

2. Be aware there are 2 different sizes of blanking stickers for horizontal and vertical applications




Ensure segment blanks are firmly pressed into position, sitting flat and cover all of the yellow segment prior to replacing the front housing.

3. Install the display sets with the supplied frame bolts



(Hero Series)
Apply letters from display kit

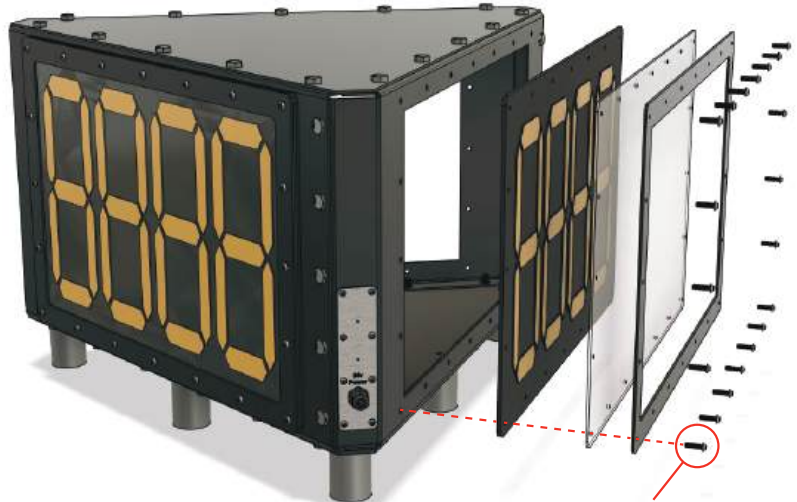

M8x25mm | 5mm HEX
TORQUE: 4NM