Ó|æ•dæ&∖⊹ÁÙ|[œ^åÁÜæậÁ/¦æ&q[¦ÁÖ¦ãç^ÁÇÓWÖËF΀ËÓVSD

8 Yg₩]dh]cb.


V@Á6I8`HfUW1cf`8f]jY`ãÁzd@æç^Ás`ćÁ,^&@e)ã^åÁ[[|Ás^•ã}}^åÁ[Á`]][¦Ásæðā]`•Á,[å^|•Á,-Á[zædā]*Á,æ^¦à|æ-dā*Á@æå•Á[¦Ásu^æ}ā*Á,Æ]}ç^^[¦•Éå,`orãa^•Á;Á čà^Ás`}å|^•ɾ,æ|•ÁeðåáA;c@¦Á`¦æst^•EÅQÁ@erÁeðÁçaáA;[d;¦Á,[,,^¦ā*Áā}^æA;[{æ}}Áæd[]*Ásæð[[c*áAæáðæðåÅséčd;{æstæd|^Á •d;]•Á[Ásu]}d[]A@Áse{[`}of,-Ásæç^|Áse[]*Ás@ÁæáðA;[d;¦Á,ÆæðA;æáA;[å]}&sáA;*^c@¦Á{¦Á[}*^¦Á^}*c@LÁæáðA^}*c@&á`áAs^áAs^Ás^-/^&að;AátAsAsCada;}Á

V@AÓWÖÁ⇔H[、•Á、[č}æ]*Á,AÛŐËHEEAÛŐËI€EAÛŐËD΀Á,¦AÜTËCBEA Ázer•^{à]a∿•ÈAÖ^]^}åã]*Á;}Ás@A^æascáp}}Áv[{A^A`, Avascáp}}A; {æÂ@æç^Á-[{Á,Ă;[Â,Á[||^\+ÈAXæåā;`•Á,[č}c3)*Á,^å^•œ‡+Áse^Á^ččã^åAsa^]^}åã]*Á;}Ás@Azer•<{à]^È

Hc'a U]a]nY'h Y``]ZY'cZh Y'6`UghfUW_`UbX'g`chhYX'fU]`ž]hi]g'fYWca a YbXYX'h Uh'Yhih fi ghbchYl WYYX'' \$\$``Vg"Zcf'Ind]WU'`]bghU``Uhjcbg"`D`YUgY'WcbhUWh GhcbY5 [Y'Zcf'Udd`]WUhjcbg'fYei]f]b[`'Yhih fi ghVYmcbX'' \$\$``Vg"'

CdYfUhjcb.

Use SAE#10 or ISO VG32 Air Tool Oil (StoneAge part# GP 041) in the lubricator. Using oils that are not intended for air tool systems may cause malfunction and/or component damage.

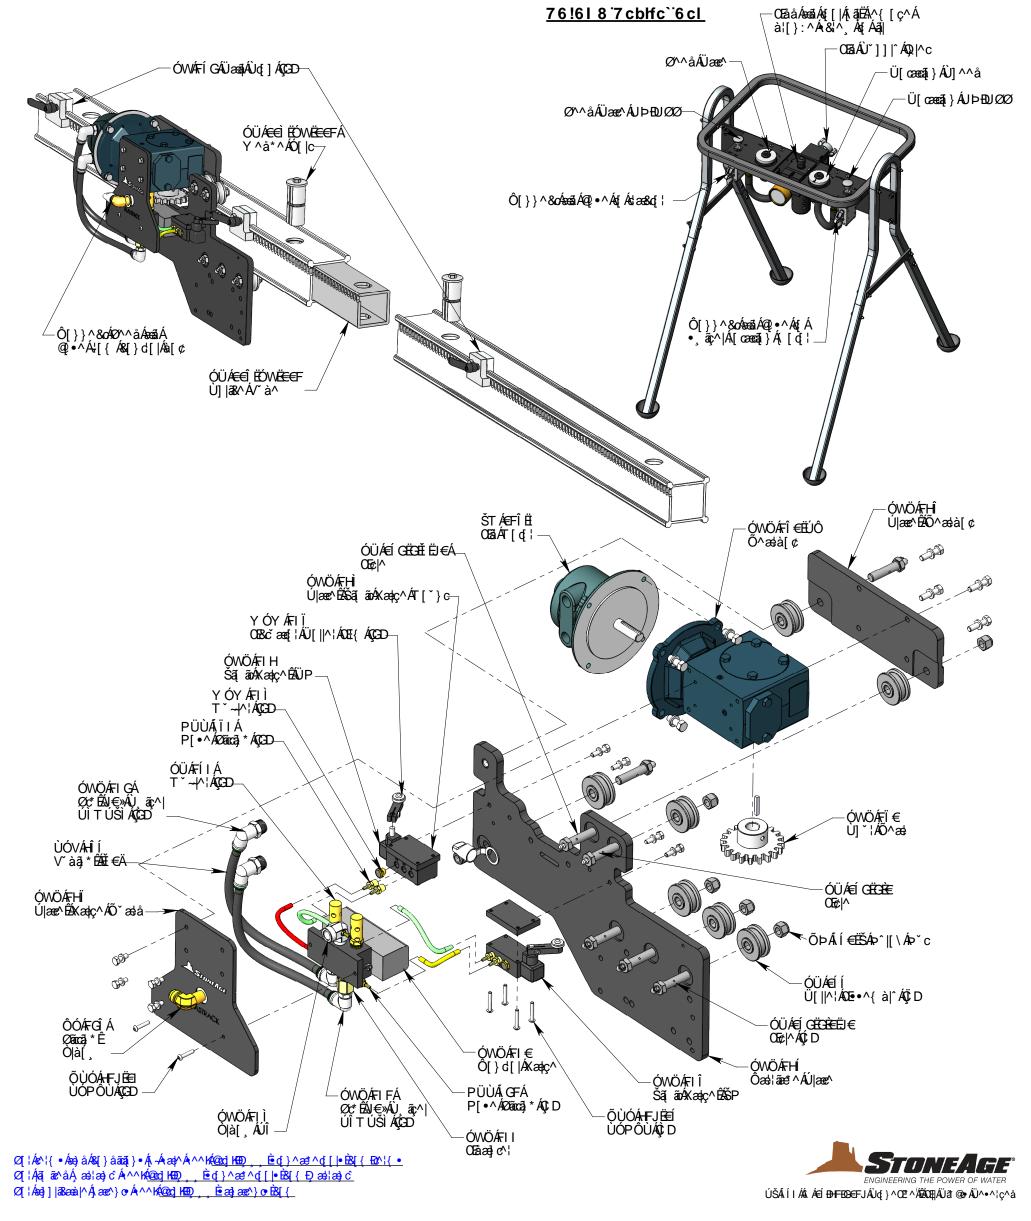

Ó|ædæ&\₁ÁÛ|[œ^åÁÜæậÁ/¦æ&q ¦ÁÖ¦ãç^ÁÇÓWÖËFÎ €ËÓVSD

