




Making A New Landmark of Packaging Tapes !





PRODUCT

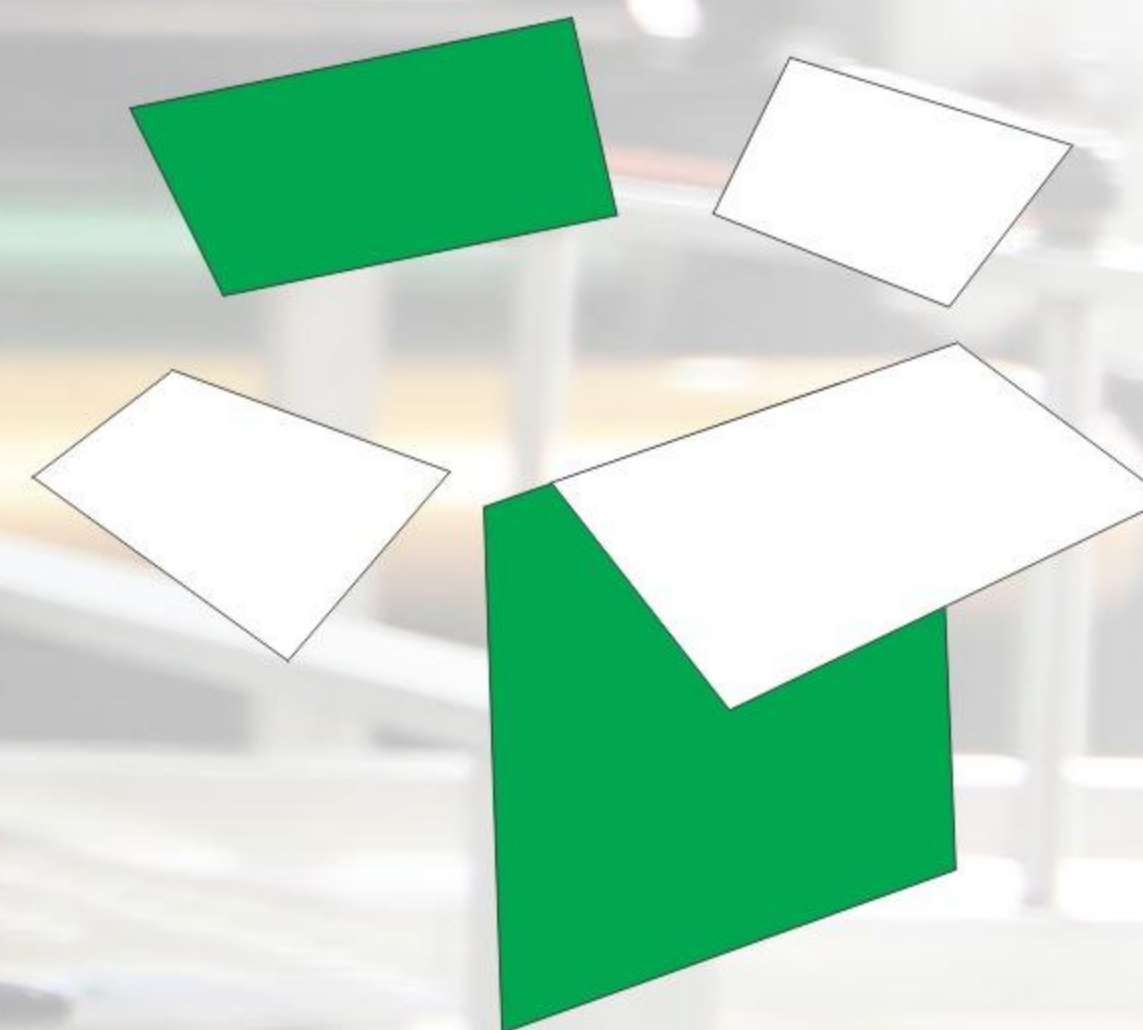

Synthetic Rubber Tape

Thanks for all our valued customers' support, Hyseal was growing healthily in the past years, All of your support and trust have been transferred as our motivation, obligation. In 2014 we start hot melt tape production, hope this will bring one more choice for you and will strengthen our win-win relation...

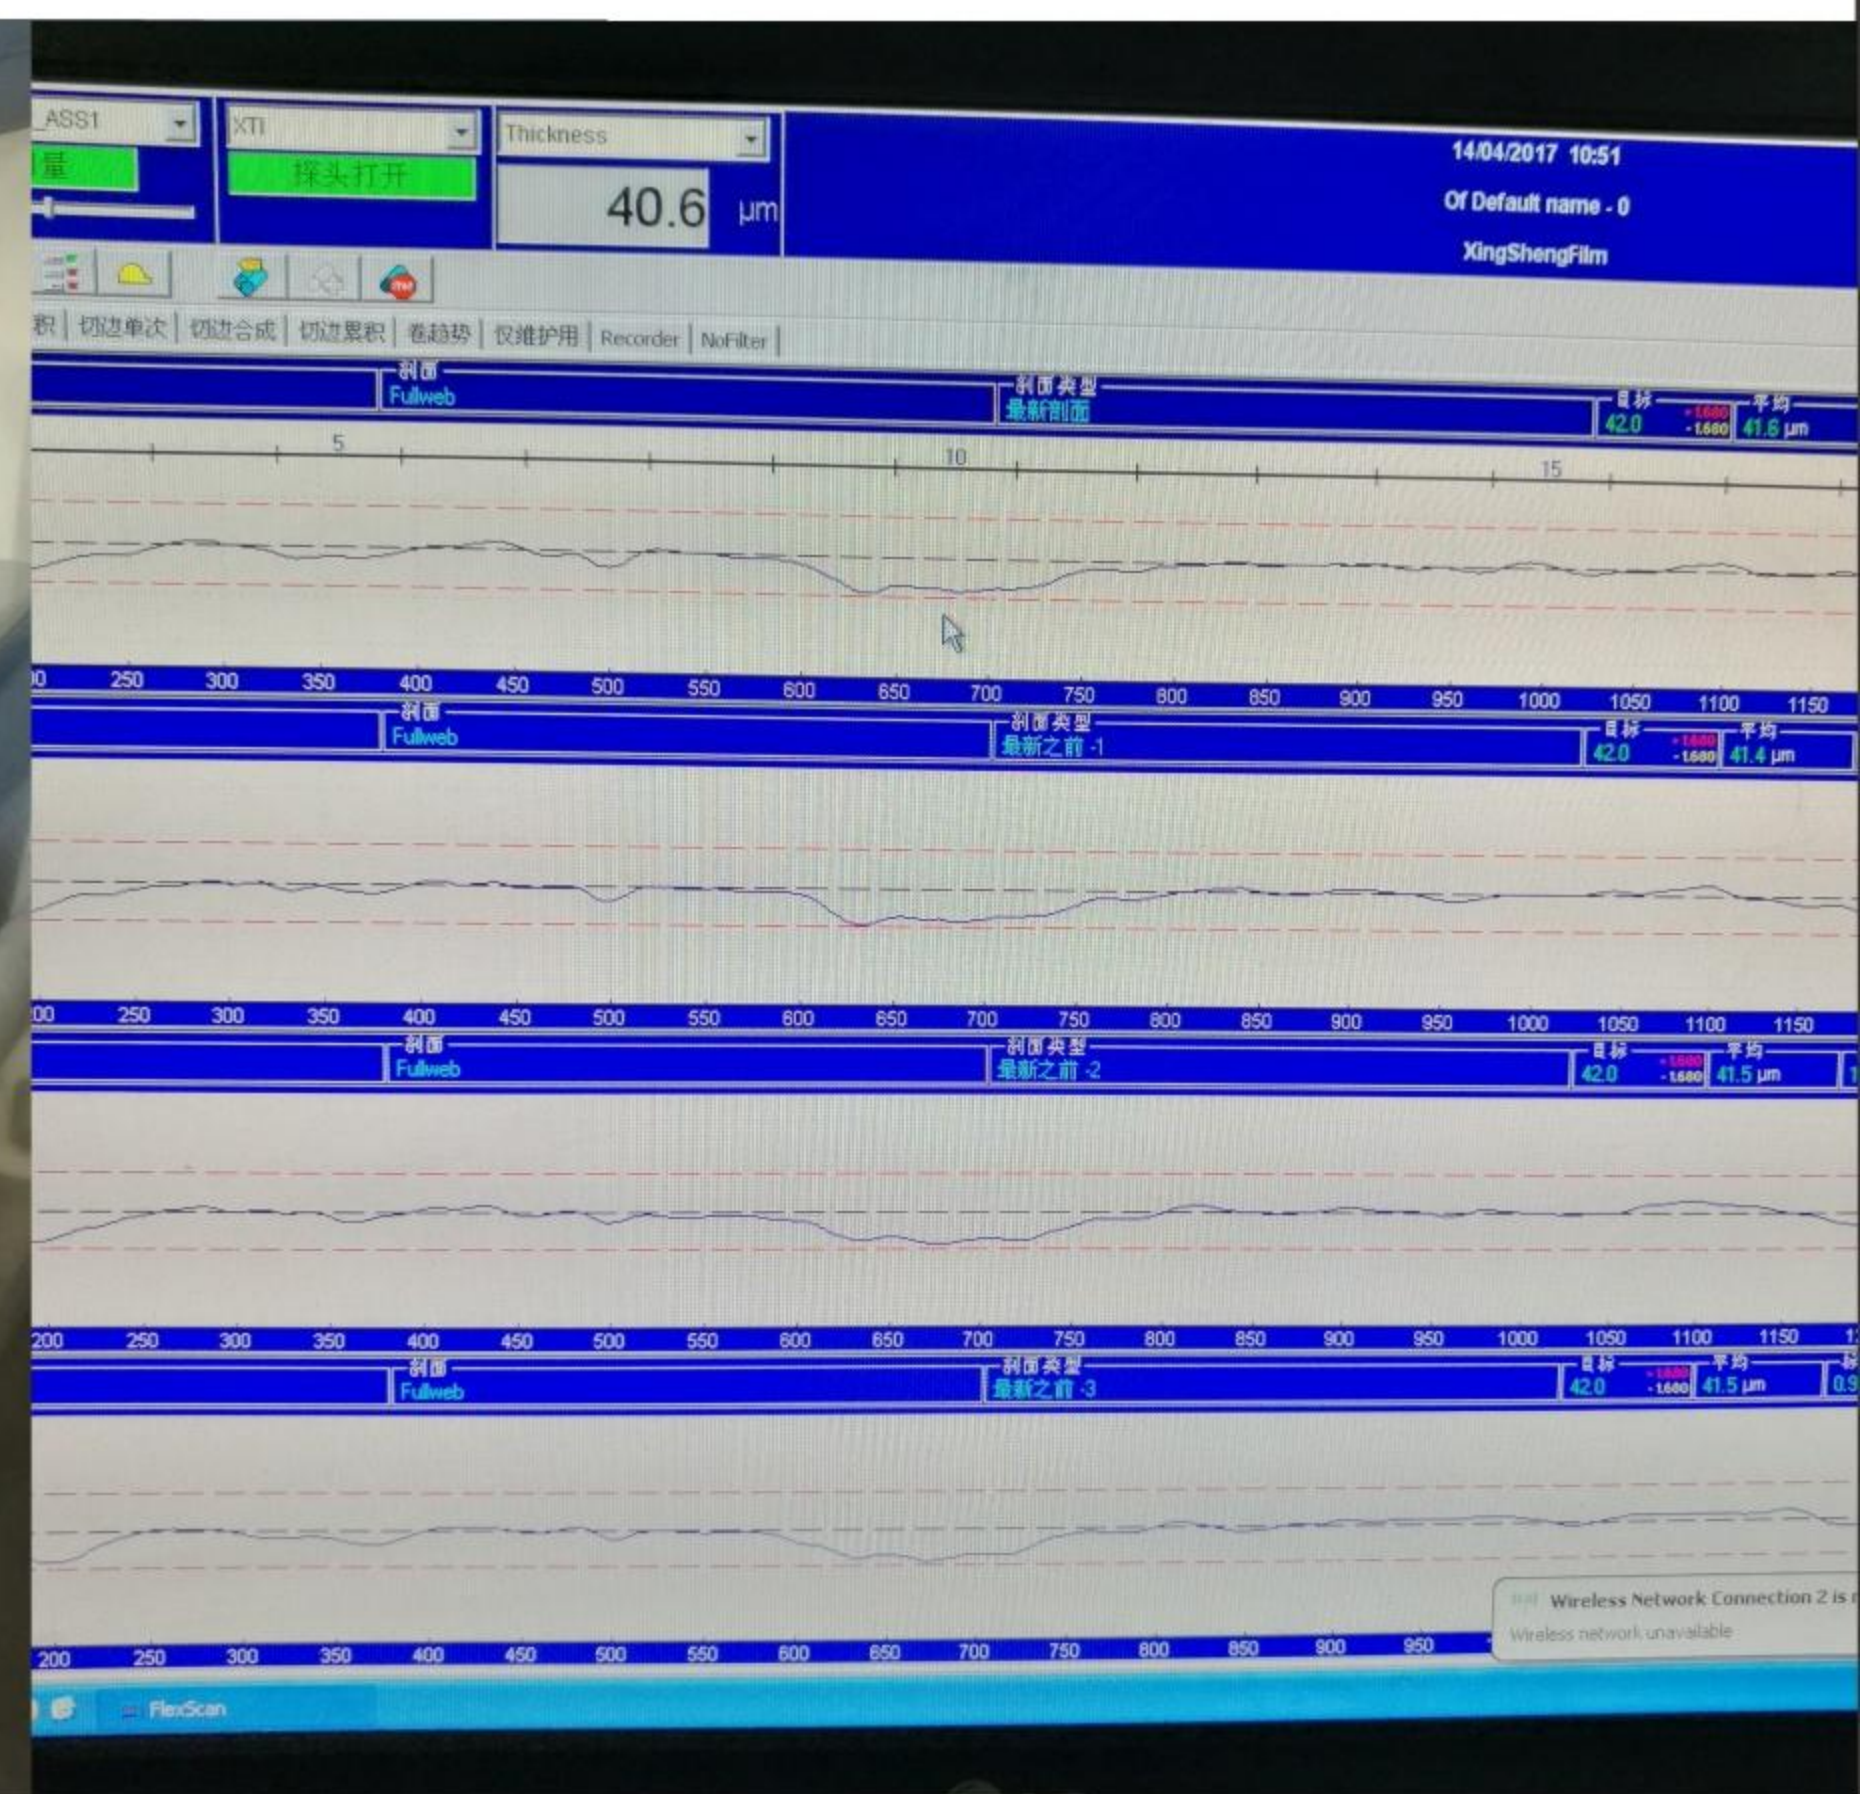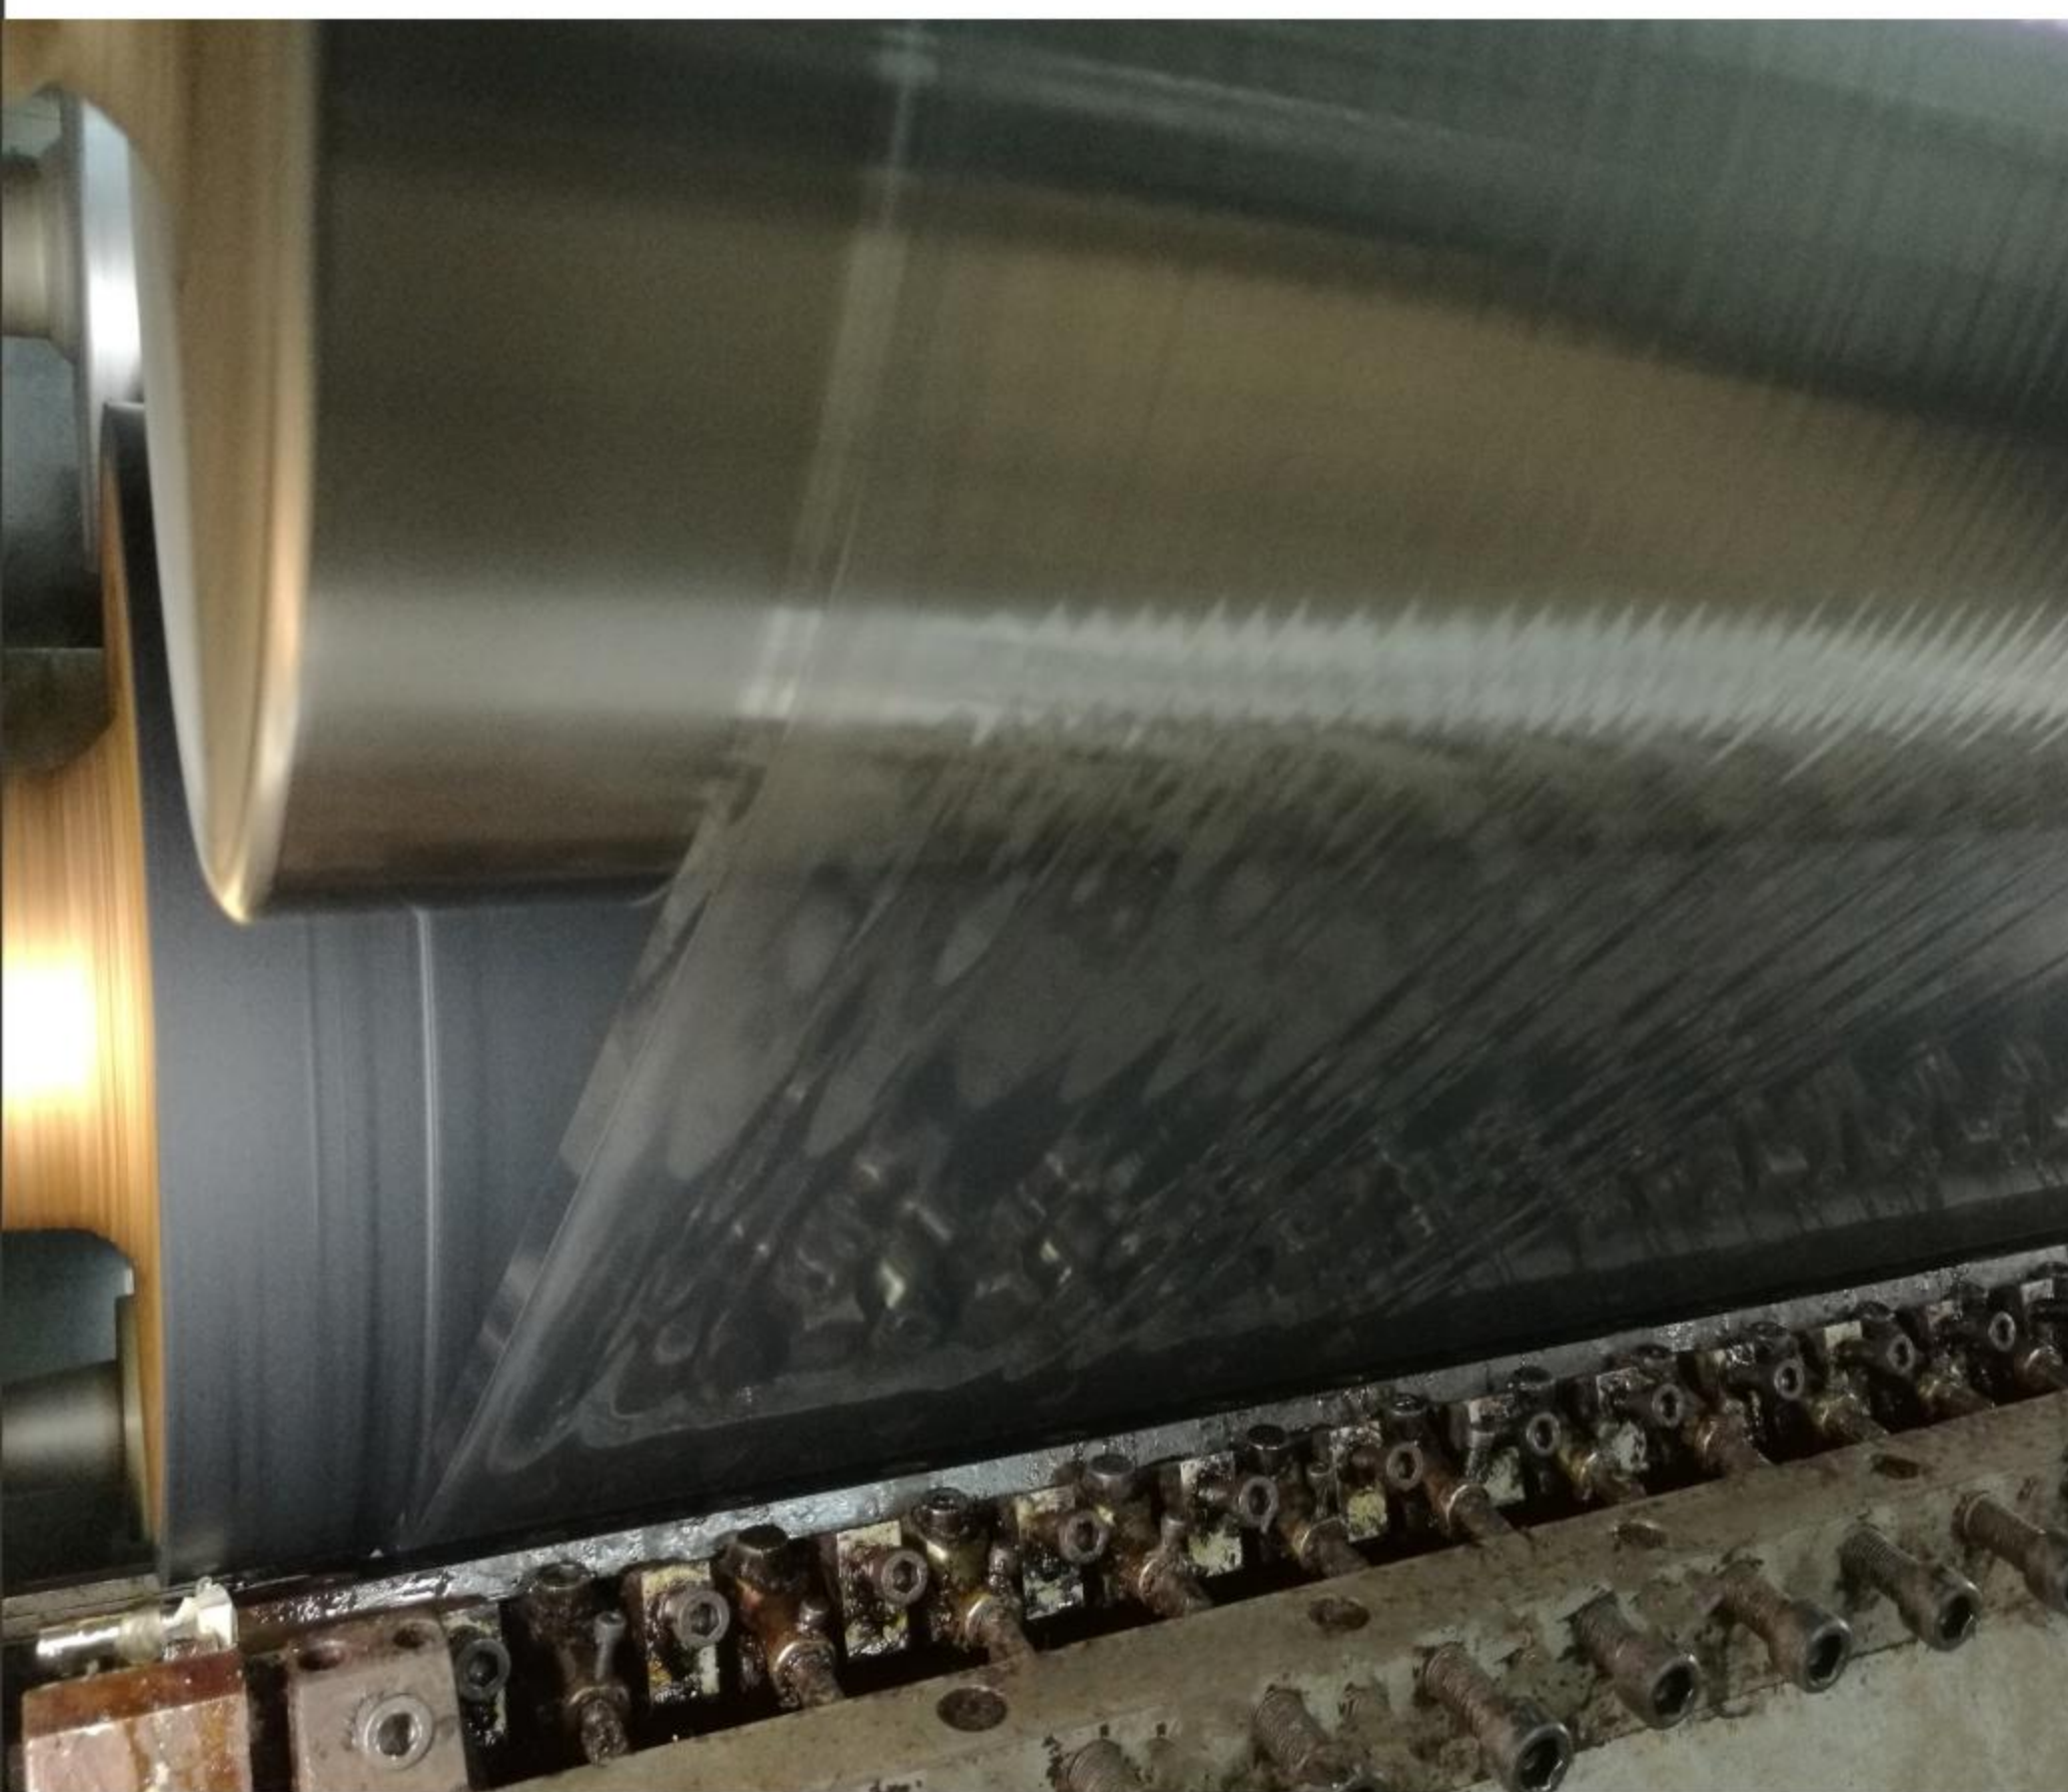

Hot Melt Tape

Film: Biaxial - Oriented Polypropylene

Adhesive: Synthetic Rubber

Width (mm) : 36/38/45/48/50/60/72/75/96

Length (m) : 20~990

Film Available (um) : 25, 28, 30, 32



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Smartape®



.....Making Smartape
with HySeal wisdom.....



Patent number:

ZL 2012 1 0429555.9

saves more than 1...

Features:

- Save cost
- Save storage space
- Save transportation space & charge
- Eco-friendly
- Improve efficiency



Width (mm)	Length (mtr)	Adhesive	Grade	Bopp Film (mu)	Adhesive (gr)	Type	Initial Tack (cm)	Shear Value (hours)	Peeling Adhesion (N/inch)	Tensile Strength (MD)	Elongation at Break (%)
36/38/48 50/72/75	150	Acrylic	Premium	>32	>25	Low Noise	<3	>24	8	95	120
		Acrylic	Industrial	28	24	Low Noise	<4	>24	7	80	110
		Acrylic	Medium	25	22	Low Noise	<5	>24	6.5	65	105
	200	Acrylic	Economy	23	20	Noise	<5	>24	6.5	55	100
		Acrylic	Economy	23	17	Noise	<5	>24	6	55	100
		Hot Melt	Industrial	28	17	Noise	<5	>48	13	80	110
		Hot Melt	Economy	25	16	Noise	<5	>48	10	65	105

Color available: transparent, brown, white, red, orange, yellow, green, blue, black, printed.

PLAN NOISY TAPE

Film: Biaxial-Oriented Polypropylene

Adhesive: Water Base Acrylic

Width: 12~96mm

Film Available: 23/25/28/30/32/38/50um

Total thickness: 36~90um



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com



SERRATED TAPE

- ❖ Serrated Edges.
- ❖ Zero risk to tear off
- ❖ Strong Adhesion
- ❖ Ideal for home & office



EASY TEAR TAPE

- ❖ Rough crushed edges
- ❖ Tear off by correct way
- ❖ Low noise & noisy
- ❖ Ideal for industrial & home use



Tel: +86 769 8130 0836

www.hyseal.com

Email.info@hyseal.com



Plan Low Noise Tape

Width: 75/72/60/50/48/45/38/36mm
25/24/19/18/15/12mm

Length: 50~990m

Film Available: 23/25/28/30/32/38um

Adhesive: 15~25 gr/m²



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Crystal Clear Tape

Film: Crystal BOPP

Adhesive: Water Base Acrylic

Width: 75/72/60/50/48/45/38/36mm
25/24/19/18/15/12mm.

Length(m) : ≤ 132

Film Available: 23/25/28um

Adhesive: 15~24gr/m²



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Sandwich Printed Tape

Color: 1~4 Colors

Width: 12~75mm

Length: 33~990um

Total thickness: 36~60um



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Colorful Tape

Color: Red, Orange, Yellow, Green, Blue
White, Black, Customized

Width: 12~96mm

Length: 33~990m

Total thickness: 40~90um



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Machine Roll



Physical and technical data

- Film: BOPP
- Adhesive: Hot Melt/Acrylic
- Width (mm) : 75/72/60/50/48/45/38/36
- Length (m) : <2000
- Film Available (um) : 23/25/28/30/32



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Block Roll for SIAT Machine



Main Features

Untreated surface (Acrylic One)

★ Special treated surface (Hot Melt One)

Width: 144/150/288/300mm

Length: 914/990/1056/1250/1320/1371m

Color: Clear/White/Color/Customized



Adhesive	Grade	Film (μm)	Adhesive (grm/m²)	Initial Tack (cm)	Shear Value (hours)	Peeling Adhesion (N/inch)	Tensile Strength (N/inch)	Elongation (%at break)
Acrylic	Medium	28	22	<4	>24	7	80	105
Acrylic	Industrial	32	24	<4	>24	8	95	115
Acrylic	Premium	38	26	<4	>24	9	120	120
Hot Melt	Industrial	28	20	<5	>48	14	80	105
Hot Melt	Premium	32	22	<5	>48	14	95	115

● Suggested printing corona treatment for acrylic one: ≤ 31 dynes.



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Tape Dispenser



No. 8125
For 1" core

No. 8325
For 1~3" cores

No. 1525
For 1.5" core

No. 8075
For 3" core

No. 8175
For 3" core



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Stationery Dispenser



Tel:+86 769 8130 0836


www.hyseal.com

Email:info@hyseal.com

Living in our own little world
a little girl



a fairy tale.

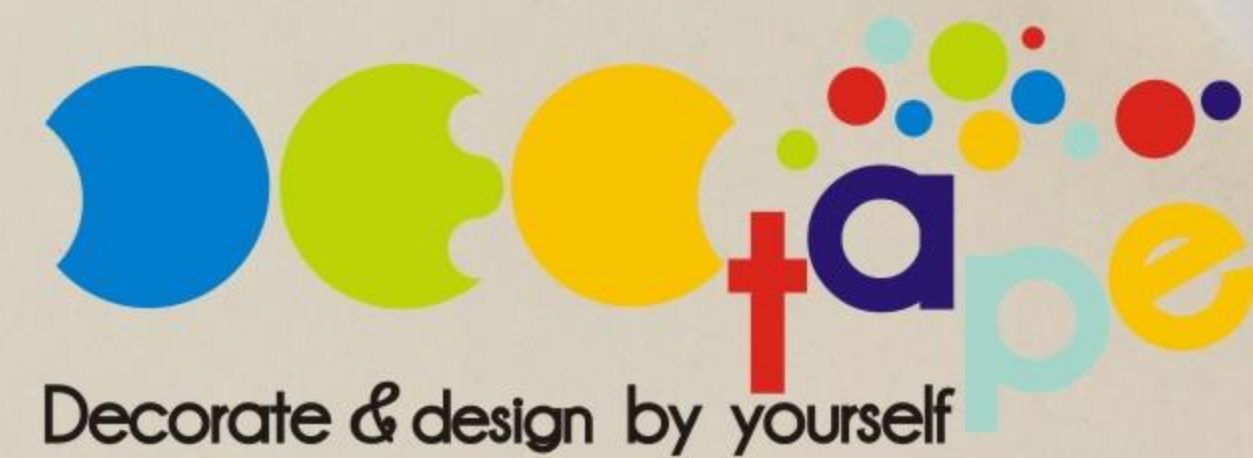

Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Dec-Tape

Decorate & Design by Yourself



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Invisible Tape

Dear our valued customers,
Thank you!

For your years of trust,
This is the only incentive for us,

To keep going and creating more benefits for you!
Time will be the witness.

Regards

Andy



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Office Tape

Ideal for home • school • office



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Masking Tape

Grade A
GP Masking Tape
Temperature Resistance: $\leq 80^{\circ}\text{C}$

Grade B
High Temperature Masking Tape
Temperature Resistance: $\leq 170^{\circ}\text{C}$

These two grades have the same characteristics as follows;
Backing: Crepe paper
Adhesive: Natural rubber
Total Thickness: $130\mu\text{m} \pm 10$
Color: Cream white
Length: $\leq 60\text{m}$
Width: 9/11/12/18/19/24/25/36/38/45/48/50/60/72/75mm

Main applications: painting, light packaging, masking, surface marking
Shelf life: 1 year
Storage: in original packaging in cool, dry area, away from sunlight, moisture
Application: Applied onto clear, dry and oil-free surfaces.



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Anti-slip Tape



Film: PVC
Adhesive: Rubber
Total thickness: depends on Sandy surface
Color: Black, grey, blue, green, red, white, glow or mixed.
Water proof
U.V. resistance
Easy to use
With release paper
Long shelf life



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Cloth Tape

Backing material: Extruded cloth

Adhesive: Natural rubber

Total thickness: 230/250µm

Adhesion to steel: 10.16N/inch

Mesh: 70

Temperature resistance: 80°C

Width available: 18/24/36/48/50/60/72/75mm

Length: 5-50m

Color available: red, orange, yellow, green, blue,
white, black, silver

Main Applications

- » marking, packaging, protecting, fastening
- » Bonding of construction films
- » Closing of cartons
- » Fixing of wires
- » Splicing of films
- » Carpet fixing



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Reflective Warning Tape

Backing material: PET

Adhesive: solvent

Operating temperature: 5-45°C

Shelf life: 3 years

Untearable

Good extensibility

With release paper



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

Electronic and Battery Tape

Film: Polyimide/PET

Adhesive: Silicone

Color: Golden/Green

Temperature Resistance: $-40^{\circ}\text{C} \sim 180^{\circ}\text{C}$

Insulation Resistance: $\geq 1\text{M}\Omega$

Width (mm) : 9/12/15/18/19/24/25/30/36/48



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com

PVC Insulation Tape

Physical and Tehnical Data

- » Backing material: soft PVC
- » Type of adhesive: solvent
- » Total thickness: 150/180 μ m
- » Adhesion to steel: 1.4N/cm
- » Tensile strength: 11N/cm
- » Paper core: 1.5", 3"
- » Suitable for most electrical insulation application such as splicing and protection.
- » Width available: 15mm, 18mm, 19mm
- » Color available: red, orange, yellow, green, blue, white, black



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com



Double Side Tape

Double Side PP Tape ↑ (For special applications)

Backing material: Silicon release paper
Adhesive: solvent, hot melt, acrylic
Liner material: BOPP film
Thickness: 100μm±5
Strong adhesion
High tensile strength



Double Side EVA Foam Tape ↓

Backing material: Silicon release paper
Adhesive: solvent
Thickness: 1mm, 1.5mm, 2mm
Liner material: EVA foam
Paper core: 1.5
Length available: 2-10m

Double Side Tissue Tape ↑ (For general purpose applications)

Backing material: Silicon release paper
Adhesive: solvent, hot melt, acrylic
Liner material: tissue
Thickness: 90/100μm±5
Easy Tear
High tack, double-sticky



Tel: +86 769 8130 0836

www.hyseal.com

Email: info@hyseal.com



PVC Warning Tape

Film: PVC

Adhesive: solvent

Total thickness(um):135

Color: red/white, black/yellow
blue/white, white/black

Application temp(°C):-5~40

BOPP Warning Tape

Backing material: BOPP film

None adhesive

Single/double color printing

Two colors printing

Thickness: 25, 28, 32, 35μ

Ideal replacement for PE warning tape



Tel:+86 769 8130 0836


www.hyseal.com

Email:info@hyseal.com

Aluminium Foil Tape


Versatile heat-shielding tape to seal ducts.

- Linerless
- Waterproof
- Good adhesion
- High peeling adhesion
- U.V. Resistance
- Flame and moisture resistance
- Indoor and outdoor application

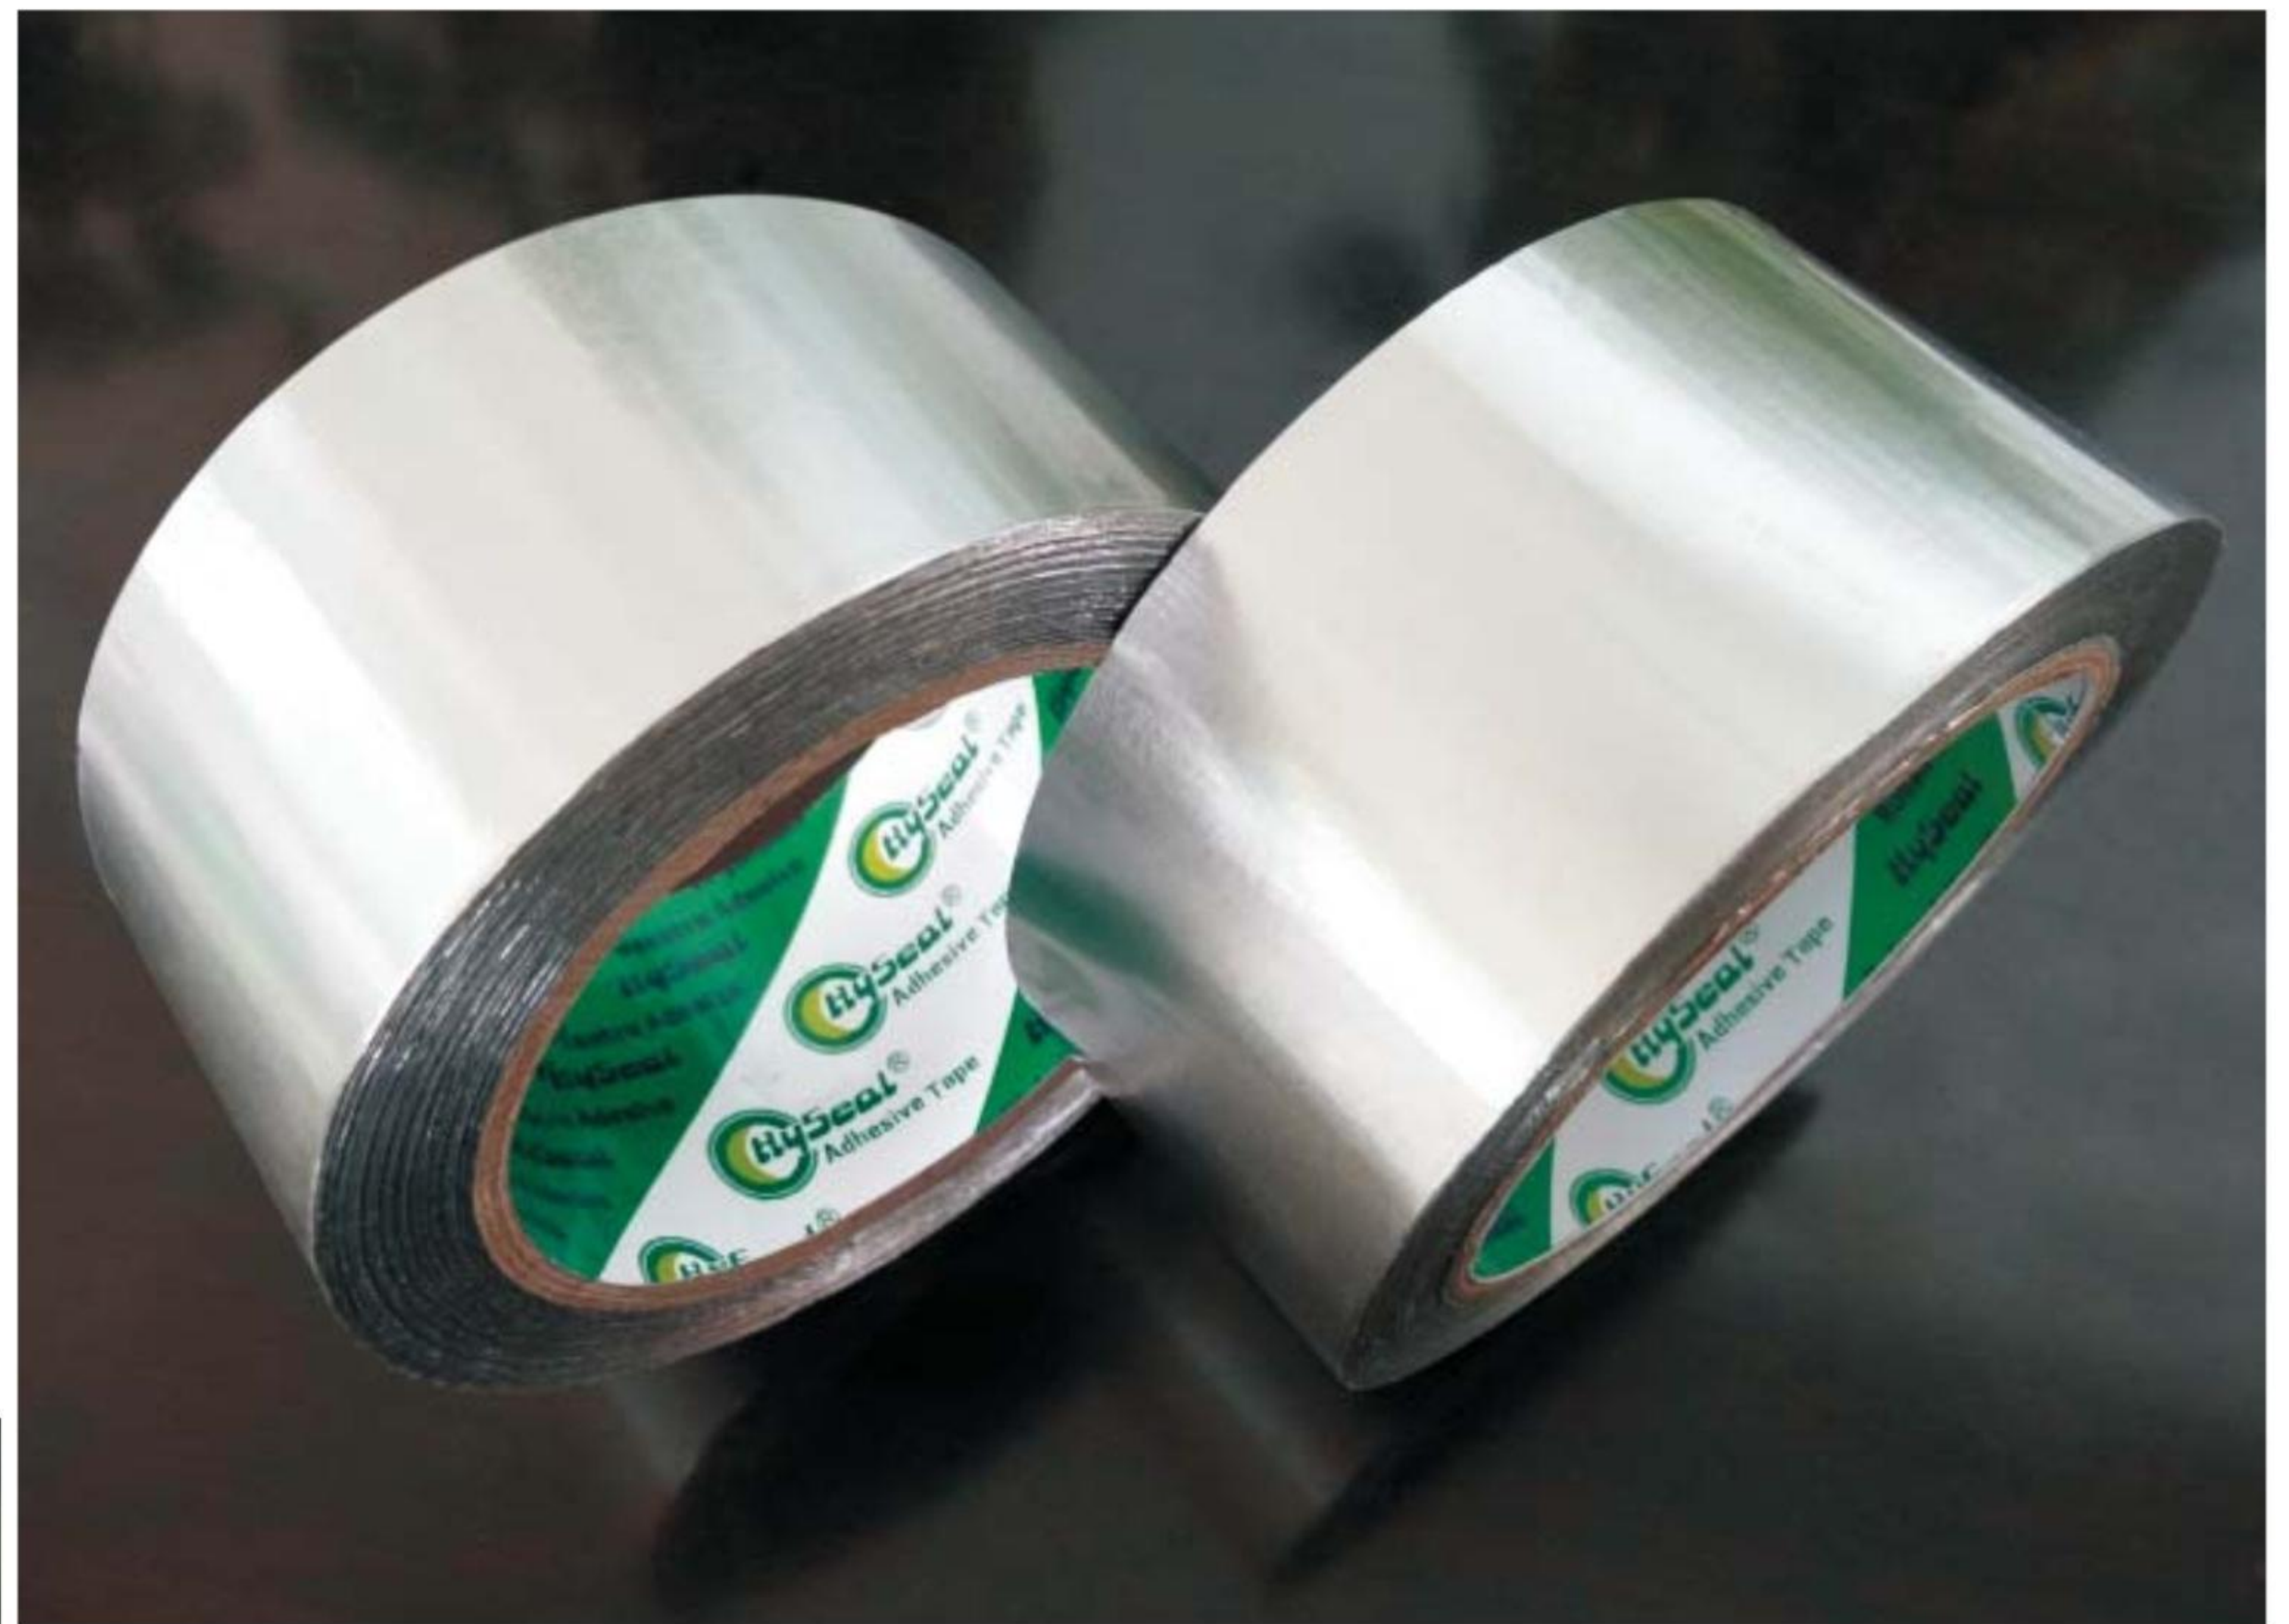

Reinforced Aluminium Foil Tape

- Low moisture vapor transmission rate
- Laminated with scrims
- Kraft paper liner
- Coated with solvent acrylic adhesive
- With release paper
- Various applications
- Eco-friendly

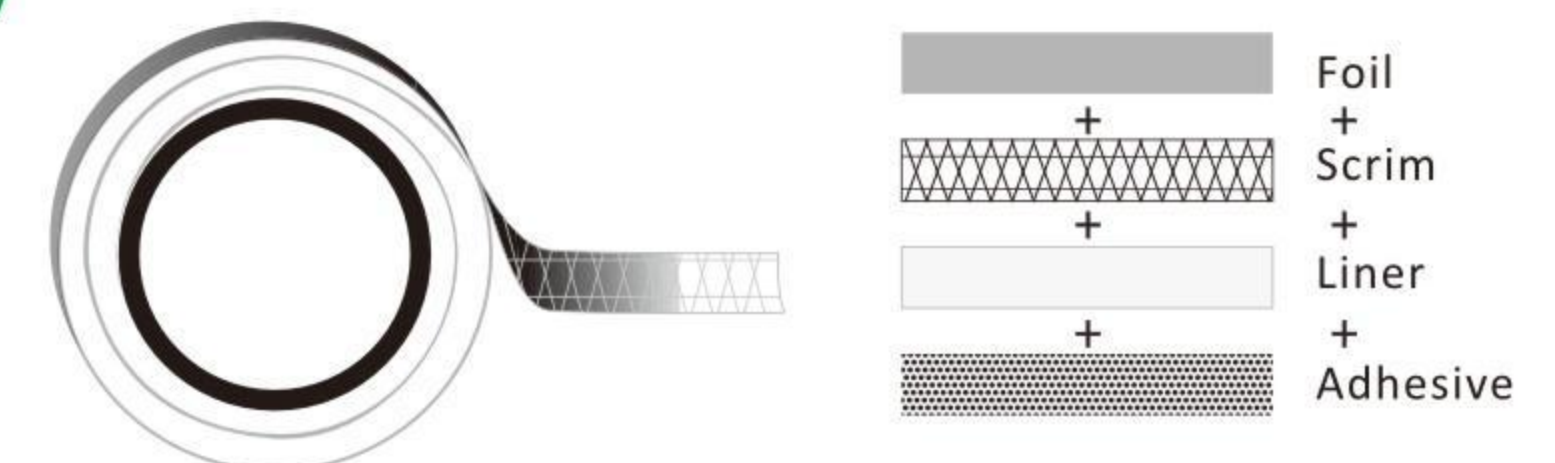

Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com

Paper Tape

Kraft Paper Tape ➡

The most frequently used for general purpose packaging. Coated with hot melt adhesive.



Reinforced Gum Tape ⬆

The tape is laminated with fiberglass, designed for heavy duty packaging. It has a high resistance to abrasion in transportation. Printed is available.



← Gum Tape

- Need water to activate
- High adhesion
- Strong tensile strength
- Long shelf life
- Free of pollution
- For special applications



Tel:+86 769 8130 0836

www.hyseal.com

Email:info@hyseal.com