



Polyester Strap

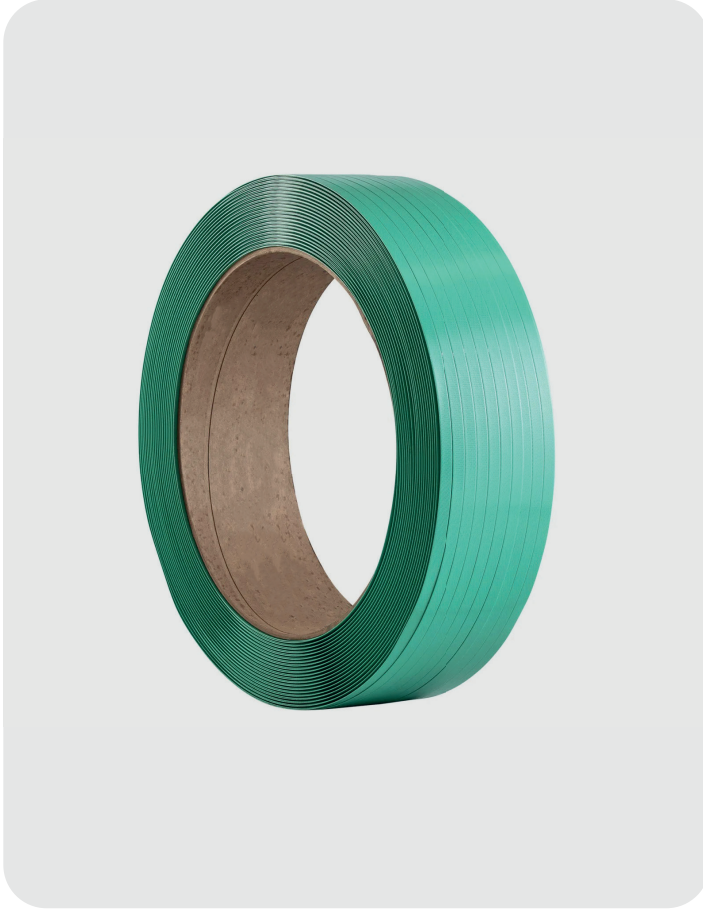

Polyester (PET) straps are the most rigid of the plastic strap types. Polyester (PET) straps, which can be used in light, medium and high strength applications, provide a good grip of loads that undergo contraction or expansion during transportation.




Width	Thickness	
Min: 9 mm. Max: 25 mm.	Min: 0,60 mm. Max: 1,27 mm.	Embossing / Smooth
Core		
400 mm. x 150 mm.	400 mm. x 160 mm.	400 mm. x 200 mm.

Polypropylene Strap



Polypropylene straps are especially useful in applications requiring elongation and strong connection points. It is generally preferred for light and medium strength application needs.



Width	Thickness	
Min: 5 mm. Max: 19 mm.	Min: 0,50 mm. Max: 0,90 mm.	Embossing
Manuel	First Quality	Original
Core		
200 mm. x 190 mm.	200 mm. x 150 mm.	400 mm. x 150 mm.

Composite Strap



Mescord manufactures high-strength Composite Strapping, also known as synthetic steel. All products offered for sale under the Mescord brand are manufactured using original raw materials.



Width

Min: 13 mm. Max: 32 mm.

Printed / Unprinted

Bronze

Silver

Gold

Platinum


Core

200 mm. x 190 mm.

Textile Strap (Hotmelt)



Mescord Hotmelt Straps are produced by means of special adhesive using high strength original polyester yarns as in composite straps.



Width			
Min: 13 mm. Max: 32 mm.		Printed / Unprinted	
Bronze	Silver	Gold	Platinum
Core			
70 mm. x 140 mm.			

Strapping **Dispensers**




It is used to carry the strap easily and to prevent the coils from falling apart. Thanks to its wheels, it provides ease of use during shipment from place to place. Thanks to the hopper on the Strapping Dispensers.




X	Y	Z
980 mm.	595 mm.	375 mm.

Semi-automatic Strapping Machine

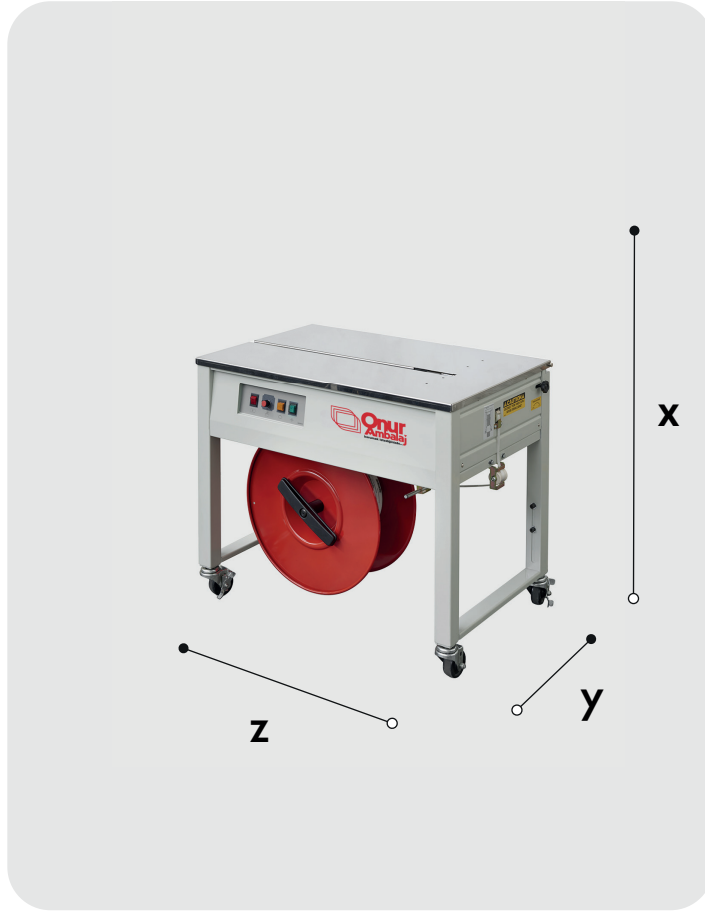


The machine automatically makes tensioning, gluing, cutting and preparing the new strap.

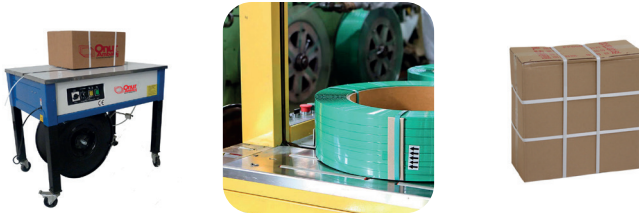

X	Y	Z
760 mm.	585 mm.	900 mm.


Manuel Strapping Machine

It is used in metal seal packaging of Polypropylene Straps.

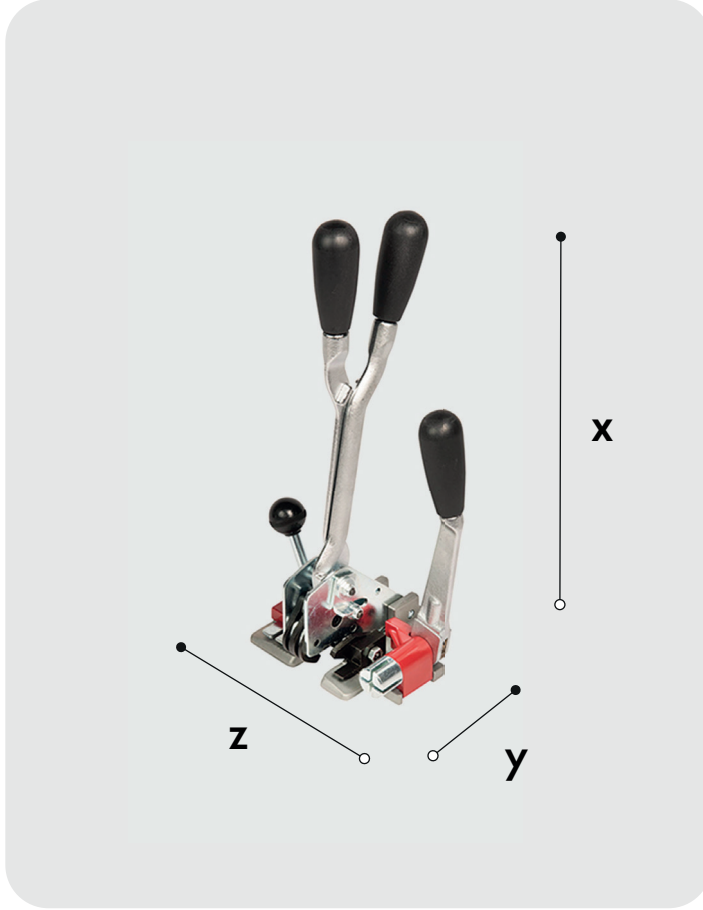

X	Y	Z
372 mm.	130 mm.	150 mm.

Manual Strap **Tensioning Apparatus**

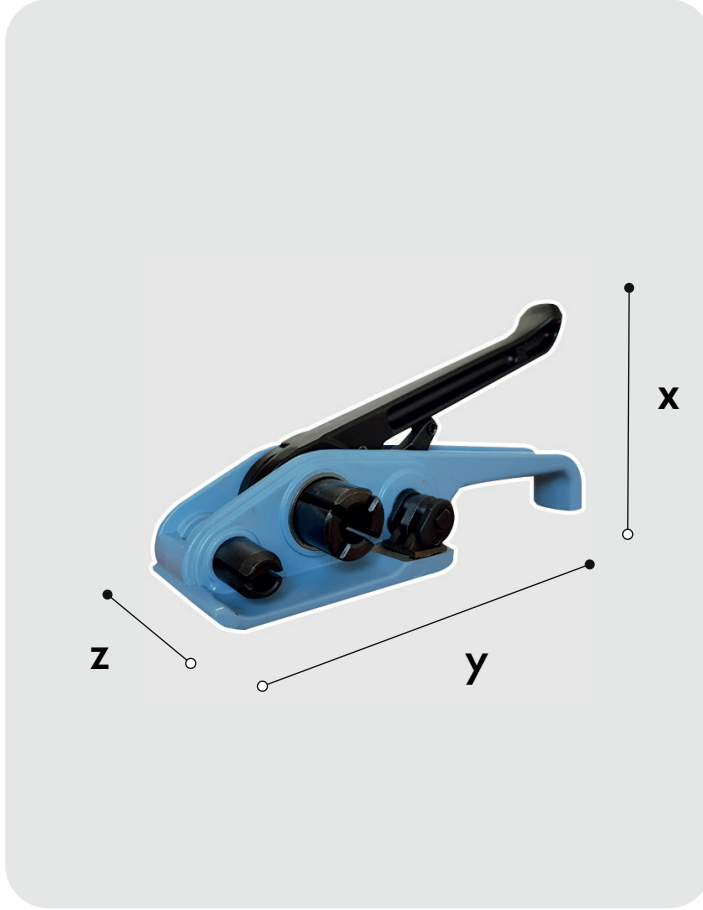

It is a tensioning tool used for polypropylene, polyester, and composite (fibrous) straps that are very easy to use.




X	Y	Z
150 mm.	260 mm.	70 mm.

Chrome Coated **Buckle**



Chrome coated buckles, also known as galvanized buckle; are used in the connection of Polyester Strap, Polypropylene Strap and Composite Fibre Strap. It makes the connection solid and secure.



Size	Quantity per Package	Package Weight
13 mm.	1000 Piece	7,2 - 8,5 kg.
16 mm.	1000 Piece	8,5 - 11 kg.
19 mm.	1000 Piece	11,4 - 22 kg.
25 mm.	500 Piece	13,5 - 21 kg.
32 mm.	250 Piece	16 - 21,6 kg.

Metal **Seal**




It is used for connecting polypropylene straps. There are 12-16 (mm) size options. The buckle manufactured as metal seal is used in polypropylene straps.




Size	Quantity per Package	Package Weight
12 mm.	1000 Piece	2.5 kg.
16 mm.	800 Piece	2.5 kg.

Plastic Edge Protector

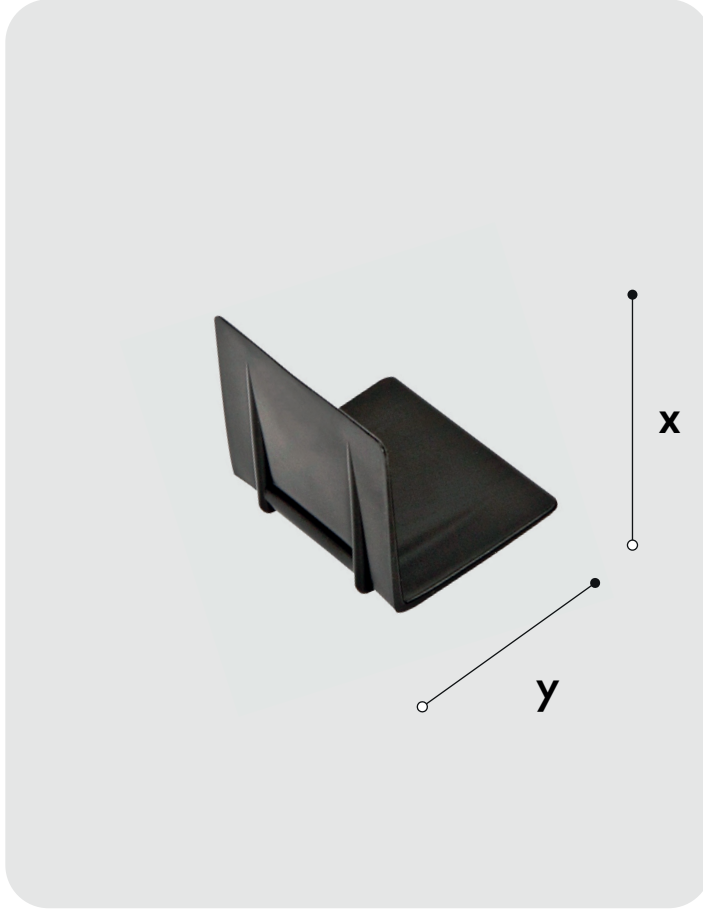


It is used between the product to be bound and the strap so as not to damage the product or the strap. It is not affected by sunlight and setting temperature, it does not break and does not rust.

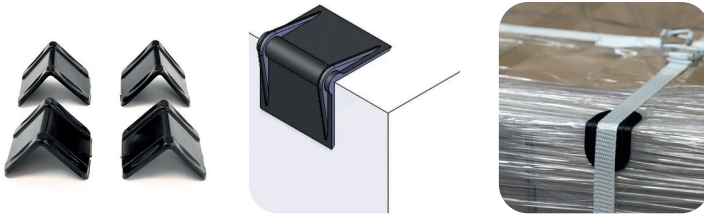


Size	Quantity per Package	Product Size
13-16-19 mm. (Mini)	1000 Piece	X: 25 mm. Y: 25 mm.
16-19 mm. (Midi)	2000 Piece	X: 40 mm. Y: 37 mm.
25-32 mm. (Maxi)	1500 Piece	X: 45 mm. Y: 50 mm.

Plastic Buckle

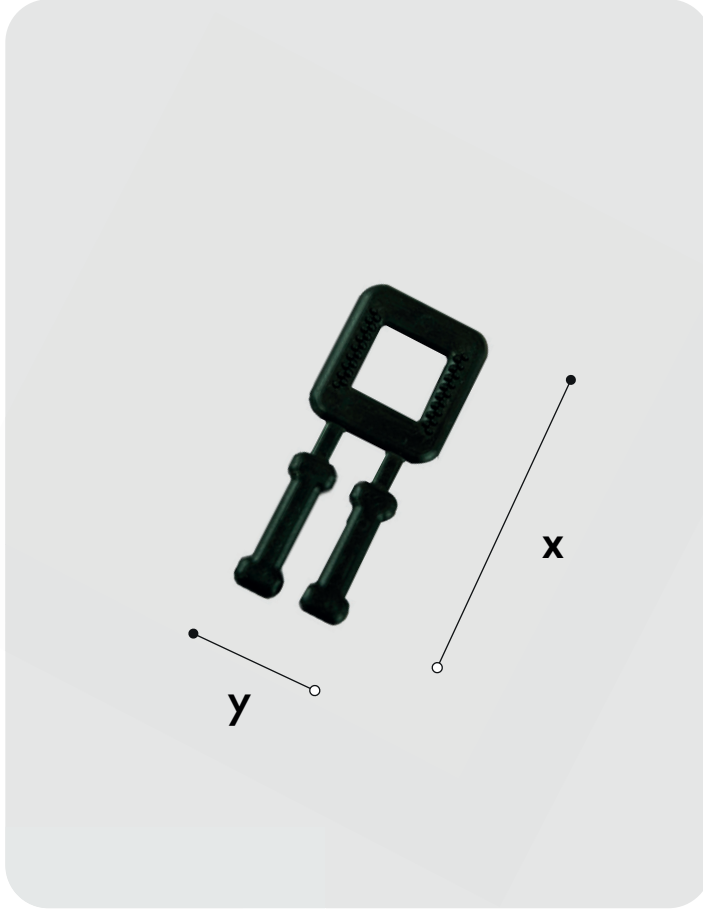

It is used for manual connection of polypropylene straps up to 12 mm wide. It is easy and practical to use.

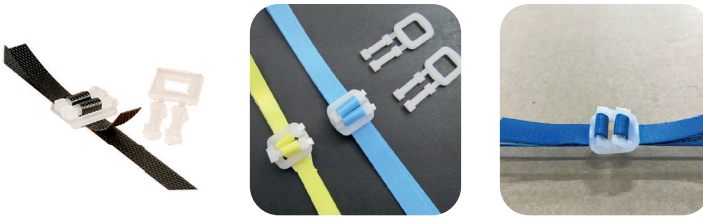

Color	Quantity per Package
Black	1000 Pieces
Transperant	1000 Pieces
X: 55 mm.	Y: 23 mm