


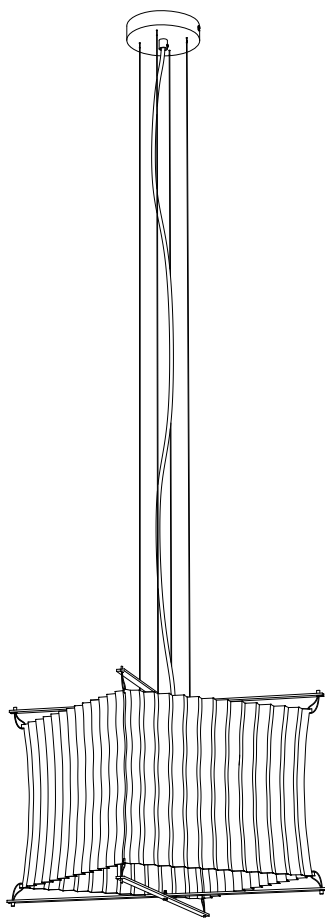
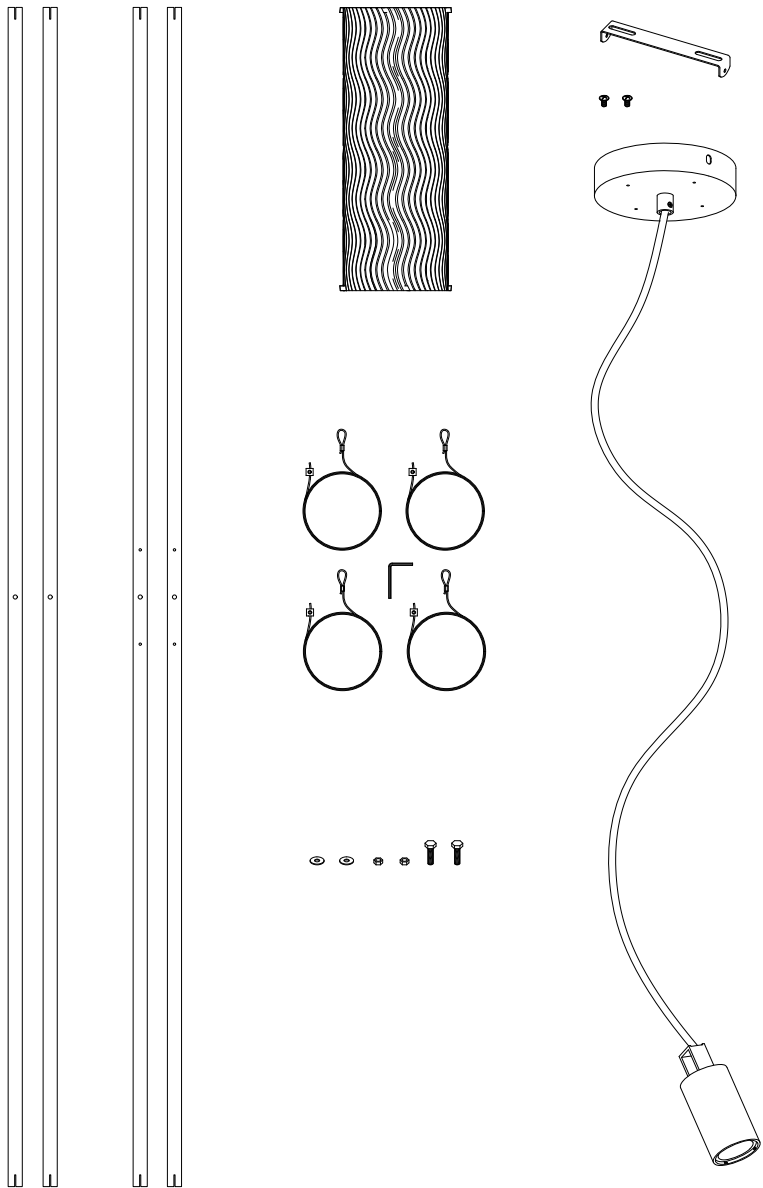


Pavilion 35
Installation Manual

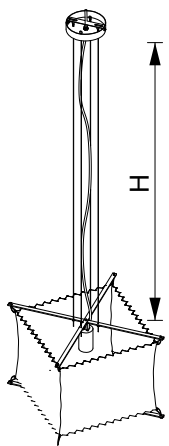



Pavilion Large
All Components



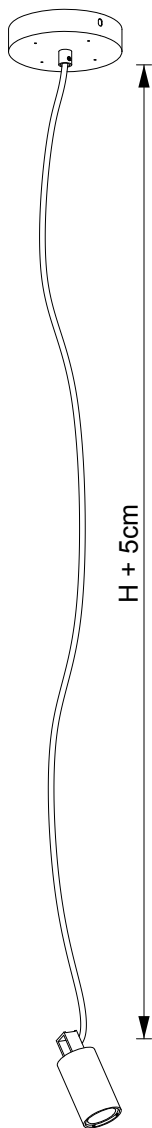


Determine the required installation height H for the Pavilion pendant lamp. Using a cross-head screwdriver, loosen the cable clamp screw inside the ceiling canopy. Adjust the length of the cable between the E27 socket and the metal canopy so that it is approximately $H + 5$ cm. Then retighten the screw to secure the cable firmly.

1

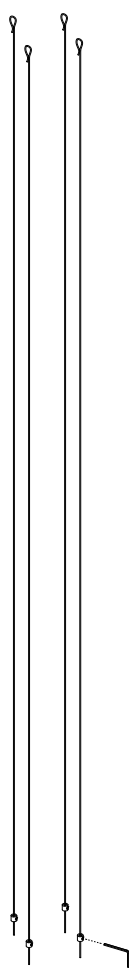

Remove the cable grippers from the four steel wires. Set them aside for use during later installation.

2

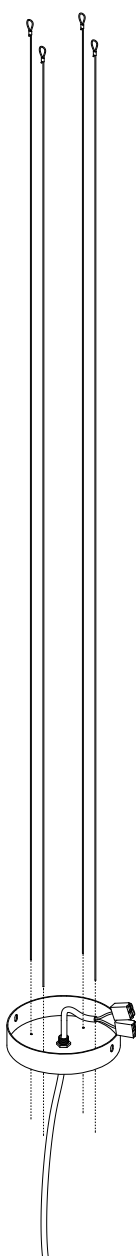


Thread the four steel wires through the holes in the metal ceiling canopy, one by one. Ensure that the end with the ferrule is positioned above the canopy.

3

Fix the mounting bracket to the ceiling surface.

Please select and prepare suitable wall plugs and screws according to the installation surface (e.g. concrete, solid wood, hollow wall, etc.).

Fixing screws are not included with this product to avoid improper installation or risk of falling due to incompatible materials.





4

Insert the ceiling power wires into the pre-installed terminal block of the lamp, matching the colors as follows:


- Brown → Live (L)
- Blue → Neutral (N)
- Yellow/green → Earth (PE)

After insertion, gently pull each wire to ensure it is securely fixed.

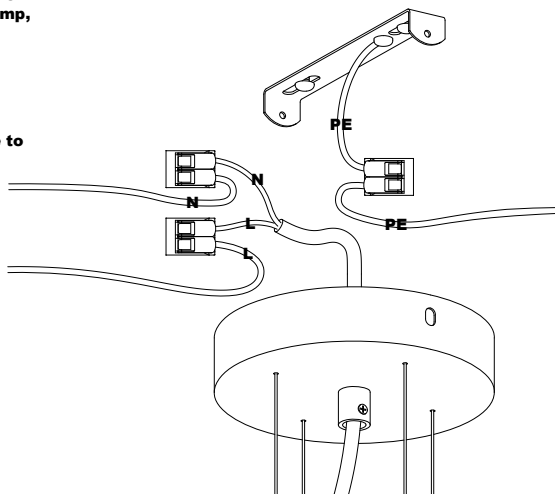


5


Place the ceiling canopy over the mounting bracket, then tighten the screws on both sides with a screwdriver to secure it.

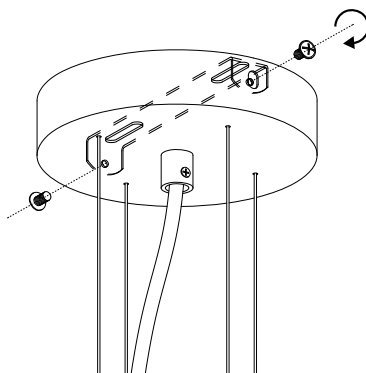


6

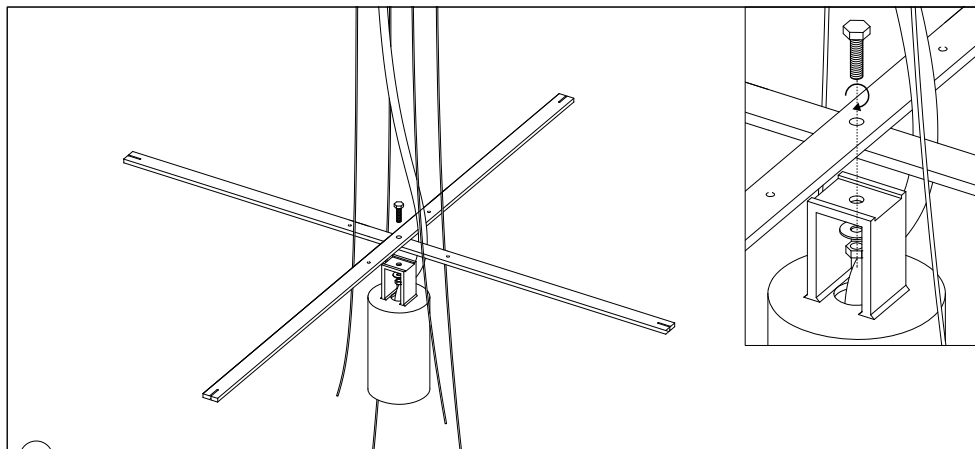

- 7** Use screws, nuts, and washers to fix the two steel bars (each with three holes) to the suspended lamp holder.

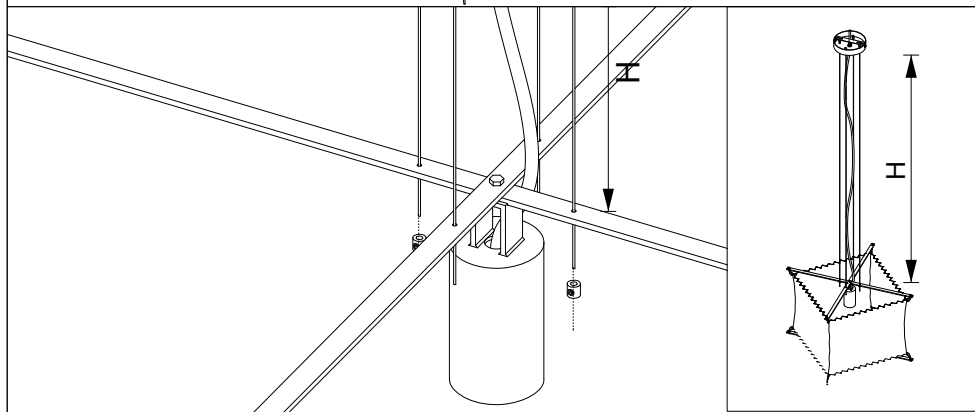


- 8** Thread the steel wire through the cable gripper, then adjust it to the height **H** (measured from the ceiling canopy to the bottom gripper).


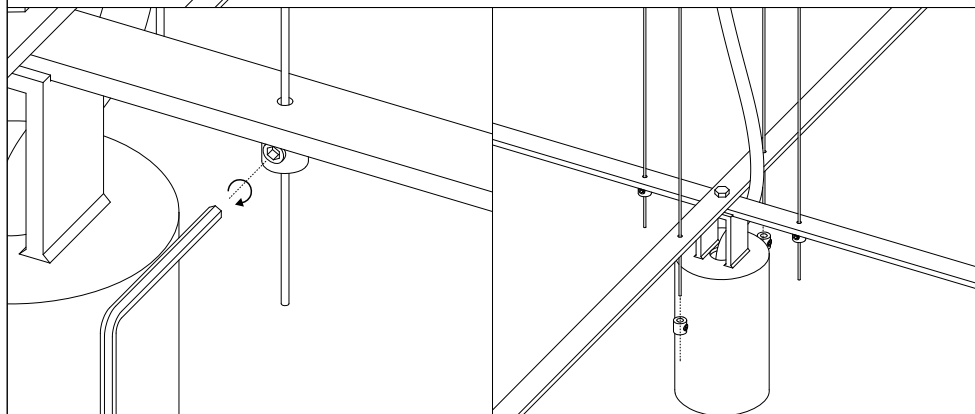


- 9** Tighten the cable gripper with an Allen key to secure the steel wire in place.


- 10** Install the other steel bar in the same way.

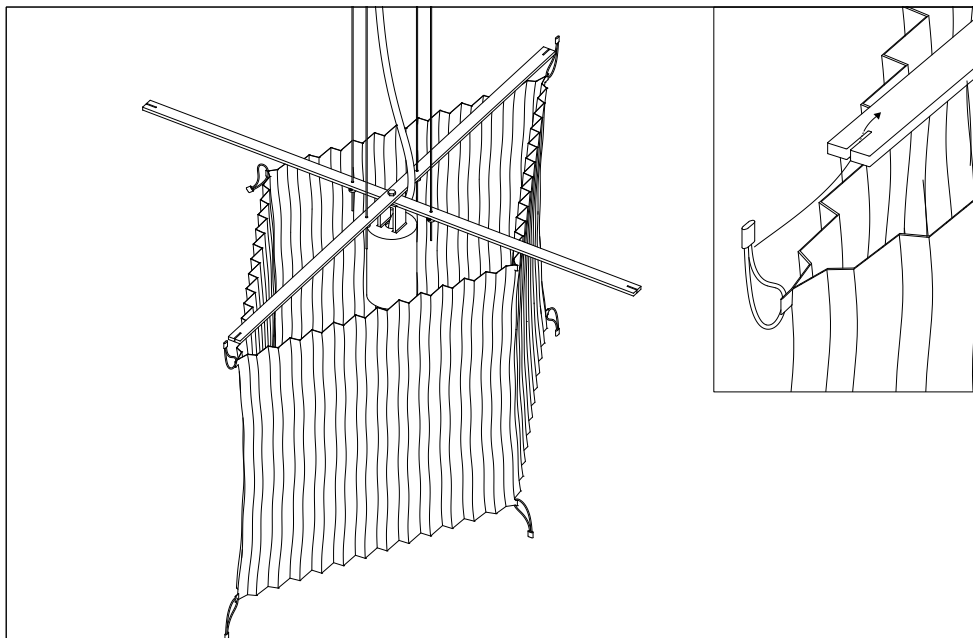



- 11** Pick up the lampshade and unfold it.
Place the two symmetrical loops on the lampshade onto the ends of the rods, ensuring they are securely attached.

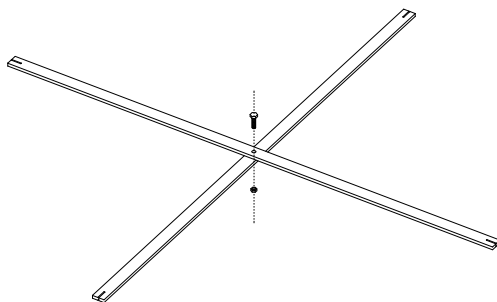


- 12** Secure the two steel bars (each with a single hole) together using a screw and nut.

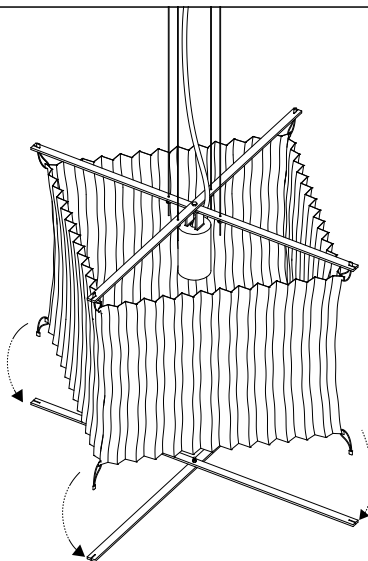

- 14** Attach the loop at the bottom of the lampshade to the assembled steel bars, ensuring it is securely fastened.

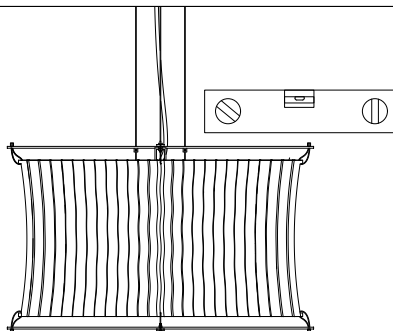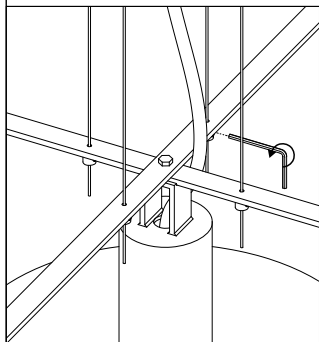

- 15** Adjust the position of the cable grippers on the steel wires to level the lamp.

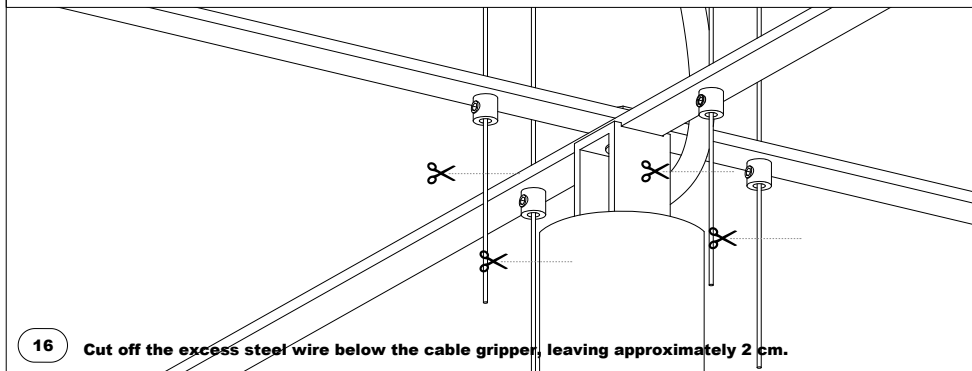

- 16** Cut off the excess steel wire below the cable gripper, leaving approximately 2 cm.