


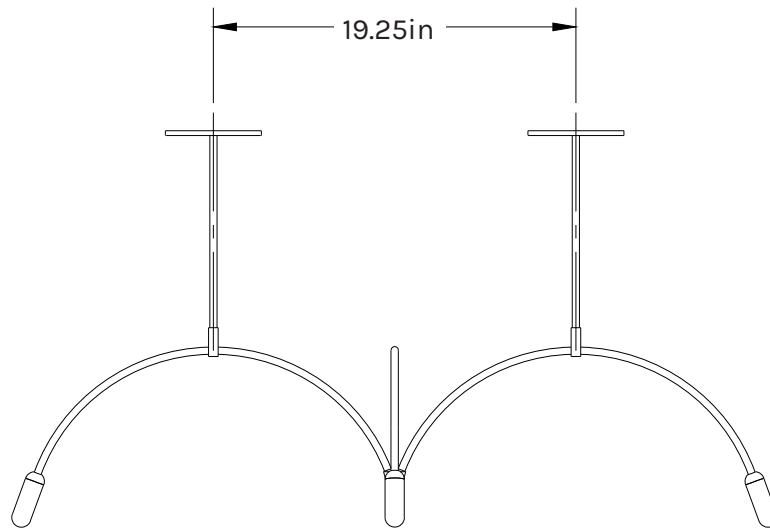

Vault Chandelier

Installation Instructions:

1. While chandelier is still wrapped in foam, thread suspension pipes (6) into rectangular connectors, feeding four wires through.
3. Thread small hang straights (4) onto ends of each pipe in the orientation shown on page 2.
4. Thread nipples (3) into top of hang straights. The shorter nipple goes on the non-power side.
5. Thread crossbars (2) onto nipples. The green screw goes on the power side. Thread hex nut (1) onto the nipple on power side.
4. Unthread knurled ring on hang-straights and carefully slip canopies (5) over suspension pipes to rest on the fixture
5. Raise chandelier by the suspension rods (a friend is helpful here!) and secure crossbars to the junction box and ceiling (screws not provided)
6. Connect two black wires to hot supply wire. Connect two white wires to neutral supply wire.
7. Unwrap chandelier, install G9 bulbs (they sometimes require a gentle wiggle to seat correctly) and glass diffusers (Note: install G9 bulbs while light is OFF) and test fixture lights up
8. Raise canopies and secure against ceiling with hang straight rings

CAUTION: ONLY USE WITH MAX. 4 WATT BULBS

