



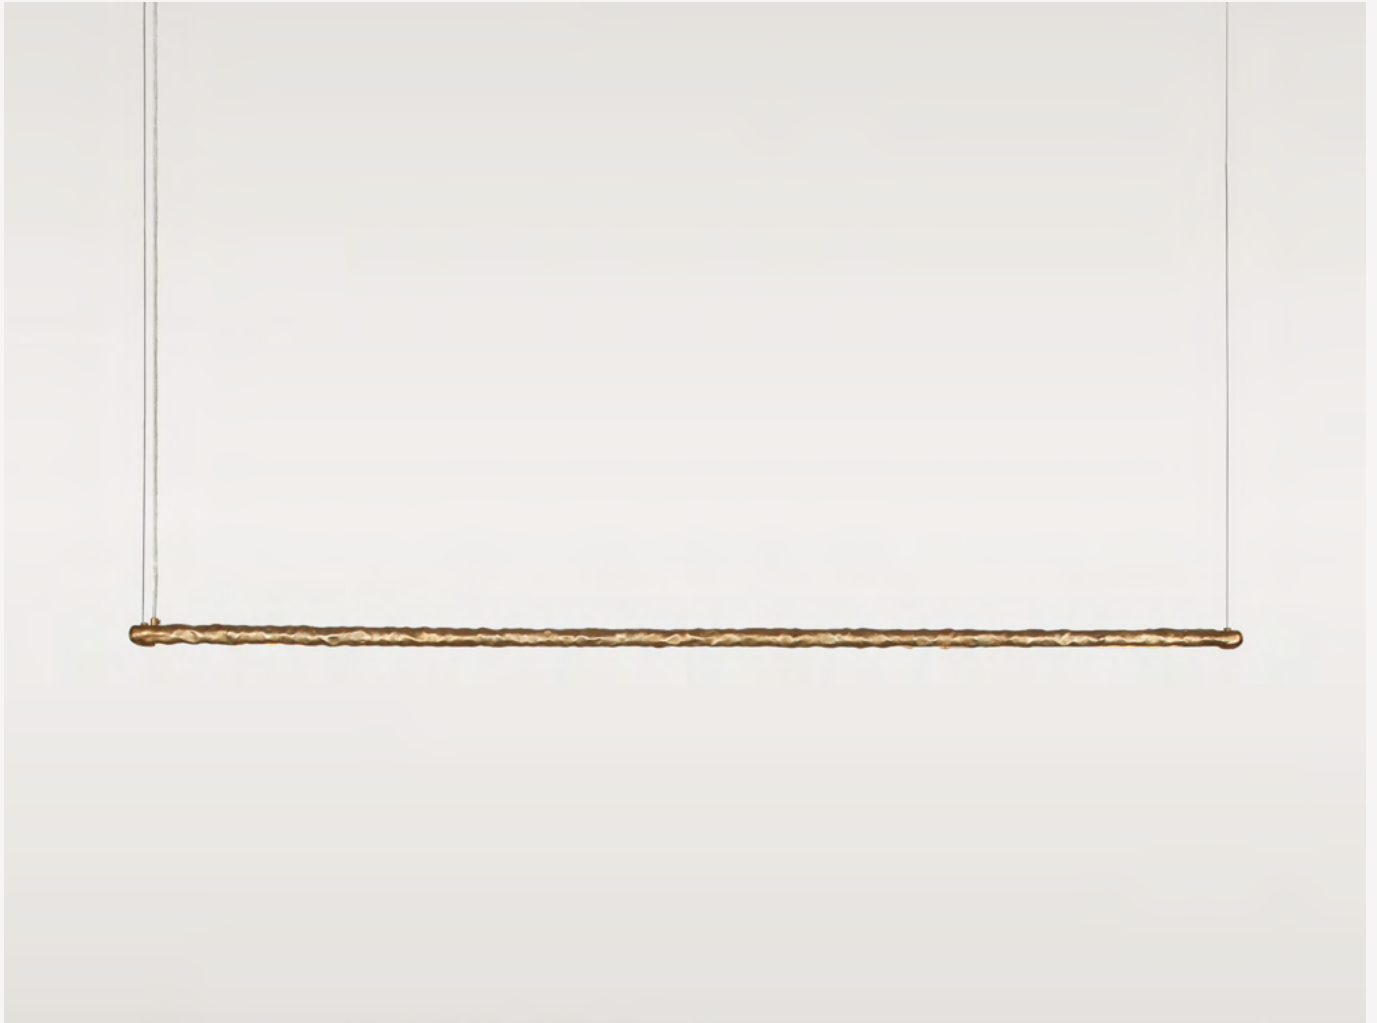

ARIA
LINEAR LIGHT
Specification Sheet

ARIA LINEAR LIGHT

SPECIFICATION SHEET

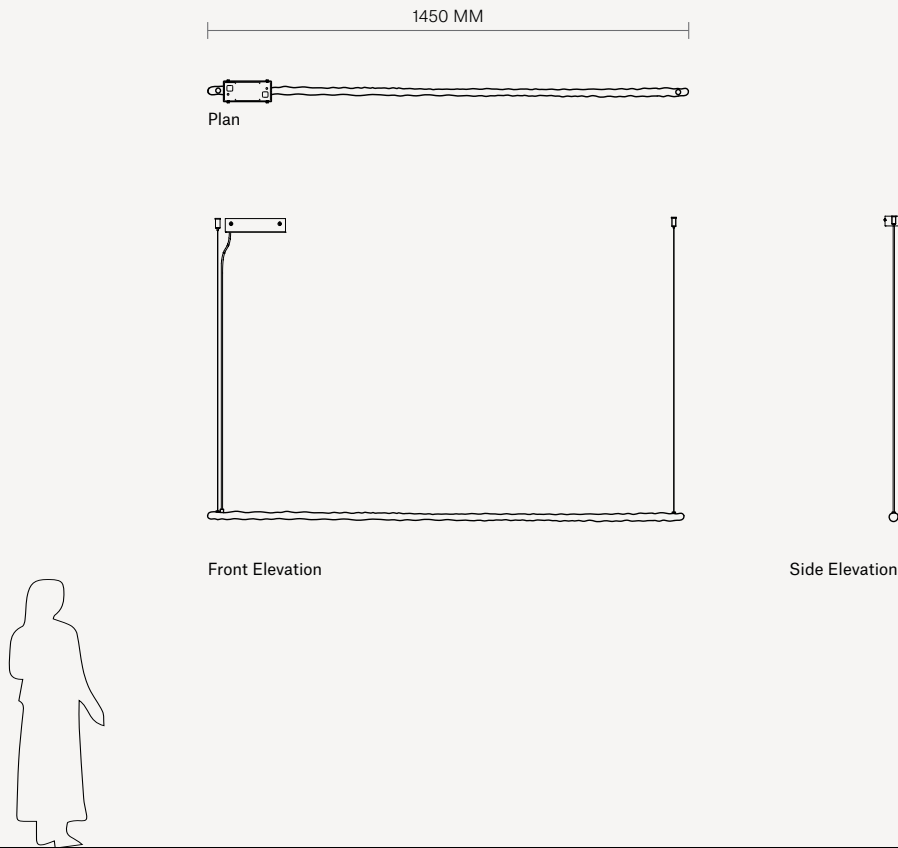

About Aria Linear

Aria Linear celebrates the inexplicable and beautiful quality of casting from hand-formed molds. It draws inspiration from the art of metal sand casting and sculpture-making, a method surpassed by modern techniques used for mass production. By honouring the inherent beauty found in imperfections, we challenge the notion of flawlessness. Each piece is carefully hand crafted, following a natural and organic process, resulting in a truly one-of-a-kind creation. Aria Linear is a testament to the craftsmanship of an experienced artisan who has dedicated years to honing their skills. It embodies the essence of their tireless efforts, unwavering dedication, and profound passion for their craft. The word 'Aria,' translating to 'air,' evokes a sense of freedom as metal effortlessly flows, capturing the intricate details of the human touch.

Care Instructions

Over time, the metal surface may diminish its original luster. To retain the original finish, use metal polish with a soft, dry cloth and gently rub it onto the surface. Do not use any abrasive substance on the product. Please be wary of the weight. Handle with care.

To know more, refer Installation Manual.

Technical Details

Dimensions

Dia.26 L1450 MM
Dia.1 L57 IN
(Custom length on request)

Weight


2.5 kg, 6 kg

Material and Finishes

Cast Aluminium,
Burnished



Cast Brass,
Burnished and waxed



Hardware

W56 H32 D140 MM
W2.2 H1.3 D5.5 IN
Aluminium, Brass finish

Light source

IND/ UK/ EU
LED (Incl.); 12W, 220-240V

US/ JPN

LED Strip & Driver (Not Incl.)
(Specifications available on request)

Kelvin Rating

3000K

Dimmable

Phase cut
DALI & TRIAC compatible

Lumen

1160lm

CRI (Ra)

81.3

Cord

Hardwire, length - 2000 MM

Classification

IP20

FAQS

Q1. Size Customisation

The standard fixture length is 1450 mm, with an LED length of 1350 mm. For size customisation, the Aria Linear is available in lengths ranging from 1000 mm to 1250 mm, with a fixed LED length of 900 mm.

Q2. Height of the fixture from the ceiling

As standard, the fixture is supplied with a 2-metre clutch wire. Upon request, a clutch wire of up to 5 metres can be provided.

Q3. Driver Installation

A canopy casing in a matching finish is provided and can be mounted on the ceiling. Alternatively, the driver can be concealed within the ceiling or at the electrical source, depending on site conditions. The driver measures W56 × D140 × H32 mm.

Q4. Dimming and Automation

The standard driver is phase-cut and TRIAC-compatible. A DALI-compatible driver can also be supplied upon request. We recommend consulting your lighting consultant beforehand to ensure compatibility with your system.