

stem.




ARIA
CEILING LIGHT
Specification Sheet

ARIA

CEILING LIGHT

SPECIFICATION SHEET

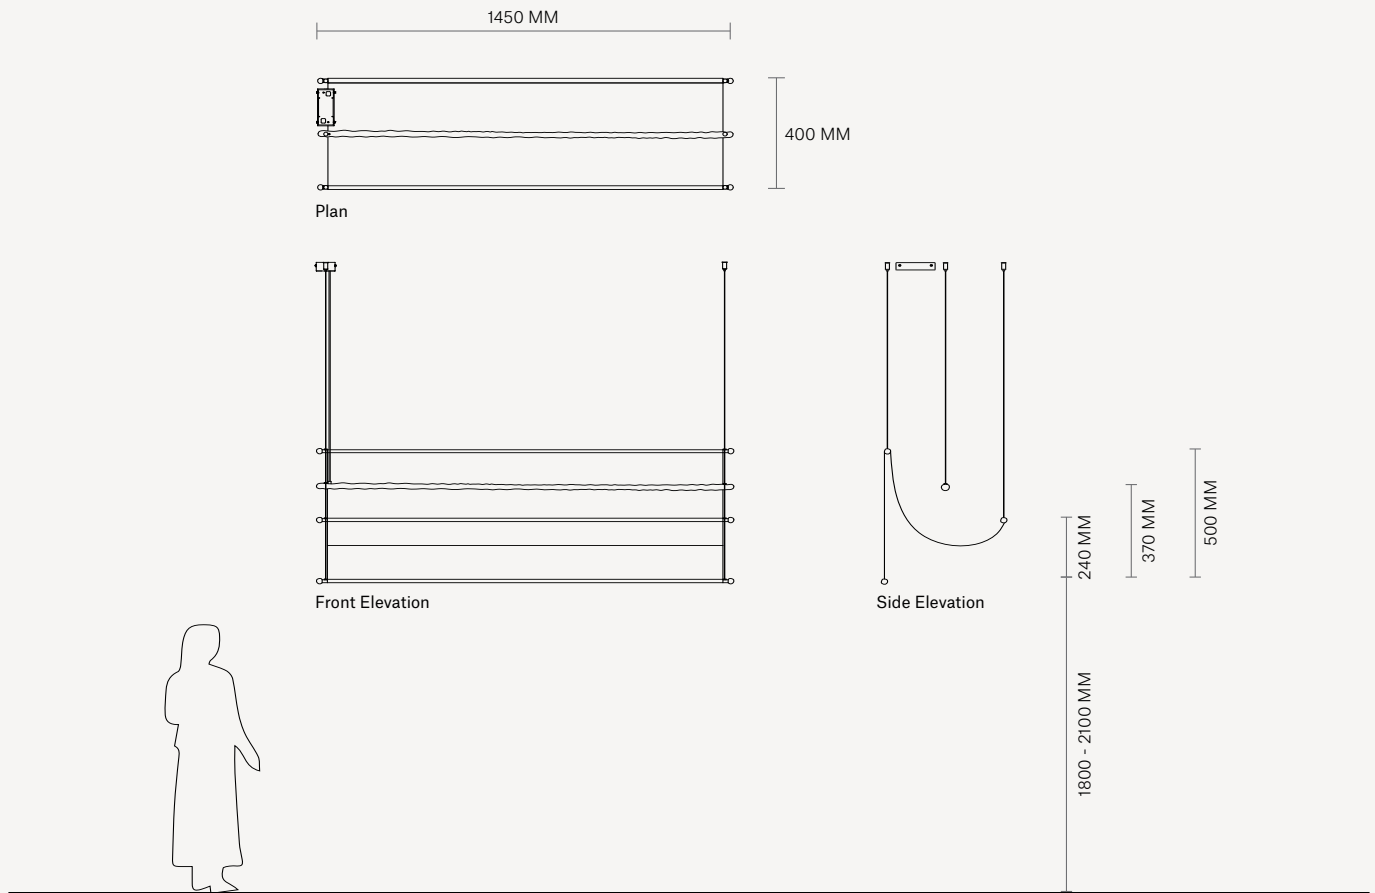

About Aria Ceiling

Aria draws inspiration from the gentle movements of a swaying cloth, dancing gracefully with the rhythm of the wind. It is a harmonious blend of two contrasting elements, brass, and linen, each showcasing their true essence with authenticity. The solid brass rods cast from hand-sculpted patterns retain the maker's touch and bear witness to the beauty of imperfection. The linen fabric is hand embroidered with delicate impressions borrowed from a child's sketch, stirring an emotional response, evoking a longing for life. Aria strikes a balance between art and function, blending high-quality materials with refined details, seamlessly weaving the art of being present.

Care Instructions

Over time, the metal surface may diminish its original luster. To retain the original finish, use metal polish with a soft, dry cloth and gently rub it onto the surface. Please be wary of the weight. Dry-clean the fabric and steam iron from both sides before re-installing. Do not wash the fabric at home or expose it to water. Handle with care to prevent damage or staining. Do not use any abrasive substance on the product.

To know more, refer Installation Manual.

Technical Details

Dimensions


W1450 H500 D400 MM
W57 H19.7 D15.7 IN

Weight


12 kg

Material and Finish

Cast Brass,
Burnished and waxed



Linen fabric,
Hand-embroidered



Hardware

W56 H32 D140 MM
W2.2 H1.3 D5.5 IN
Brass finish

Light source

IND/ UK/ EU
LED (Incl.)
12W, 220-240V

US/ JPN

LED Strip & Driver
(Not Incl.)
Specifications available
on request

Kelvin Rating

3000K

Dimmable

Phase cut
TRIAC compatible
DALI compatible

Cord

Hardwire
Cord length - 2000 MM

Classification

IP20

FAQS

Q1. Size Customisation

We do not offer size customization for this fixture.

Q2. Fabric Customisation

The fabric is hand-embroidered on linen, allowing for a diffused light output. We do not offer customisation or alternative fabric options. The fabric is removable and washable; kindly refer to the Care Manual for detailed instructions.

Q3. Height of the fixture from the ceiling

As standard, the fixture is supplied with a 2-metre clutch wire. Upon request, a clutch wire of up to 5 metres can be provided.

Q4. Driver Installation

A canopy casing in a matching finish is provided and can be mounted on the ceiling. Alternatively, the driver can be concealed within the ceiling or at the electrical source, depending on site conditions. The driver measures W56 × D140 × H32 mm.

Q5. Dimming and Automation

The standard driver is phase-cut and TRIAC-compatible. A DALI-compatible driver can also be supplied upon request. We recommend consulting your lighting consultant beforehand to ensure compatibility with your system.