

Coordinated Air-Ground Robot Swarms for Urban Disaster Response: Enhancing Resilience Through Collaborative Multi-Terrain Operations

Victor Lougon Sampaio Lopes

Instituto GayLussac, Niterói, Rio de Janeiro, Brazil

Abstract

Urban disasters like collapsing buildings, earthquakes, and explosions present major challenges when mapping the affected areas and looking for victims in the rubble. In recent years, the use of heterogeneous air-ground swarm robots has evolved into a promising approach due to their adaptability, scalability, and fault tolerance. This paper presents a comprehensive review of the use of such heterogeneous swarms, highlighting their ability to assist human responders through a synergistic combination of aerial surveying and close-range ground sensing. In doing so, this review traces the evolution of such techniques throughout early robotic deployments, such as in the World Trade Center collapse, to more modern swarm-based approaches. Furthermore, this paper outlines the foundational characteristics and advantages of swarm robots, with a focus on their potential benefits in search and rescue scenarios when integrating heterogeneous systems of drones and ground robots. Persistent challenges, such as communication issues, limited resources, and environmental noise, are also discussed. Finally, future prospects and possible solutions for improving autonomy, robustness, and scalability in air-ground robot swarms in search and rescue scenarios are reviewed. This paper aims to provide a foundation for improving swarm-enabled disaster response strategies, guiding future research and deployments to enhance performance in critical situations.

Keywords: swarm robotics, UAV-UGV coordination, disaster response, sensor fusion, autonomous systems

1. Introduction

Urban disasters, whether caused by human actions or natural events, often present complex challenges for rescuers and emergency responders, resulting in widespread destruction, ethical dilemmas, and significant numbers of injuries and

fatalities (Waykar, 2021). Therefore, the chaotic and unpredictable nature of disaster environments demands rapid response from public agencies and prompt action in healthcare and rescue efforts—areas that have historically been underdeveloped. In recent years, however, technological advancements have positioned robots as promising transformative tools in these scenarios (Murphy, 2012).

As a result of these emerging technologies, in disaster situations, robots offer considerable advantages relative to traditional human-only search and rescue teams. Robots present increased autonomy, scalability, and replaceability, characteristics that are essential in a rapidly changing, unexpected, and dangerous environment (Abraham et al., 2019). Initially, ground robots were used for victim detection and ground sensing in regions affected by the presence of large amounts of rubble. Then, drones were applied for mapping purposes. Following this evolution, recently, a swarm-based approach combining drones and ground robots was developed for use in these scenarios, representing substantial potential improvements in efficiency and performance (Chatziparaschis et al., 2020).

Given this recent development, swarm robots and their various applications have become an increasingly prominent topic. Swarm robots are defined as large groups of simplistic robots coordinated by environmental rules, acting as one collective agent to efficiently accomplish a certain given task (Navarro & Matía, 2013). Accordingly, these types of robots can be classified as homogeneous (all identical or very similar in terms of hardware, software, capabilities, and roles within the swarm) or heterogeneous (diverse agents with different capabilities and specialized roles), with the latter being the focus of this review.

Nonetheless, despite their increasing use, swarm robotic systems still present key operational limitations, such as quick-draining battery life, sensor malfunctions, and poor decision-making under irregular conditions (Şahin, 2005; Murphy, 2017). Additionally, swarm systems face numerous organizational and structural challenges, such as communication failures and inefficient task allocation (Brambilla et al., 2013). Therefore, while their benefits are evident, these constraints show that several improvements are required to ensure consistent performance during real-world operations.

Building on this foundation, this paper explores how heterogeneous aerial-ground robot swarms have contributed to search and rescue missions in urban zones, such as detecting victims and mapping collapsed buildings, and identifies potential developments to enhance their autonomy and reliability in disaster response. By analyzing the collaboration between these swarm systems, this paper hypothesizes that this integrated approach, promising albeit relatively underexplored, can significantly increase the speed, coverage, and effectiveness of rescue operations, potentially reducing casualties and enhancing recovery outcomes when compared to non-collaborative robotic systems. This review will synthesize findings across multiple studies to identify consistent performance benefits, key trade-offs in system design, and the most pressing gaps between research and real-world deployment.

In Section 2, the general principles, advantages, and applications of swarm robotics are discussed. Section 3 continues to present early robotic deployments in disaster scenarios and takeaways from their performance. The use of coordinated air-ground swarm robotics in search and rescue missions is stated in Section 4. The persistent challenges faced by these robots in disaster scenarios are described in Section 5. Next, Section 6 outlines future directions and opportunities of swarm-based air-ground systems. Lastly, in Section 7, the main ideas of this review are synthesized.

2. Swarm robotics: advantages and applications

This section presents the foundational principles, core advantages, and representative applications of swarm robotics to establish the base concepts and mechanisms that underlie swarm behavior. The specific and detailed application to heterogeneous aerial-ground systems will be developed in Section 4, where we apply these foundational ideas directly in the search and rescue context.

2.1. Principles of swarm intelligence

Swarm robotics is a subfield of collective robotics that applies principles of swarm intelligence, modeled after the behavior of social insects like ants and bees, to accomplish tasks that exceed the capabilities of individual robots. More specifically, it can be defined as the study of how collective intelligent behavior emerges from interactions both among individual agents and with their environment. These agents are typically simple in design and limited in capability when operating alone, but demonstrate efficiency when functioning as a group (Dorigo, 2005).

One of the defining features of swarm robotics is its reliance on decentralized control, where no single unit of the swarm dictates the behavior of the group, and instead every unit functions as a coordinated group by interacting with each other and the environment (Barca & Sekercioglu, 2013). In the context of disaster response, this principle directly supports resilience in communication-disrupted environments, allowing missions to continue even if part of the swarm loses connection. Additionally, this feature provides a particular resilience and scalability to the swarm, as units can be removed or added without interfering with the performance of the given task (Hu et al., 2018).

Closely tied to decentralization is the concept of redundancy, a critical feature responsible for the reliability of swarm robots. Specifically, redundancy refers to the system's ability to maintain task execution even when individual units fail (Christensen et al., 2009). During urban search-and-rescue missions, redundancy ensures operational continuity when robots are lost to rubble collapse or environmental hazards, a pattern repeatedly observed in field reports such as Murphy (2017). This characteristic is particularly valuable in dynamic and harsh environments, where failures are expected, and continuous operation is essential.

Another fundamental feature of swarm robotics is scalability. This property refers to the system's capacity to maintain effective performance regardless of the size of the swarm, largely enabled by its local communication and decentralized coordination (Bjerknes & Winfield, 2013). As a result, the system can easily adapt to meet the scale of the operation, increasing both the efficiency and the resilience of these swarms. For example, scaling up a robotic swarm from a small collapsed building to a city block requires only proportional adjustments to communication range and task assignment rather than a complete redesign, which demonstrates practical scalability.

Table 1 summarizes how these core principles correspond to operational advantages in search-and-rescue missions.



Table 1: Core swarm robotics principles and their operational roles in urban search and rescue missions

Principle	Operational role in search and rescue	Evidence type	Sources
Decentralization	Enables continued coordination despite signal loss	Field-tested (WTC, ICARUS)	Murphy, 2017; Hu et al., 2018
Redundancy	Maintains mission progress despite unit failure	Field-tested	Christensen et al., 2009; Murphy, 2017
Scalability	Adjusts team size to mission scale	Simulation-supported	Bjerknes & Winfield, 2013; Chatziparaschis et al., 2020

Note: Data adapted from Murphy, 2017; Hu et al., 2018; Christensen et al., 2009; Bjerknes & Winfield, 2013; Chatziparaschis et al., 2020.

2.2. Benefits of swarm robotics in dynamic environments

A key advantage of swarm robotics is grounded in its flexibility and resilience when operating in unpredictable and fast-changing scenarios (Bayındır, 2016). Specifically, due to this system's decentralized control and distributed decision-making, swarm robots can quickly adapt to environmental shifts such as blocked pathways, communication failures, or changing terrain. This allows them to maintain coordinated navigation and reliable task execution even under unpredictable disaster conditions (Khaldi & Cherif, 2015). This flexibility allows the swarm to reconfigure itself in real-time, adjusting its size, role, and trajectories to optimize results.

Furthermore, swarm robots display remarkable fault tolerance. Originating from its redundancy and local communication within the system, a swarm's fault-tolerance ensures the task is completed even when facing partial failures in the group (Winfield & Nembrini, 2006). This robustness makes robot swarms particularly suited for high-risk and unpredictable scenarios such as those seen in disaster zones, where timely response, adaptability, and continuity are essential for success.

2.3. Relevance to search and rescue contexts

Such missions are often characterized by their uncertainty, time-sensitivity, and instability. According to research, survival chances for trapped victims are highest within the first 24–48 hours but start to decline thereafter, often dropping below 20% after 72 hours (see Figure 1) (Zhang et al., 2018).

Similarly, urban disasters, such as collapsing buildings, earthquakes, explosions, floods, and structural fires, give rise to unpredictable and fast-changing environments, unsuited for conventional rescue techniques (see Figure 2). Therefore, robustness and flexibility are essential in these situations, as rescue efforts must continue despite any encountered obstacles (Waykar, 2021).

In relation to that, swarm robotics strongly aligns with the demands of search and rescue missions due to its inherent characteristics. Specifically, their redundancy and decentralized control make them highly robust in scenarios where units of

the system can fail. Moreover, their autonomy and scalability enable them to rapidly adapt to fast-changing conditions and maintain their operation even in large and complex environments (Moosavi et al., 2024; Waykar, 2021).

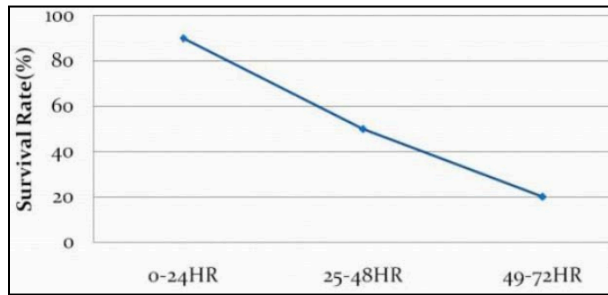


Figure 1: Statistics of rescue time and survival rate

Note: Survival rate declines as time after the event increases, emphasizing the importance of rapid response. Adapted from Hakami, A., Kumar, A., Shim, S. J., & Nahleh, Y. A. (2013). *Application of soft systems methodology in solving disaster emergency logistics problems*. Open access.

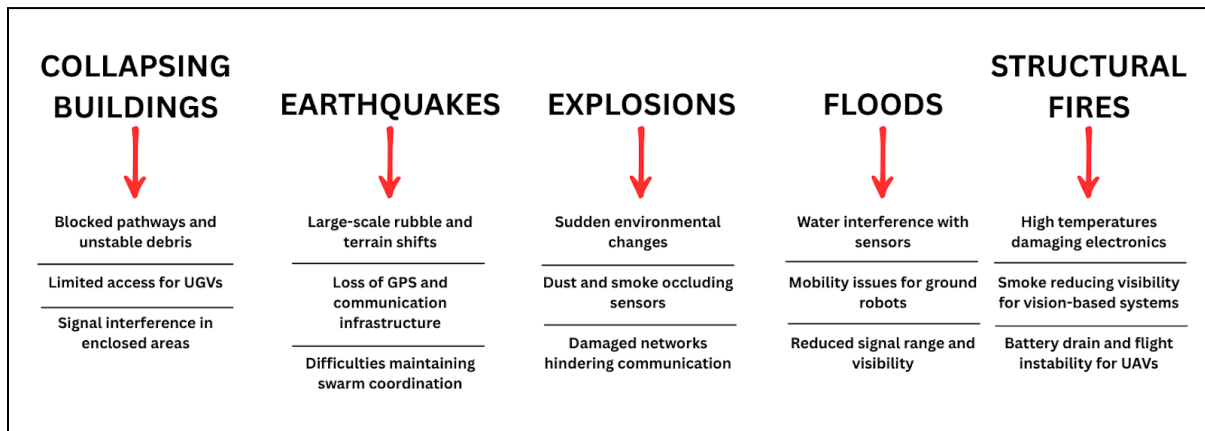


Figure 2: Urban disasters and their associated challenges

Note: This schematic summarizes common urban disasters (collapsing buildings, earthquakes, explosions, floods, and structural fires) and the main operational and environmental challenges they present. Own work.

Furthermore, these systems can, through collaboration, aid in the exploration of inaccessible or high-risk areas (in the detection of victims and mapping of the affected zones), demonstrating substantially greater efficiency compared to conventional monitoring systems, making them remarkably suited for such missions. The primary trade-off for these benefits is the increased complexity in coordination and control. However, given the time-critical nature of rescue missions and the high risk of unit loss, the swarm's resilience and scalability present a compelling advantage over more fragile, complex single-robot systems. Therefore, the theoretical foundation of swarm robotics aligns precisely with the practical demands of urban search and rescue.

3. Early robotic deployments and lessons learned

3.1. Case studies in search and rescue robotics

In the aftermath of the World Trade Center Collapse in 2001, ground robots were deployed in real urban disaster conditions for the first time. In this context, these robots were tasked with searching through the debris, analyzing the structural integrity of the collapsed buildings, and helping human responders locate victims. Moreover, these systems were equipped with cameras and thermal sensors, which were essential for search in confined, inaccessible, and hazardous areas (Casper & Murphy, 2003). Ultimately, this experience established the foundations for further deployments in many other disaster scenarios, as discussed below.

At the La Conchita, California, mudslide, ground robots (Inuktun VGTV Xtreme) were launched into the debris to track missing residents. In doing so, they found significant mobility issues due to terrain instability caused by the mud (Murphy, 2008). Moreover, at the Midas Gold Mine collapse in Nevada, a ground robot (an updated Inuktun VGTV Xtreme) was deployed to search for a missing miner (see Figure 3). However, the robot was unable to locate the body because of its insufficient lighting (Murphy, 2012). Furthermore, at Florida's Berkman Plaza collapse, a ground robot (Inuktun VGTV) was deployed to help locate a missing worker. However, the robot failed in locating the victim independently due to communication and locomotion issues caused by the collapsed environment (Murphy, 2012).

Together, these deployments show the potential and limitations of robots in search and rescue scenarios. The specific challenges synthesized in Table 2 demonstrate the need for enhanced locomotion systems, more adaptable modules, and resilient communication to support successful operations in these environments.

3.2. Environmental obstacles and limitations of early ground robots

Despite their innovative use, many limitations were observed when operating in the World Trade Center's remains. This and other deployments showed high failure rates, presenting a mean time between failures (MTBF) of approximately 24 hours and an availability rate of about 54% (Carlson et al., 2004). Regarding that, most of the deployed ground robots presented short operational lifespans due to the extreme conditions, which compromised their functionality. Moreover, these systems also faced communication difficulties, reducing their effectiveness in this scenario (Murphy, 2010). Consequently, their deployment demonstrated the need for improvements in robustness and autonomy to enhance robotic capabilities in such disaster environments.



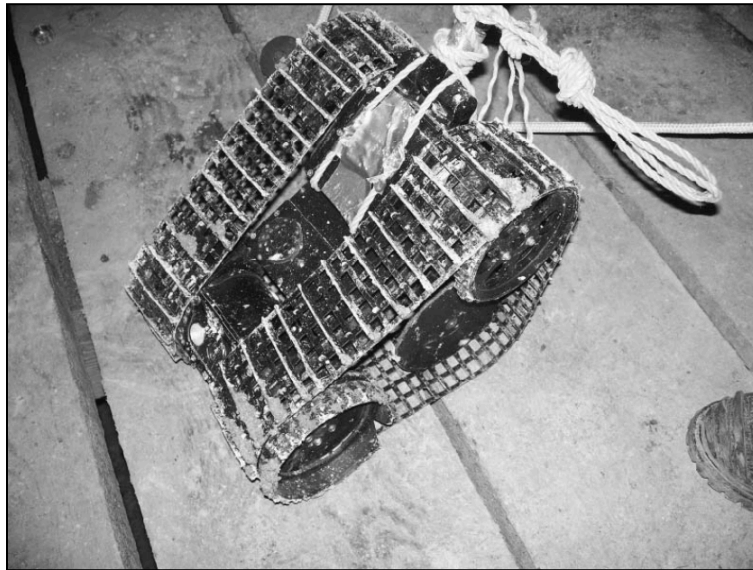


Figure 3: The Inuktun Extreme robot in the Midas Gold Mine rescue operation

Note: This figure shows the Inuktun Extreme robot used in the Midas Gold Mine incident to navigate debris and assist rescuers in the confined underground areas. From “Navigational and Mission Usability in Rescue Robots” by R. R. Murphy, 2010, *Journal of the Robotics Society of Japan*, 28(2), 142–146. Open access.

Table 2: Synthesis of challenges in early ground robot deployments

Deployment scenario	Robot Model	Primary Challenge	Outcome/Impact
World Trade Center (2001)	Various (multiple)	Communication difficulties, extreme environmental conditions	Limited effectiveness; established proof-of-concept but high failure rate
La Conchita Mudslide (2005)	Inuktun VGTV Xtreme	Mobility in unstable, muddy terrain	Severely hampered operations; robot could not traverse key areas
Midas Gold Mine Collapse	Inuktun VGTV Xtreme	Insufficient sensor capability (lighting)	Failed task; unable to locate victim due to poor visibility
Berkman Plaza Collapse	Inuktun VGTV	Locomotion and communication in dense rubble	Failed task; could not reach victim, highlighting terrain limitations

Note: Data adapted from Murphy, 2008; Murphy, 2012.

Many hardware characteristics contributed to these limitations. In this regard, many deployed ground robots faced size-related challenges: they were either too big to fit through tight spaces or too small to carry the necessary equipment. Moreover, several of them lacked the appropriate structural design required for traversing in unstable terrain, which prevented them from further operating in the disaster scenarios. Additionally, sensors and cameras also struggled when functioning in low-light or obscured areas (Carlson & Murphy, 2005).

Environmental factors must also be considered. In disaster areas, sharp and irregular debris can damage or trap the robots and equipment; suspended dust can obstruct visibility and impair sensor functionality; thick concrete and rebar within the rubble can hinder communication and navigation signals (Tong et al., 2024). Furthermore, high temperatures, moisture, and chemical leaks can degrade hardware and cause malfunctions in the system (Singh et al., 2015).

Collectively, these factors reveal that early ground robots, despite their pioneering use, were highly limited in terms of robustness, autonomy, and efficiency, underscoring the importance of new solutions and designs to increase their performance in disaster responses. The pattern of failure across these cases revealed the fundamental vulnerability of the single-robot, ground-only model, providing a clear rationale for the transition towards heterogeneous, multi-robot systems.

3.3. Lessons learned and their influence

These insights culminated in the formalization of disaster robotics as an actual subfield within robotics research. In this context, disaster response came to be recognized as a significant and coherent research area, supported by governments and scientific communities. Consequently, academic labs, public institutions, and independent researchers started working together to develop new designs and technologies that could mitigate the limitations of previous deployments.

Building on these foundations, coordinated aerial-ground swarm robotics has emerged as a promising approach, offering increased adaptability, scalability, autonomy, robustness, and efficiency in complex disaster response scenarios.

4. Coordinated aerial-ground swarm robotics in disaster response

4.1. Functions of UAVs and UGVs

Unmanned Aerial Vehicles (UAVs) play an important role in disaster scenarios, as they can quickly obtain essential information about the area's circumstances. Specifically, these drones can cover wide areas in real-time, supporting guidance and rescue through the mapping of the affected zone, the detection of areas with the highest likelihood of finding survivors, and the transport of medical supplies (Munasinghe et al., 2024). Moreover, they can also act by extending communication coverage, maintaining connections between different technologies or human teams, even throughout scattered locations (Li et al., 2021).

In contrast, Unmanned Ground Vehicles (UGVs) in disaster scenarios can navigate in inaccessible and high-risk areas, perform close-up, detailed inspections, and assist in victim detection and interaction (Munasinghe et al., 2024). Furthermore, as these robots are deployed directly into the collapsed zones and can be equipped with manipulation tools, they can interact with the environment by clearing paths and removing obstacles (Berns et al., 2017). As a result, they facilitate more efficient

and effective rescue operations.

A summary of the complementary functions of UAVs and UGVs is shown in Figure 4.

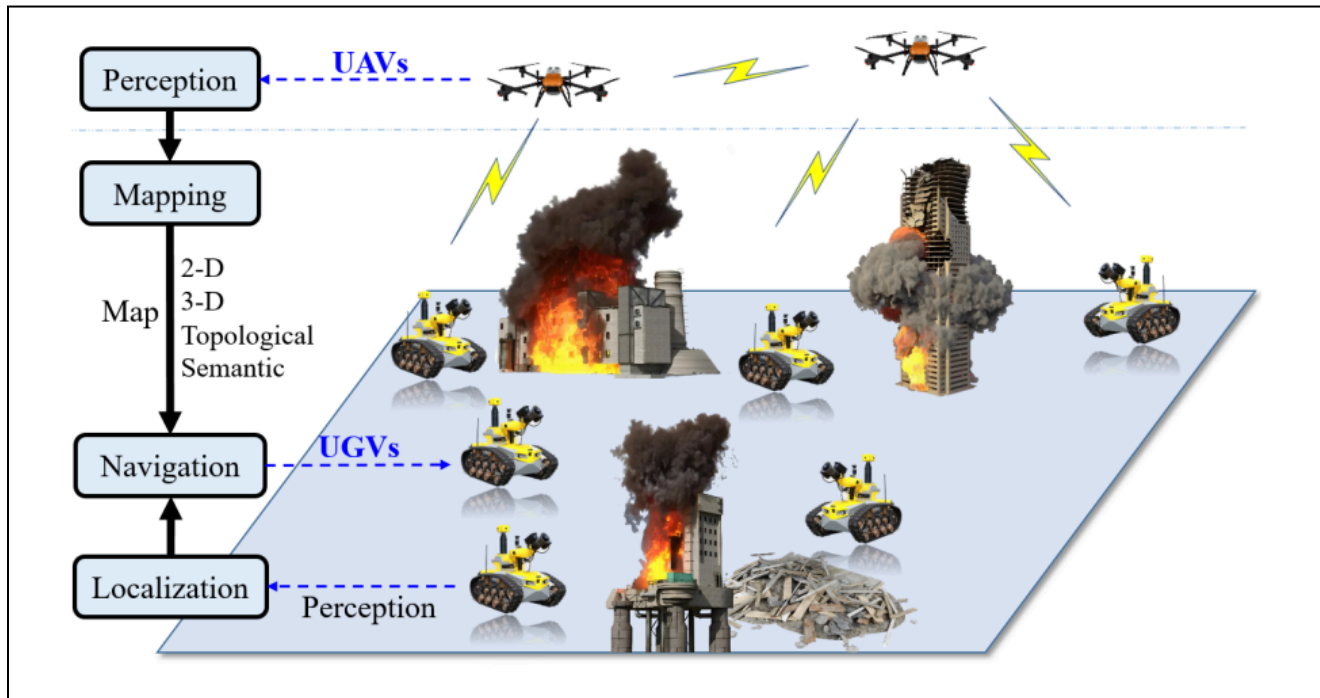


Figure 4: Fundamental Roles of UAVs and UGVs in Search and Rescue Missions

Note: This figure illustrates the key roles of UAV-UGV collaboration. From “Air-Ground Collaborative Robots for Fire and Rescue Missions: Towards Mapping and Navigation Perspective” by Y. Zhang, H. Yan, D. Zhu, J. Wang, C.-H. Zhang, W. Ding, X. Luo, C. Hua, and M. Q.-H. Meng, 2025, arXiv. Open access.

Building on these complementary strengths, the next subsection will explore the underdiscussed but promising coordination between aerial and ground robots through a swarm-based approach.

4.2. Swarm-based coordination of air-ground robots

The coordination of air-ground robots in disaster scenarios comes with numerous benefits, as illustrated in Figure 5. In these scenarios, UAVs can provide real-time overview data to inform and guide the UGVs' navigation along the safest and most convenient routes. Expanding on that, while drones perform the mapping from above (identifying structural instabilities, survivor hotspots, and areas to avoid), ground robots can use this information to support on-site activities, such as accessing voids, removing obstacles for human rescuers, or delivering medical aid to victims (Munasinghe et al., 2024). These complementary roles, in a complex and unpredictable environment, not only effectively allocate tasks in a systematic manner,

but also enable more efficient coverage and faster response times (Queralta et al., 2020). Therefore, by integrating their individual specialties and capabilities, this collaboration can achieve enhanced autonomy, flexibility, and reliability compared with independent operation (see Table 3), such as in the World Trade Center rescue operation.

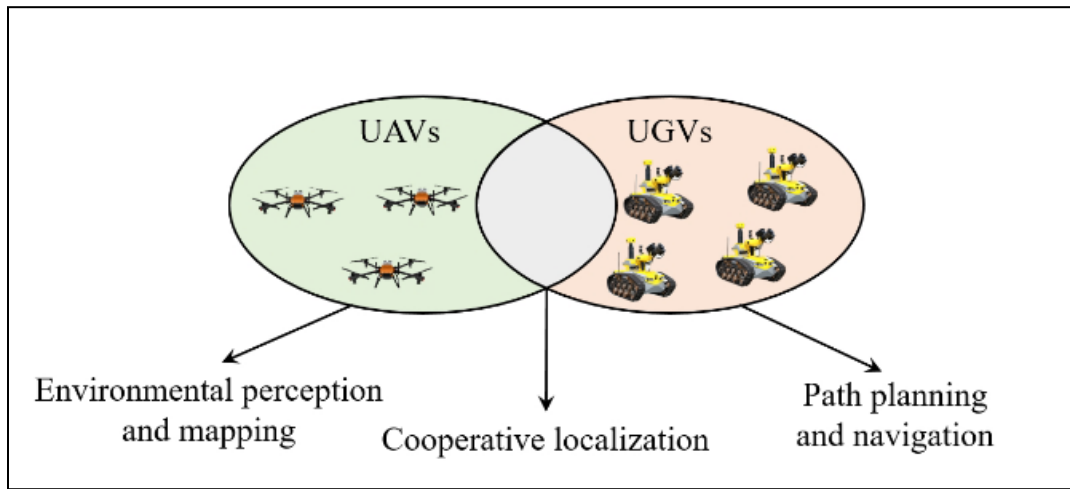


Figure 5: Key collaborative functions between UAVs and UGVs in disaster response scenarios

Note: This figure outlines the core areas of cooperation between UAVs and UGVs. From “Air-Ground Collaborative Robots for Fire and Rescue Missions: Towards Mapping and Navigation Perspective” by Zhang et al., 2025, arXiv. Open access.

<https://doi.org/10.48550/arXiv.2412.20699>

Table 3: Performance metrics for coordinated vs. non-coordinated systems in search-and-rescue simulations

Metric	Non-Coordinated	Heterogeneous UAV-UGV	Improvement	Source
Mission time	100.0 min	26.7 min	-73.3%	Chen et al., 2025
Task completion rate (TCR)	Baseline (varies)	+18.42% TCR over baseline	+18.42%	Lu et al., 2025
Localization error (GNSS-denied)	1.17 m median error	0.10 m median error	-91.5%	Sivaneri & Gross, 2017

Note: TCR = Task Completion Rate; GNSS = Global Navigation Satellite System. Data adapted from Chen et al., 2025; Lu et al., 2025; Sivaneri & Gross, 2017.

Other collaboration strategies reported in the literature include UAVs acting as communication relays to extend connectivity between UGVs and base stations (Johansen et al., 2014), UGVs serving as mobile landing or charging platforms for UAVs

(Cheng et al., 2023), cooperative mapping and sensor-fusion workflows in which aerial maps are refined by ground agents for traversal planning (Zhang et al., 2025), and cooperative localization where ground vehicles assist aerial pose estimation via ranging or visual markers (Sivaneri & Gross, 2017) (see Table 4).

Moreover, implementing this coordinated approach through a swarm-based system presents even more benefits, significantly increasing its general performance. Specifically, by employing the core principles of swarm intelligence, such as redundancy, local communication, and decentralized decision-making, these air-ground systems can naturally adapt to changing conditions, reallocate tasks, and continue operating despite individual unit failures (Brambilla et al., 2013).

Table 4: Collaborative UAV-UGV approaches in GPS-denied or challenging environments

Collaboration Type	Main idea	Source
Communication relay	UAV acts as an aerial relay to extend communication range between UGVs or back to a remote base, enabling coordinated operations in areas with limited connectivity.	Johansen et al., 2014
UGV as a landing platform	UAV performs autonomous landing or docking on a moving UGV, even in GPS-denied environments, using sensor fusion and dynamic tracking to ensure precision and safety.	Cheng et al., 2023
Cooperative mapping/sensor fusion	UAV captures aerial maps that are refined and complemented by UGV data for accurate local mapping, helping robots navigate complex or obstructed environments during search and rescue.	Zhang et al., 2025
Cooperative localization/ranging	UGV assists the UAV in estimating its position and orientation using UWB or vision-based measurements, improving navigation reliability in GNSS-challenged or GPS-denied environments.	Sivaneri & Gross, 2017

Note: UWB = Ultra-Wideband. Data adapted from Johansen et al., 2014; Cheng et al., 2023; Zhang et al., 2025; Sivaneri & Gross, 2017

This swarm-based coordination also enables UAVs and UGVs to more effectively change their strategy based on the needs and risks of the mission, highlighting their increased adaptability in these environments. This decentralized model also allows



scalability, as units of drones or ground robots can be added to increase efficiency and coverage when required (Zhang et al., 2025).

Therefore, this swarm-based coordination of air-ground robotic systems holds promising capabilities that deserve to be further studied and developed in order to increase resilience, flexibility, and coverage in such unpredictable and chaotic environments. The quantitative potential of this approach is demonstrated in realistic simulations. For instance, a study modeling a post-tsunami environment found that a swarm of just five autonomous UAVs could achieve 90% sensor coverage over a 2 km² area in under 90 minutes, reaching nearly 99% coverage within two hours (Arnold et al., 2018). This illustrates the potential of swarm-based systems to deliver on the promise of rapid, large-area assessment that is critical in the immediate aftermath of a disaster.

Among these collaboration strategies, the use of UAVs as communication relays is arguably the most critical for real-world effectiveness, as it directly addresses the common failure of terrestrial networks in disasters. For instance, a UAV can maintain a vital data link between a UGV trapped in rubble and the command center, ensuring that victim location data is successfully transmitted even when all other communications are down. While challenges like limited UAV flight time persist, this strategy provides the foundational connectivity that enables all other forms of coordination.

4.3. Sensor implementation for victim detection and mapping

Implementing sensors into air-ground robot systems can increase their performance in disaster scenarios. Through the combination of the capabilities of multiple sensors across these systems, this integration can potentially overcome many limitations. For example, UAVs can use RGB and thermal cameras to collect data and thermal imagery, aiding in the search for victims from above. Moreover, UGVs can use LiDAR and sound sensors for on-site mapping and close-up victim detection, which may be particularly useful in areas blocked from GPS signals. Bultmann et al. (2021) present in their paper a UAV system with LiDAR, RGB, and thermal sensors, showcasing improved object recognition and increased overall reliability (see Figure 6). In parallel, Xu et al. (2022) provide a study of a LiDAR-based sensor for SLAM (Simultaneous Localization and Mapping), demonstrating how the implementation of this technology can improve localization and mapping under unpredictable settings.



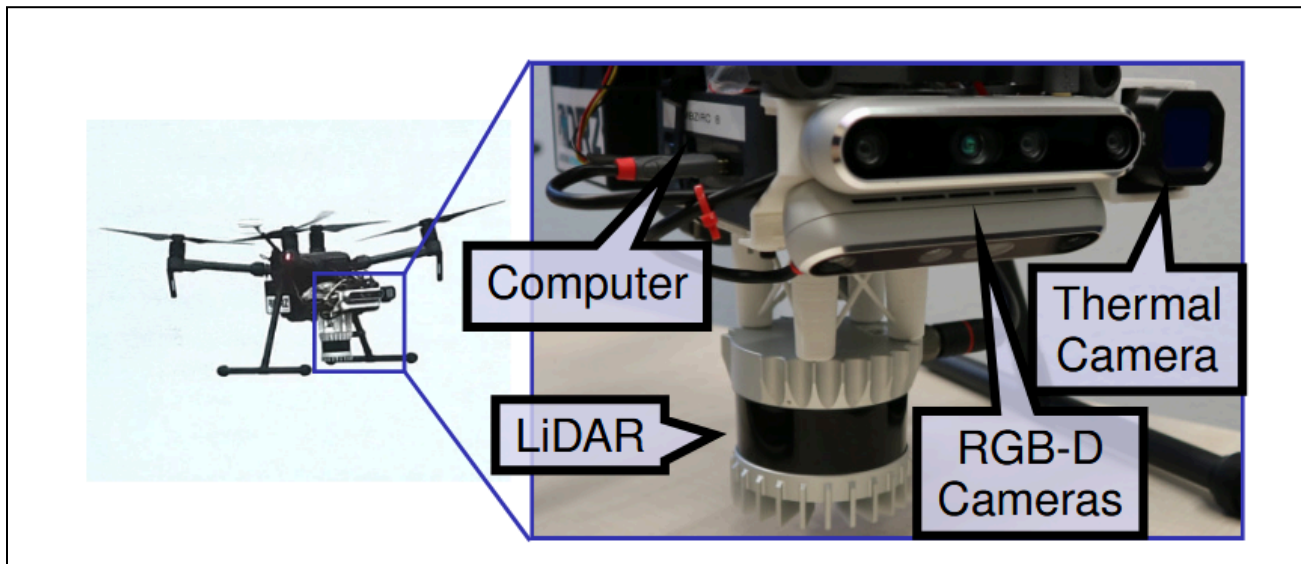


Figure 6: Multi-sensor fusion for UAV navigation and perception

Note: This diagram illustrates the types of sensors integrated for advanced perception in UAVs. From “Real-Time Multi-Modal Semantic Fusion on Unmanned Aerial Vehicles” by Bultmann et al., 2021, arXiv. Open access.

Considering these studies, it is evident that the use of such sensors in disaster scenarios brings numerous efficiency benefits (Cani et al., 2025). Therefore, their use in air-ground swarms can, combined with these systems’ innate robustness and flexibility, provide increased precision and reliability in such sensitive settings. In turn, this leads to fewer casualties among victims and responders compared to conventional rescue methods that rely solely on human teams or non-coordinated robotic systems. This is because the combination of different sensors can increase the situational awareness of the system, enabling faster and more effective victim detection even in challenging settings (Schichler et al., 2025).

However, it is important to note that while studies like Bultmann et al. (2021) and Xu et al. (2022) provide strong empirical evidence for improved sensor performance and mapping accuracy, the claim of directly reducing casualties remains a projected, outcome-based benefit that requires further validation through large-scale field trials.

4.4 Field deployments and case examples

The ICARUS Project

The EU-FP7 ICARUS project deployed a fleet of unmanned aerial and ground robots equipped with victim-detection sensors and a radio network to support responders in realistic disaster simulations (Doroftei et al., 2014). In various simulated collapse scenarios, such as destroyed buildings and flood-affected areas, the UAVs managed to conduct aerial reconnaissance and thermal imaging, while the UGVs explored debris piles to perform close-range inspections and payload deliveries. While ICARUS deployments were not robot swarms in the strictest technical sense, they did incorporate swarm-inspired principles.

Analyzing their performance, expert end-users evaluated functionality and efficiency, highlighting the ICARUS robots' decreased deployment times, improved situational awareness, and robustness against failures, which are core benefits arising from its decentralized, swarm-inspired design (De Cubber et al., 2013).

Surfside Condo Collapse

During the Champlain Towers South condominium collapse in Surfside, Florida, rescue teams rapidly deployed heterogeneous unmanned systems in what became the largest and longest drone-based disaster response on record. As detailed by Rao et al. (2023), hundreds of UAV missions were demanded to generate orthomosaic maps, digital elevation models, and thermal searches for survivors. At the same time, UGVs were deployed into the standing structure to inspect inaccessible areas and act as communication relays for aerial units. Moreover, these ground robots were also equipped with 360° cameras and thermal sensors in order to improve close-up victim detection in the rubble.

In retrospect, these operations underscored the immense value of integrating aerial and ground platforms, most notably with a swarm-based approach, demonstrating their beneficial and efficient applications in disaster response. Across both simulated and real-world deployments, end-users consistently identify the integration of aerial and ground perspectives as the most critical factor for improving situational awareness and reducing operational time, directly supporting this review's thesis. However, there are many persistent challenges in these settings that need to be addressed.

5. Persistent challenges in rubble environments

5.1. Environmental and perceptual challenges

UAVs and UGVs continue to face numerous challenges during search and rescue missions. For example, many ground robots encounter difficulties when traversing irregular terrain or unstable structures, compromising mission safety and navigation. Moreover, in these chaotic settings, uneven surfaces and loose debris can immobilize or entrap the robots (Carlson & Murphy, 2005). As described by Solmaz et al. (2024), robots and communication equipment can also be damaged by collapsing buildings, leading to reduced or lost functionality and loss of coordination between units, especially when swarm-based approaches are being used. Additionally, complex terrain can cause malfunctions in many of the systems used, which require human intervention and, therefore, can put responders' lives at risk.

Another challenge encountered by air-ground robots in rubble environments is perceptual degradation, which significantly limits robotic performance in these scenarios. In relation to that, this term refers to the difficulties faced by vision-based sensors in enclosed and collapsed structures, as they are exposed to suspended dust, complete darkness, smoke, and other occlusion factors (Reich & Sklar, 2006). These factors obstruct visual feeds and sensor readings, and diminish the robot's ability to detect victims and navigate correctly, also hindering the mission's operational success (Cadena et al., 2016). These limitations demonstrate the need for more robust sensors and new perception strategies, together with more reliable communications networks.

5.2. Communication and localization constraints

Communication and localization between robots are often hindered in disaster scenarios, as collapsing buildings, rubble,



structural fires, and explosions may damage cables and interfere with GPS, Wi-Fi, and other signals, forcing robots to operate in isolation and largely impairing rescue missions. Given the difficulty of maintaining situational awareness and coordination in GPS-denied and connectivity-scarce zones, Lajoie et al. (2020) developed DOOR-SLAM, which is a system based on peer-to-peer communication that does not require connectivity between units. Similarly, other studies have also discussed ways in which fragmented networks can be preserved in these scenarios. For example, using C-SLAM (Collaborative Simultaneous Localization and Mapping) in multi-robot systems or robotic swarms can prevent communication-related issues (Lajoie et al., 2022), which could otherwise disrupt formations, delay progress, and cause errors in the collective decision-making of the group.

Aiming to overcome the localization constraints in disaster scenarios, researchers developed various techniques and frameworks. For example, one related approach is utilizing a landmark-based localization system (LanBLoc) to predict the future state of moving entities along the affected areas, replacing the use of GPS in these isolated settings (Sapkota & Madria, 2024). Moreover, vision-based approaches can help mitigate localization-related problems, as seen in the use of Visual Simultaneous Localization and Mapping (VSLAM) techniques, which use visual data to create 3D maps of the surroundings without the need for external connections (Lu et al., 2022).

Together, these locally-based communication and localization strategies form resilient foundations for swarm coordination when traditional connectivity methods fail. This collective research effort reveals a clear pattern in the field's evolution: a deliberate shift away from reliance on fragile, pre-existing infrastructure (like GPS and Wi-Fi) and toward self-reliant, onboard solutions. These systems allow robot swarms to generate their own shared understanding of the environment through peer-to-peer communication and collaborative mapping, representing a critical shift for enabling autonomy in GNSS-denied environments.

5.3. Autonomy and human-swarm interaction

Managing swarm robots during search and rescue missions is both challenging and risky. This can be attributed to the fact that, as units get added to the swarm, more coordination, control, and efficient decision-making are demanded to maintain proper functionality. Aiming to mitigate this difficulty, Hunt et al. (2023) investigate how human-swarm collaboration in the context of search and rescue can improve performance and autonomy of swarms, optimizing the reliability and efficiency of these systems as humans can oversee tasks and decisions. Comparably, Kelly et al. (2024), addressing the main trade-off between centralized and decentralized control illustrated in Figure 7, propose a dynamic hybrid control architecture combining centralized and decentralized control strategies to optimize swarm performance while reducing human cognitive load. This approach offers a solid middle ground between efficiency (centralization) and scalability (decentralization).

Moreover, it is essential for robotic swarms to maintain decision-making in real time to avoid further complications in disaster areas. From this perspective, Li et al. (2025) propose a Human-in-the-loop Multi-Robot Collaboration Framework (HMCF), which increases adaptability by reallocating tasks and matching capabilities between the swarm, all supervised by humans to ensure safety and reliability. Similarly, Calzolari et al. (2024) present a decentralized collaborative framework based on Reinforcement Learning, enabling faster, smarter, and more efficient decision-making by learning from the environment and operator feedback.



To provide a concise overview of the research discussed above, Table 5 summarizes the main efforts and approaches developed to address the communication, localization, and autonomy challenges faced by aerial-ground swarm robotics in disaster scenarios.

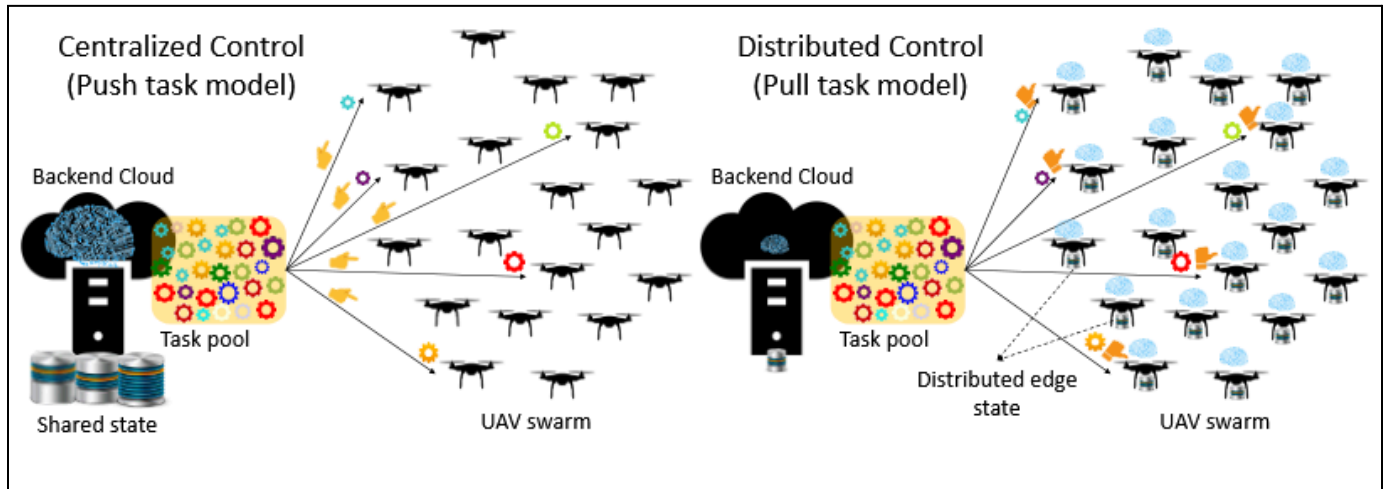


Figure 7: Centralized vs. distributed control architectures for swarm coordination

Note: This figure contrasts the centralized ("push") and distributed ("pull") models of task allocation and state management in swarm robots. From "To Centralize or Not to Centralize: A Tale of Swarm Coordination" by Hu et al., 2018, arXiv. Open access.

Table 5: Summary of recent research in aerial-ground swarm robotics

Category	Challenge	Approach	Researchers	Outcome
Communication and Localization	Reliance on fragile external infrastructure (GPS, Wi-Fi)	Peer-to-peer communication (DOOR-SLAM), collaborative mapping (C-SLAM)	Lajoie et al. (2020, 2022)	Maintains coordination without central servers; resilient swarm operation
Navigation and Mapping	GPS-denied or signal-limited environments	Landmark-based localization (LanBLoc), Visual SLAM (VSLAM)	Sapkota & Madria (2024); Lu et al. (2022)	Robots navigate and map autonomously, ensuring continuous functionality
Autonomy and Human-Swarm Interaction	Managing complex swarms without overloading operators	Dynamic hybrid control models (centralized + decentralized), human-in-the-loop frameworks, decentralized reinforcement learning	Hunt et al. (2023); Kelly et al. (2024); Li et al. (2025); Calzolari et al. (2024)	Enhances real-time decision-making, adaptability, safety, and efficiency of swarms

Note: Data adapted from Lajoie et al. (2020, 2022); Lu et al. (2022); Sapkota & Madria (2024); Hunt et al. (2023); Kelly et al. (2024); Li et al. (2025); Calzolari et al. (2024).

6. Future directions and opportunities

6.1. Environmental and perceptual challenges

Considering the need for autonomous and efficient robots in search and rescue contexts, improvements in decision-making and reliable communication must be further developed. With such an objective, the implementation of machine learning strategies presents potential benefits to decision-making, as the system could adjust its actions based on the data collected from the environment (Gielis et al., 2022). This approach would allow for minimal human intervention, enabling air-ground swarms to operate more efficiently while minimizing risk to human responders. Moreover, Khatib et al. (2006) propose a coordination strategy enhanced by machine learning-based detection, which improves data integrity and system robustness. This strategy, if used appropriately in search and rescue contexts, could enable faster victim detection and more effective collaboration.

As discussed in Section 5, communication barriers are one of the main obstacles during search and rescue missions, having the capacity to hinder an entire operation. Therefore, it is necessary to develop more resilient communication networks to guarantee mission success in these scenarios (Sterbenz et al., 2010). For example, Mauthe et al. (2016) present deployable



backup networks that integrate heterogeneous communication technologies. This approach could maintain communication between robots and responders even when normal systems break down, ensuring that all critical information is delivered. Moreover, Gorbil & Gelenbe (2013) propose Oppcomms (opportunistic communications), an approach that exchanges messages at a close range by exploiting human mobility without the use of any infrastructure. This system, similarly to the one presented by Mauthe et al., could maintain reliable and resilient communication despite any environmental or man-made barriers.

These two research thrusts (smarter autonomy and resilient networking) are deeply interconnected: reliable communication is necessary for distributing learned behaviors and coordinating decisions, while intelligent autonomy can help manage network resources (Mauthe et al., 2016; Gorbil & Gelenbe, 2013). Future progress in these areas should be evaluated against standardized metrics, such as communication latency under interference, decision-making speed in novel scenarios, and the rate of successful task completion without human intervention.

6.2 Multidisciplinary collaboration and policy frameworks

The future success of air swarm systems in search and rescue missions will depend on collaboration among multiple groups, such as researchers, manufacturers, ethicists, and policymakers (Alqudsi & Makaraci, 2024). These systems, entrusted with life-saving responsibilities, require high dependability, ethical grounding, and real-world applicability. Hence, collaboration between numerous disciplines is needed to ensure safety and reliability in disaster scenarios. Expanding on this, the air-ground swarm system must be functional, performing as expected; safe, not putting people's lives at risk during an operation; and ethical, adhering to a set of moral principles that dictate its decision-making (Waykar, 2021).

Moreover, the use of air-ground swarm systems should also be discussed at the government level. Therefore, establishing robust policy frameworks is crucial for their effective and ethical use (Winfield et al., 2025). Concerning this, government agencies must develop clear guidelines and regulations to manage accountability in deployments. For example, an article by Pepple (2025) discusses the need for policy and regulation to ensure the humanitarian principles involved with the deployments of such robots.

Furthermore, the development of federal policy frameworks for unmanned vehicles emphasizes the importance of safety and transparency in this system (Watts et al., 2012), especially in emergency response contexts. Expanding on this, it underscores that the path to deployment is not purely technical; successful integration requires parallel progress in technology development, ethical guideline creation, and regulatory framework establishment (Pepple, 2025). The most robust technical system will fail to save lives if policy barriers prevent its timely deployment or if public trust is lacking due to ethical concerns.

7. Conclusion

In this paper, we reviewed the operational advantages of heterogeneous air-ground swarms for urban search-and-rescue, stemming from their complementary strengths (UAV overhead mapping + UGV close-range sensing), sensor fusion, and decentralized coordination. These capabilities are promising, but they do not eliminate the hard lessons from field deployments. Fragile communications, sensor degradation in rubble, limited endurance, and gaps in real-time autonomy in complex, dynamic environments still constrain real-world deployment, limiting operational reliability and safety.



Given these gaps, we recommend a focused engineering agenda: prioritize resilient networking, such as opportunistic relays and resistance to degradation; implement robust multimodal perception and SLAM resilient to dust, smoke, darkness, and occlusion; and design autonomous models that are context-aware and confidence-sensitive to enable robust decision-making on when to act autonomously and when to request human oversight. All of this must be validated in realistic field trials, not only in simulations.

Finally, technical advances must go hand in hand with policy and practice. We need interdisciplinary standards, ethical and accountability frameworks, and regular discussions to align development with operational needs and societal values that involve emergency managers, researchers, ethicists, manufacturers, and policymakers. If we coordinate research, policy, and real-world testing now, these swarms can move from promising prototypes to trusted, life-saving tools.

8. References

- Abraham, L., Biju, S., Biju, F., Jose, J., Kalantri, R., & Rajguru, S. (2019). Swarm robotics in disaster management. 2019 *International Conference on Innovative Sustainable Computational Technologies (CISCT)*, 1–5. <https://doi.org/10.1109/CISCT46613.2019.9008139>
- Albiero, D., Garcia, A. P., Umezu, C. K., & de Paulo, R. L. (2022). Swarm robots in mechanized agricultural operations: A review about challenges for research. *Computers and Electronics in Agriculture*, 193, 106608. <https://doi.org/10.1016/j.compag.2021.106608>
- Alqudsi, Y., & Makaraci, M. (2024). Swarm robotics for autonomous aerial robots: Features, algorithms, control techniques, and challenges. 2024 *4th International Conference on Emerging Smart Technologies and Applications (eSmarTA)*, 1–9. <https://doi.org/10.1109/eSmarTA62850.2024.10639038>
- Arnold, R. D., Yamaguchi, H., & Tanaka, T. (2018). Search and rescue with autonomous flying robots through behavior-based cooperative intelligence. *Journal of International Humanitarian Action*, 3(1), Article 18. <https://doi.org/10.1186/s41018-018-0045-4>
- Barca, J. C., & Sekercioglu, Y. A. (2013). Swarm robotics reviewed. *Robotica*, 31(3), 345–359. <https://doi.org/10.1017/S026357471200032X>
- Bayindir, L. (2016). A review of swarm robotics tasks. *Neurocomputing*, 172, 292–321. <https://doi.org/10.1016/j.neucom.2015.05.116>
- Berns, K., Nezhadfar, A., Tosa, M., Balta, H., & De Cubber, G. (2017). Unmanned ground robots for rescue tasks. In G. De Cubber, D. Doroftei, K. Rudin, K. Berns, A. Matos, D. Serrano, J. M. Sanchez, S. Govindaraj, J. Bedkowski, R. Roda, E. Silva, S. Ourevitch, R. Wagemans, V. Lobo, G. Cardoso, K. Chintamani, J. Gancet, P. Stupler, A. Nezhadfar, ... R. Baptista (Eds.), *Search and rescue robotics—From theory to practice* (pp. 221–230). IntechOpen. <https://doi.org/10.5772/intechopen.69491>
- Bjerknes, J. D., & Winfield, A. F. T. (2013). On fault tolerance and scalability of swarm robotic systems. In A. Martinoli, F. Mondada, N. Correll, G. Mermoud, M. Egerstedt, M. A. Hsieh, L. E. Parker, & K. Støy (Eds.), *Distributed autonomous robotic*



systems (Vol. 83, pp. 431–444). Springer. https://doi.org/10.1007/978-3-642-32723-0_31

Brambilla, M., Ferrante, E., Birattari, M., & Dorigo, M. (2013). Swarm robotics: A review from the swarm engineering perspective. *Swarm Intelligence*, 7(1), 1–41. <https://doi.org/10.1007/s11721-012-0075-2>

Bultmann, S., Quenzel, J., & Behnke, S. (2021). *Real-time multi-modal semantic fusion on unmanned aerial vehicles* (arXiv:2108.06608). arXiv. <https://doi.org/10.48550/arXiv.2108.06608>

Cadena, C., Carlone, L., Carrillo, H., Latif, Y., Scaramuzza, D., Neira, J., Reid, I., & Leonard, J. J. (2016). Past, present, and future of simultaneous localization and mapping: Towards the robust-perception age. *IEEE Transactions on Robotics*, 32(6), 1309–1332. <https://doi.org/10.1109/TRO.2016.2624754>

Calzolari, G., Sumathy, V., Kanellakis, C., & Nikolakopoulos, G. (2024). *Reinforcement learning driven multi-robot exploration via explicit communication and density-based frontier search* (arXiv:2412.20049). arXiv. <https://doi.org/10.48550/arXiv.2412.20049>

Cani, J., Koletsis, P., Foteinos, K., Kefaloukos, I., Argyriou, L., Falelakis, M., Pino, I. D., Santamaria-Navarro, A., Čech, M., Severa, O., Umbrico, A., Fracasso, F., Orlandini, A., Drakoulis, D., Markakis, E., Varlamis, I., & Papadopoulos, G. T. (2025). *TRIFFID: Autonomous robotic aid for increasing first responders efficiency* (arXiv:2502.09379). arXiv. <https://doi.org/10.48550/arXiv.2502.09379>

Carlson, J., Murphy, R. R., & Nelson, A. (2004). Follow-up analysis of mobile robot failures. *IEEE International Conference on Robotics and Automation, 2004. Proceedings. ICRA '04. 2004*, 5, 4987–4994. <https://doi.org/10.1109/ROBOT.2004.1302508>

Carlson, J., & Murphy, R. R. (2005). How UGVs physically fail in the field. *IEEE Transactions on Robotics*, 21(3), 423–437. <https://doi.org/10.1109/TRO.2004.838027>

Casper, J., & Murphy, R. R. (2003). Human-robot interactions during the robot-assisted urban search and rescue response at the World Trade Center. *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, 33(3), 367–385. <https://doi.org/10.1109/TSMCB.2003.811794>

Chatziparaschis, D., Lagoudakis, M. G., & Partinevelos, P. (2020). Aerial and ground robot collaboration for autonomous mapping in search and rescue missions. *Drones*, 4(4), Article 79. <https://doi.org/10.3390/drones4040079>

Chen, K., Zhao, W., Liu, Y., Xia, Y., Liang, W., & Wang, S. (2025). *UAV-UGV cooperative trajectory optimization and task allocation for medical rescue tasks in post-disaster environments* (arXiv:2506.06136). arXiv. <https://doi.org/10.48550/arXiv.2506.06136>

Cheng, C., Li, X., Xie, L., & Li, L. (2023). A unmanned aerial vehicle (UAV)/unmanned ground vehicle (UGV) dynamic autonomous docking scheme in GPS-denied environments. *Drones*, 7(10), Article 613. <https://doi.org/10.3390/drones7100613>

Christensen, A. L., O'Grady, R., & Dorigo, M. (2009). From fireflies to fault-tolerant swarms of robots. *IEEE Transactions on*



Evolutionary Computation, 13(4), 754–766. <https://doi.org/10.1109/TEVC.2009.2017516>

De Cubber, G., Doroftei, D., Serrano, D., Chintamani, K., Sabino, R., & Ourevitch, S. (2013). The EU-ICARUS project: Developing assistive robotic tools for search and rescue operations. 2013 IEEE International Symposium on Safety, Security, and Rescue Robotics (SSRR), 1–4. <https://doi.org/10.1109/SSRR.2013.6719323>

Dias, P. G. F., Silva, M. C., Rocha Filho, G. P., Vargas, P. A., Cota, L. P., & Pessin, G. (2021). Swarm robotics: A perspective on the latest reviewed concepts and applications. *Sensors*, 21(6), Article 2062. <https://doi.org/10.3390/s21062062>

Dorigo, M. (2005). SWARM-BOT: An experiment in swarm robotics. *Proceedings 2005 IEEE Swarm Intelligence Symposium*, 2005. SIS 2005., 192–200. <https://doi.org/10.1109/SIS.2005.1501622>

Doroftei, D., Matos, A., & De Cubber, G. (2014). Designing search and rescue robots towards realistic user requirements. *Applied Mechanics and Materials*, 658, 612–617. <https://doi.org/10.4028/www.scientific.net/AMM.658.612>

Gielis, J., Shankar, A., & Prorok, A. (2022). A critical review of communications in multi-robot systems. *Current Robotics Reports*, 3(4), 213–225. <https://doi.org/10.1007/s43154-022-00090-9>

Gorbil, G., & Gelenbe, E. (2013). Disruption tolerant communications for large scale emergency evacuation. 2013 IEEE International Conference on Pervasive Computing and Communications Workshops (PERCOM Workshops), 540–546. <https://doi.org/10.1109/PerComW.2013.6529555>

Hakami, A., Kumar, A., Shim, S., & Nahleh, Y. (2013). Application of soft systems methodology in solving disaster emergency logistics problems. *World Academy of Science, Engineering and Technology International Journal of Industrial Science and Engineering*, 7(6), 786–790.

Hu, J., Bruno, A., Zagieboylo, D., Zhao, M., Ritchken, B., Jackson, B., Chae, J. Y., Mertil, F., Espinosa, M., & Delimitrou, C. (2018). To centralize or not to centralize: A tale of swarm coordination (arXiv:1805.01786). arXiv. <https://doi.org/10.48550/arXiv.1805.01786>

Hunt, W., Ryan, J., Abioye, A. O., Ramchurn, S. D., & Soorati, M. D. (2023). Demonstrating performance benefits of human-swarm teaming (arXiv:2303.12390). arXiv. <https://doi.org/10.48550/arXiv.2303.12390>

Johansen, T. A., Zolich, A., Hansen, T., & Sorensen, A. J. (2014). Unmanned aerial vehicle as communication relay for autonomous underwater vehicle—Field tests. 2014 IEEE Globecom Workshops (GC Wkshps), 1469–1474. <https://doi.org/10.1109/GLOCOMW.2014.7063641>

Kelly, T. G., Soorati, M. D., Zauner, K.-P., Ramchurn, S. D., & Tarapore, D. (2024). Trade-offs of dynamic control structure in human-swarm systems (arXiv:2408.02605). arXiv. <https://doi.org/10.48550/arXiv.2408.02605>

Khaldi, B., & Cherif, F. (2015). An overview of swarm robotics: Swarm intelligence applied to multi-robotics. *International Journal of Computer Applications*, 126(2), 31–37. <https://doi.org/10.5120/ijca2015906000>



Khatib, A., Hamed, O., Hamlich, M., & Mouchtachi, A. (n.d.). *Enhancing multi-robot systems cooperation through machine learning-based anomaly detection in target pursuit*.

Lajoie, P.-Y., Ramtoula, B., Chang, Y., Carlone, L., & Beltrame, G. (2020). DOOR-SLAM: Distributed, online, and outlier resilient SLAM for robotic teams. *IEEE Robotics and Automation Letters*, 5(2), 1656–1663. <https://doi.org/10.1109/LRA.2020.2967681>

Lajoie, P.-Y., Ramtoula, B., Wu, F., & Beltrame, G. (2022). Towards collaborative simultaneous localization and mapping: A survey of the current research landscape. *Field Robotics*, 2, 971–1000. <https://doi.org/10.55417/fr.2022032>

Li, B., Zhao, S., Miao, R., & Zhang, R. (2021). A survey on unmanned aerial vehicle relaying networks. *IET Communications*, 15(10), 1262–1272. <https://doi.org/10.1049/cmu2.12107>

Li, Z., Wu, W., Wang, Y., Xu, Y., Hunt, W., & Stein, S. (2025). HMCF: A human-in-the-loop multi-robot collaboration framework based on large language models (arXiv:2505.00820). arXiv. <https://doi.org/10.48550/arXiv.2505.00820>

Lu, W., Zhu, Z., Zhao, Y., Tian, Y., Zeng, J., Zhang, J., Liu, Z., & Wang, F.-Y. (2025). A multi-agent reinforcement learning approach for cooperative air-ground-human crowdsensing in emergency rescue (arXiv:2505.06997). arXiv. <https://doi.org/10.48550/arXiv.2505.06997>

Lu, Z., Liu, F., & Lin, X. (2022). Vision-based localization methods under GPS-denied conditions (arXiv:2211.11988). arXiv. <https://doi.org/10.48550/arXiv.2211.11988>

Mauthe, A., Hutchison, D., Cetinkaya, E. K., Ganchev, I., Rak, J., Sterbenz, J. P. G., Gunkel, M., Smith, P., & Gomes, T. (2016). Disaster-resilient communication networks: Principles and best practices. 2016 *8th International Workshop on Resilient Networks Design and Modeling (RNDM)*, 1–10. <https://doi.org/10.1109/RNDM.2016.7608262>

Moosavi, S. K. R., Zafar, M. H., & Sanfilippo, F. (2024). Collaborative robots (cobots) for disaster risk resilience: A framework for swarm of snake robots in delivering first aid in emergency situations. *Frontiers in Robotics and AI*, 11, Article 1362294. <https://doi.org/10.3389/frobt.2024.1362294>

Munasinghe, I., Perera, A., & Deo, R. C. (2024). A comprehensive review of UAV-UGV collaboration: Advancements and challenges. *Journal of Sensor and Actuator Networks*, 13(6), Article 81. <https://doi.org/10.3390/jsan13060081>

Murphy, R. R. (2010). Navigational and mission usability in rescue robots. *Journal of the Robotics Society of Japan*, 28(2), 142–146. <https://doi.org/10.7210/jrsj.28.142>

Murphy, R. R. (2012). A decade of rescue robots. 2012 *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 5448–5449. <https://doi.org/10.1109/IROS.2012.6386301>

Murphy, R. R. (2017). *Disaster robotics*. MIT Press.

Murphy, R. R., & Stover, S. (2008). Rescue robots for mudslides: A descriptive study of the 2005 La Conchita mudslide



response. *Journal of Field Robotics*, 25(1-2), 3-16. <https://doi.org/10.1002/rob.20222>

Navarro, I., & Matía, F. (2013). An introduction to swarm robotics. *ISRN Robotics*, 2013, Article 608164. <https://doi.org/10.5402/2013/608164>

Pepple, P. (2025). Autonomous system for disaster response & recovery. *European Journal of Computer Science and Information Technology*, 13(1), 45-62. <https://doi.org/10.37745/ejcsit.2013/voll3n14562>

Queralta, J. P., Taipalmaa, J., Can Pullinen, B., Sarker, V. K., Nguyen Gia, T., Tenhunen, H., Gabbouj, M., Raitoharju, J., & Westerlund, T. (2020). Collaborative multi-robot search and rescue: Planning, coordination, perception, and active vision. *IEEE Access*, 8, 191617-191643. <https://doi.org/10.1109/ACCESS.2020.3030190>

Rao, A., Murphy, R., Merrick, D., & Choset, H. (2023). *Analysis of interior rubble void spaces at Champlain Towers South collapse* (arXiv:2301.04743). arXiv. <https://doi.org/10.48550/arXiv.2301.04743>

Reich, J., & Sklar, E. (2006). *Robot-sensor networks for search and rescue*.

Şahin, E. (2005). Swarm robotics: From sources of inspiration to domains of application. In E. Şahin & W. M. Spears (Eds.), *Swarm robotics* (Vol. 3342, pp. 10-20). Springer. https://doi.org/10.1007/978-3-540-30552-1_2

Sapkota, G., & Madria, S. (2024). *Secure navigation using landmark-based localization in a GPS-denied environment* (arXiv:2402.14280). arXiv. <https://doi.org/10.48550/arXiv.2402.14280>

Schichler, L., Festl, K., & Solmaz, S. (2025). Robust multi-sensor fusion for localization in hazardous environments using thermal, LiDAR, and GNSS data. *Sensors*, 25(7), Article 2032. <https://doi.org/10.3390/s25072032>

Schranz, M., Umlauft, M., Sende, M., & Elmenreich, W. (2020). Swarm robotic behaviors and current applications. *Frontiers in Robotics and AI*, 7, Article 36. <https://doi.org/10.3389/frobt.2020.00036>

Singh, P., Klein, L., Agonafer, D., Shah, J. M., & Pujara, K. D. (2015). Effect of relative humidity, temperature and gaseous and particulate contaminations on information technology equipment reliability. *Volume 1: Thermal Management*, V001T09A015. <https://doi.org/10.1115/IPACK2015-48176>

Sivaneri, V. O., & Gross, J. N. (2017). *UGV-to-UAV cooperative ranging for robust navigation in GNSS-challenged environments*.

Solmaz, S., Innerwinkler, P., Wójcik, M., Tong, K., Politi, E., Dimitrakopoulos, G., Purucker, P., Höß, A., Schuller, B. W., & John, R. (2024). Robust robotic search and rescue in harsh environments: An example and open challenges. *2024 IEEE International Symposium on Robotic and Sensors Environments (ROSE)*, 1-8. <https://doi.org/10.1109/ROSE62198.2024.10591144>

Sterbenz, J. P. G., Hutchison, D., Çetinkaya, E. K., Jabbar, A., Rohrer, J. P., Schöllner, M., & Smith, P. (2010). Resilience and survivability in communication networks: Strategies, principles, and survey of disciplines. *Computer Networks*, 54(8), 1245-1265. <https://doi.org/10.1016/j.comnet.2010.03.005>

Tong, K., Hu, Y., Dikic, B., Solmaz, S., Fraundorfer, F., & Watzenig, D. (2024). Robots saving lives: A literature review about search and rescue (SAR) in harsh environments. 2024 IEEE Intelligent Vehicles Symposium (IV), 953–960. <https://doi.org/10.1109/IV55156.2024.10588685>

Waykar, D. Y. A. (2021). Robotic swarms for disaster response: A comprehensive review and prospects for search-and-rescue missions and environmental monitoring. 5(7).

Watts, A. C., Ambrosia, V. G., & Hinkley, E. A. (2012). Unmanned aircraft systems in remote sensing and scientific research: Classification and considerations of use. *Remote Sensing*, 4(6), 1671–1692. <https://doi.org/10.3390/rs4061671>

Winfield, A. F. T., & Nembrini, J. (2006). Safety in numbers: Fault-tolerance in robot swarms. *International Journal of Modelling, Identification and Control*, 1(1), 30–37. <https://doi.org/10.1504/IJMIC.2006.008645>

Winfield, A. F. T., Swana, M., Ives, J., & Hauert, S. (2025). On the ethical governance of swarm robotic systems in the real world. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 383(2289), Article 20240142. <https://doi.org/10.1098/rsta.2024.0142>

Xu, X., Zhang, L., Yang, J., Cao, C., Wang, W., Ran, Y., Tan, Z., & Luo, M. (2022). A review of multi-sensor fusion SLAM systems based on 3D LIDAR. *Remote Sensing*, 14(12), Article 2835. <https://doi.org/10.3390/rs14122835>

Zhang, D., Sessa, S., Kasai, R., Cosentino, S., Di Giacomo, C., Mochida, Y., Yamada, H., Guarnieri, M., & Takanishi, A. (2018). Evaluation of a sensor system for detecting humans trapped under rubble: A pilot study. *Sensors*, 18(3), Article 852. <https://doi.org/10.3390/s18030852>

Zhang, Y., Yan, H., Zhu, D., Wang, J., Zhang, C.-H., Ding, W., Luo, X., Hua, C., & Meng, M. Q.-H. (2025). Air-ground collaborative robots for fire and rescue missions: Towards mapping and navigation perspective (arXiv:2412.20699). arXiv. <https://doi.org/10.48550/arXiv.2412.20699>

Acknowledgements

We would like to thank Dr. Devin Carroll and Kieran Tait for their excellent mentorship and incisive feedback, which shaped this review, providing valuable information and improving the quality and rigor of this paper. We are also grateful to the Indigo Research Program for the opportunity, practical guidance, and access to key reference materials that greatly supported our work. Finally, we acknowledge our peers for their thoughtful and precise critiques and discussions, which provided a new perspective to improve the review's clarity and focus. Collectively, their support was essential to bringing this paper to completion.

Author Biography

Victor Lougon Sampaio Lopes is a 17-year-old student at Instituto GayLussac in Rio de Janeiro, Brazil, and plans to pursue electrical engineering. He takes a hands-on approach to technology, regularly building and programming systems that explore sensing, control, and basic automation.



Victor focuses on practical prototypes with community impact, including a low-cost plant-monitoring device tested in community gardens. He also mentors peers in STEM, helps run workshops, and volunteers with education and citizen-science projects to make technical ideas accessible.

Looking ahead, he aims to study robotics and automation with attention to ethical design, robustness, and scalability. He is particularly interested in autonomous machines, human-technology interaction, and systems that operate reliably in real-world settings. Practical and community-minded, he wants to turn simple experiments into durable tools that address local challenges.

Mentor Contribution Statement

Dr. Devin Carroll, MEAM Lecturer at the University of Pennsylvania, generously provided mentorship throughout the development of this paper on Coordinated Air-Ground Robotic Swarms for Disaster Response. He guided me from the initial idea stage to the final manuscript, helping me identify my research focus and refine the scope of the project. His steady support ensured the work remained both technically sound and aligned with real-world needs.

Dr. Carroll reviewed multiple drafts and offered precise, insightful feedback on structure, argument, and presentation. He suggested relevant literature, helped tighten methodology and interpretation of results, and improved clarity in figures and captions. He was particularly insightful in shaping how I portrayed the usability of coordinated swarms in critical real-world scenarios, strengthening the paper's practical relevance and policy implications.

Through his mentorship, the manuscript became more rigorous, coherent, and accessible to a broader audience. I am deeply thankful for his time, constructive critiques, and ongoing encouragement. His guidance was essential to the successful completion of this research project.

