


## PRODUCT DESCRIPTION

Lignum Fusion 12V Premium Herringbones

Laminate Flooring

PROPERTY	INFORMATION
Dimensions	12.3mm x 100mm x 600mm
Packing	Pack quantity = 1.92m <sup>2</sup> 48 packs per pallet = 92.16m <sup>2</sup>
Production	Direct pressure, melamine impregnated decorative paper onto high density fibreboard core.
Laying	DocLoc glueless locking system Must be laid as a floating floor (see instructions)

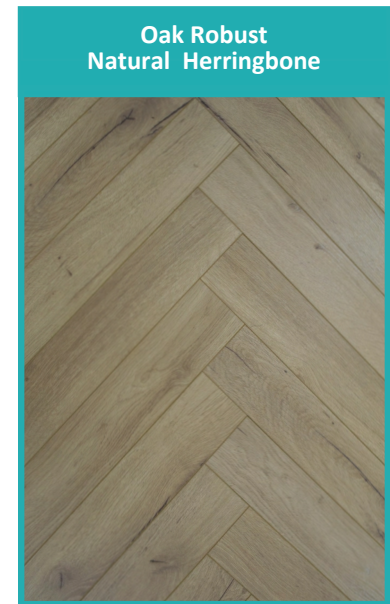

## CLASSIFICATION SPECIFICATIONS

FACTOR	STANDARD	COMMENTS
24 hour swelling	EN 622-5	< 17%
Bending strength	EN 622-5	23 N/mm <sup>2</sup>
Moisture content	EN 622-1	4 - 11 %
Formaldehyde	EN 622-1	≤ 8 (Class E1)
Internal bond	EN 622-5	1 N/mm <sup>2</sup>

## SURFACE PROPERTIES

Slip resistance	EN 13893	AC4
Resistance to fire	EN 13501-1	D <sub>fl</sub> s1
Chemical resistance	EN 13442	Category 5

Wood Innovations 52 Newry Road, Warrenpoint, County Down, N. Ireland. BT34 3LD

Tel: 028 4177 3366

Email: [sales@woodinnovations.co.uk](mailto:sales@woodinnovations.co.uk) [www.woodinnovations.com](http://www.woodinnovations.com)