


Ranch Oak Herringbone

V27SPC-HER-RO

1.8m²/box 48 box/pallet

100 x 600 x (4/0.5mm)(1mm Underlay built in)

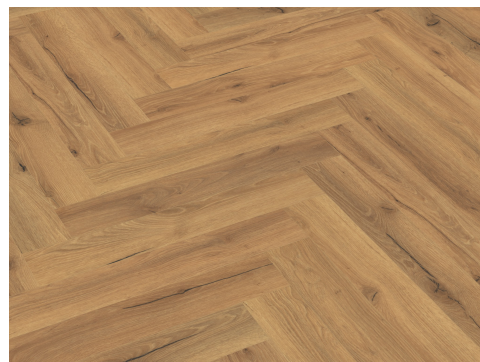

Product

Click LVT Rigid Core SPC

EN ISO 10582

SPC Flooring

Installation

Unilin Angle

Application

EN ISO 10874

23/33



Specification

Thickness



EN ISO 24337

4.0mm & 1mm underlay built on

Weight



EN ISO 24342

2.08kg/m³

Wear Layer



EN ISO 24346

0.5mm

Product Properties

Property

Test Method

Result

Indoor air certificate

Floor-score

Fire resistance

EN 13501-1

BFI-S1

Residual indentation

EN ISO 24343-1(2.5h)

<0.1mm

Dimensional Stability

EN ISO 23999(80°C/6h)

<0.1%

Colour fastness

EN ISO 105-B02

≥6

Slip resistance

EN 13893

DS (>0.3)

Electrical propensity

EN1815

<2kv

Wear and scratch resistance

EN 16094

Pass with good result

Chemical resistance

EN ISO 26987

Pass with good result

Effect of castor chair

EN 425

Suitable

Underfloor heating

Ok (max +27°C)

Anti Bacterial growth

Does not act as substrate

