
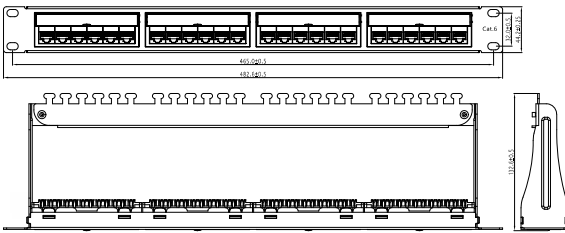


# ExTell CAT6 24 Port Unshielded Patch Panel, PCB Type

Standards - ANSI/TIA 568 2.D, ISO/IEC11801-1, IEC 60603-7 Compliant, RoHS 2002/95/EC Directive compliant

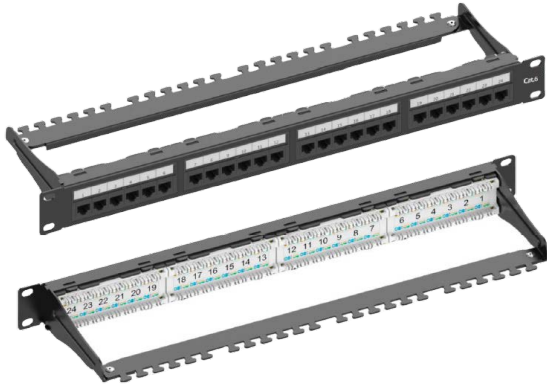

## Environmental Characteristics

Storage Temperature	-40°C to +68°C
Operation Temperature	-10°C to 60°C

## Mechanical Performance

Wiring	T568A and T568B
Insertion Force	≥ 100g with FCC Compliant RJ45 Plug
Retention Strength	≥ 11 lbf
Lifetime	Jack: 750 cycles with FCC Compliant RJ45 Plug
Toolless	When using IDC cap for Wire Management

## Electrical Characteristics

Current Rating	1.5A
Insulation Resistance	≥ 500 MΩ
Contact Resistance	≤ 10 mΩ
DC Resistance	≤ 0.1 Ω
DC/AC Volt Endurance	DC 1000V/AC750V 1 min

## Physical Characteristics

Plastic Housing	High Quality Engineering Plastics
Panel Frame	SPCC Powder Coated, Black
PCB	FR4 1.6mm Thickness
RJ45 Contact	Finish: 50um Gold Plated on Plug Contact Area
	Terminal: 0.35mm Phosphor Bronze Wire
IDC Conductor	0.5mm Phosphor Bronze, tin Plating
Contact Compatibility	AWG 23~26, stranded and solid

## Ordering Information

Model	Description
E6X24UL-PM-BK	ExTell CAT6 24 Port Unshielded Patch Panel, PCB Type

