



HYDRA CANNON



480-V Electric Unit

- Dimensions: 5.2'W x 7.3'L x 6.8'H
- Weight: 3,300 lbs
- 20 HP 2-speed, 480 VAC 3-phase fan motor
- 17,000+ CFM Generated by fan
- In-line filter included. (80 mesh, 177 micron)
- 30-330° oscillation
- 8,100 feet per minute fan outlet air velocity

Intelligent Dust/Evaporative Management

- Monitor & Operate Cannon From Anywhere
- Telematics Data Logging and Service Monitoring





HYDRA CANNON

MANUFACTURED BY COMPANY WRENCH

AUTOMATION FEATURES

- Remote Access: Wi-Fi or Verizon SIM card for internet connectivity & monitoring
- On-board IFM Ethernet Camera provides a live view of machine and conditions
- Telematics: Up to 12 months of data logging, including gallons per hour, temperature, dosing usage, and service monitoring



Control from PC, Mobile Phone, or tablet from anywhere via the internet

CANNON FEATURES

- Throw equals 20-200 feet
- Coverage height is 0-75 feet
- 30 brass nozzles on primary water ring
- 6 brass nozzles on secondary soaking ring
- Separate ball valve control for each water ring
- In-line filter (40 mesh, 420 micron)
- Quick disconnect water fitting up to 2" diameter
- Water can be boosted by 150 PSI using the optional booster pump

Primary (30) Nozzle Ring

WATER PRESSURE (PSI)	40-150
WATER FLOW (GPM)	10.0-19.2

Secondary (6) Nozzle Ring

WATER PRESSURE (PSI)	40-150
WATER FLOW (GPM)	28-48

Fire Nozzle


FOG STREAM

WATER PRESSURE (PSI)	150	150
WATER FLOW (GPM)	35	70

ALL COMBINED

PRIMARY
SECONDARY
& FIRE HOSE

WATER PRESSURE (PSI)	150
WATER FLOW (GPM)	78

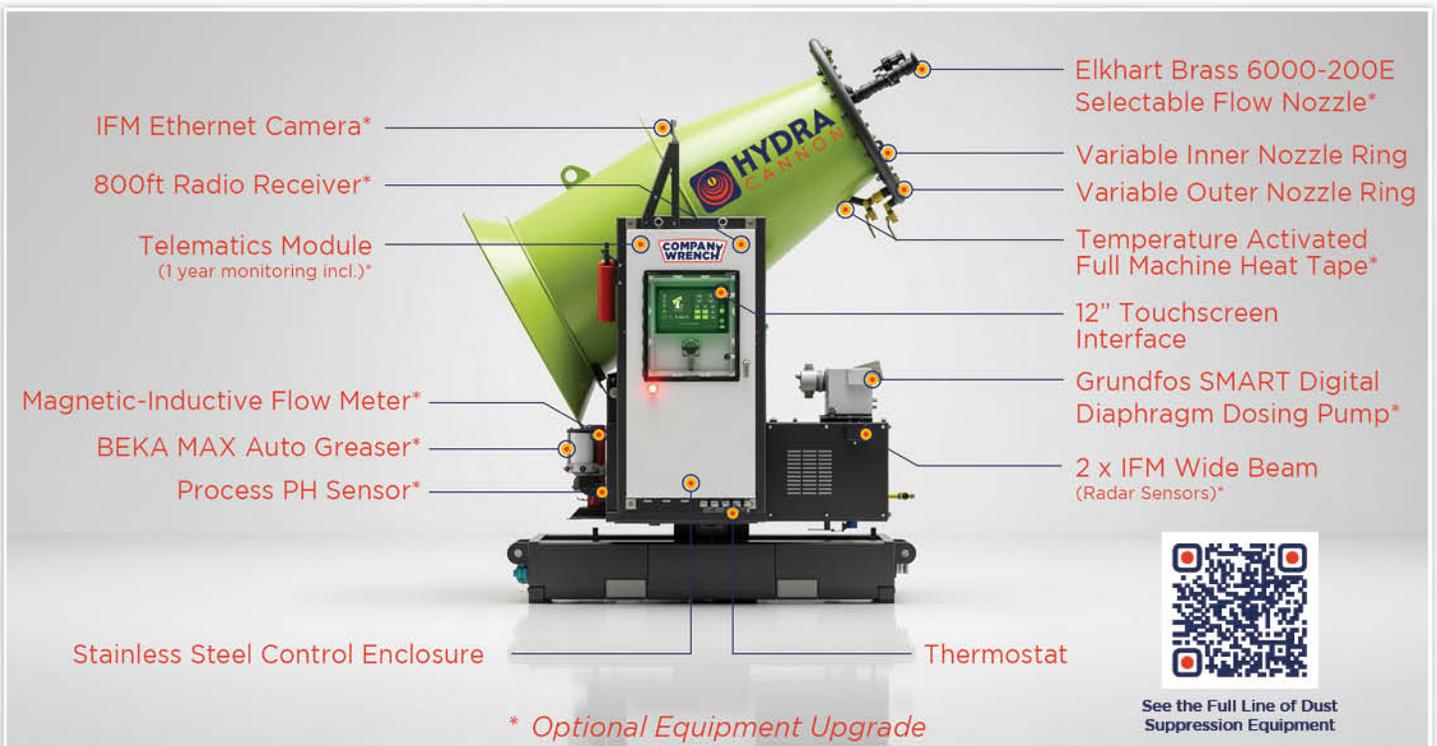

* Optional Equipment Upgrade



See the Full Line of Dust Suppression Equipment

866-262-4181



COMPANYWRENCH.COM