



Lumination®



Flex
Downlights


Current



Lumination® Flex Downlight provides the right general illumination solutions for both commercial and light commercial spaces including higher ceilings at an affordable price.

Features

- Canless Downlight
- 4", 6", 8", and 10" Round Apertures
- Selectable Lumens up to 6000 lm
- Selectable CCT (2700K / 3000K / 3500K / 4000K / 5000K)
- Universal Voltage (120–347V)
- Tri-Dimming: 0–10V to 5%, ELV and TRIAC Phase Dimming to 10%



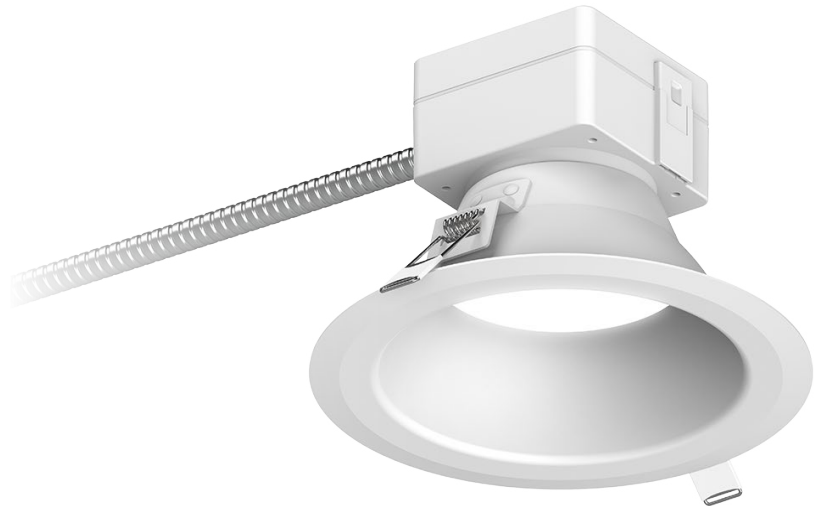


Flex Your Way to Budget-Friendly Solutions

Stretch Your Dollars

The install from below design can be used for new construction, as well as remodel and retrofit applications making it simple to order and easy to install.

					
		4"	6"	8"	10"
Lumens	Low	850	1400	3300	4000
	Mid	1200	1750	4300	5000
	High	1650	2700	4800	6000

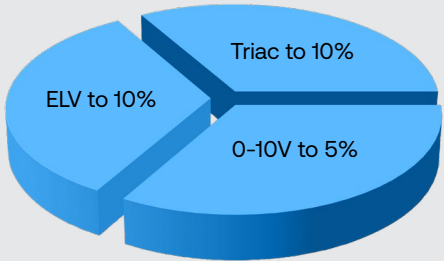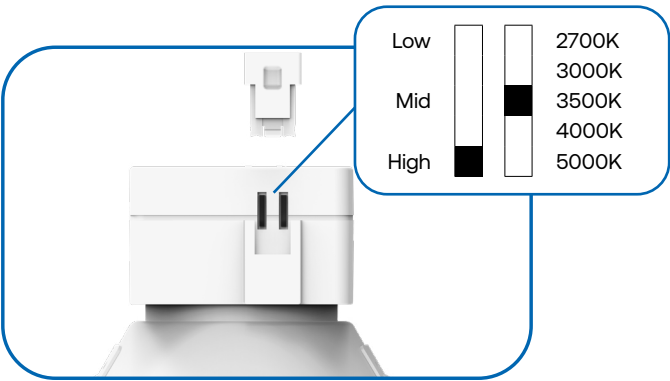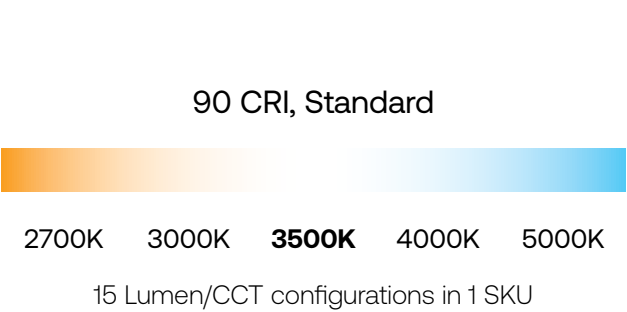

All-in-One Dimming

All Flex downlights have universal 120–347V voltage and multiple dimming protocols, making it easy to satisfy a wide variety of requirements with the same fixture.

Strengthen with Add-ons

Add optional accessories including new construction housing and non-conductive dead front color trims, for even more versatility.



Ready to ship
Learn More





Current - GLI Brands

6085 Parkland Blvd STE 300
Mayfield Heights, OH 44124-4184

LED.com/Lumination

© 2026 Current Lighting Solutions, LLC. Information and specifications subject to change without notice.
GE and the GE monogram are trademarks of the General Electric Company and are used under license.
All values are design or typical values when measured under laboratory conditions.

(Rev 06/17/26)

LUM_LRX_Brochure_R02
