

# MOBILE EPSILON CART

## Tools Required

- Cordless driver with magnetic post and following tips
  - M5 HEX drive
  - 1/2" Deep Well Socket and Ratchet
  - M6 Hex Drive

## Hardware Required (Included)

- 4-M10 Caster Stems
- 4- 65mm Locking Casters
- 10—#10 X 5/8" Panhead Phillips Wood Screws
- 4—M8—1.25 x 20 Cap Screw
- 8—M8-1.5 X 16 Flathead Cap Screw
- 9 in 3M Adhesive Tape

## Installation

1. Unpack Frame and all hardware.
2. Install Caster Stems using 1/2" Deep Well Socket. Ensure stem is not cross threaded before tightening. Ensure stems are securely tightened before installing Caster. Install Flat-head Cap Screws in welded tabs. See Figure A.
3. Slide Lower Epsilon Frame on welded tabs on as seen in Figure B. Ensure there is no gap between Frame and the Leg.
4. Using the M5 Hex Drive, Turn the Cap Screws **COUNTER-CLOCKWISE**, backing the screws out until it presses firmly against the inside of the Lower Epsilon Frame.
5. Using the M8 Cap Screws, Install the Upper Epsilon Frame as seen in Figure C.
6. For Wood and laminate worksurfaces, attach Frame using supplied #10 -5/8" Wood Screws, holding a 1/16" margin between edge of worksurface and frame legs.
7. For Glass Surfaces, attach frame to painted side of the glass using included 3M Tape. Clean application areas of tape on frame and painted glass using Naphtha and allow it to dry completely. Tape should be applied to frame next to leg attachment as seen in Figure D.
8. Remove backer from one side of tape and apply exposed tape surface to frame. Partially peel remaining backer off tape, a little over half way, and fold backer back over tape (Figure D). Locate frame on surface leaving 1/16" margin around legs. Pull backer off tape and press tape firmly in place. Place 20-30 lbs of weight over each of the tape location and allow 20-30 minutes for tape to take an initial set before removing weight.

Figure A

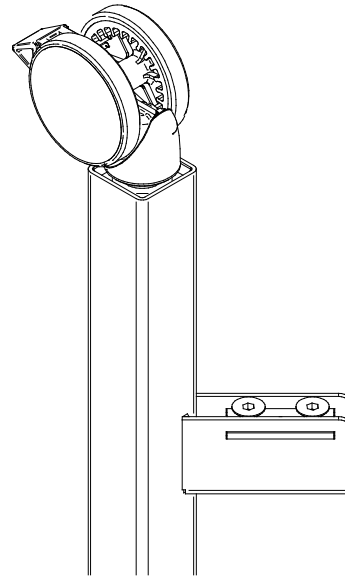


Figure B

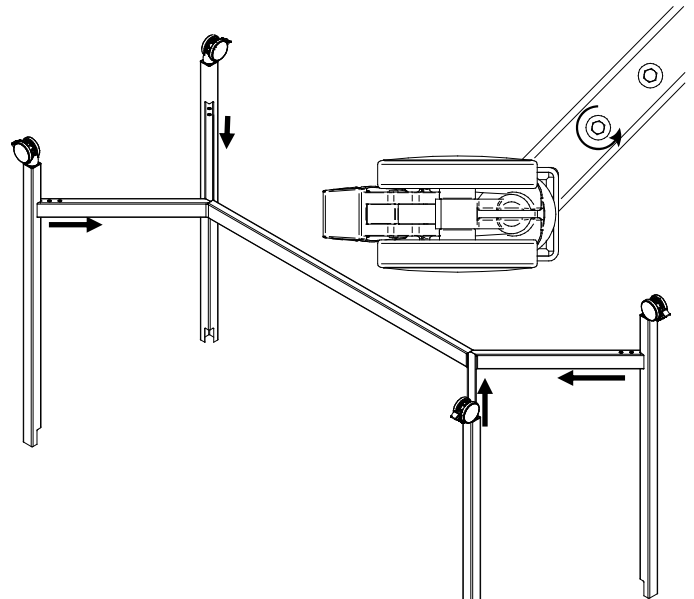


Figure C


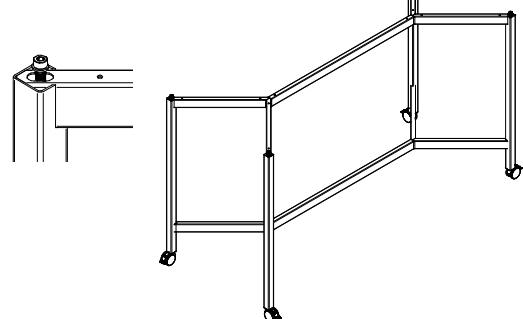


Figure D

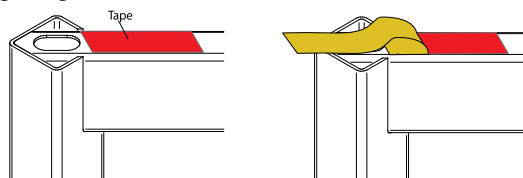

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call Kimball Office Customer Care.

Kimball® Office