# WORK|ABLE<sup>™</sup>

#### Assembly Instructions

### **Plug Power infeed**


#### Installation

1. Orient the jumper so the pen housing matches the power block, as shown in Figure A.

2. Slide the jumper on to the power block. See Figure B. Plug the infeed into 20 amp powered receptacle.

**Warning:** Connection to building power must be completed by a licensed electrician. Installation must Be in accordance with National Electrical Code and local codes. This system may be connected to more than one source of supply. No single circuit may be powered by more than one source. Do not interconnect system electrical power from different feed units. This can cause shock and fire hazard. Be certain all sources are disconnected prior to any servicing.






Keyed Housing



Figure B



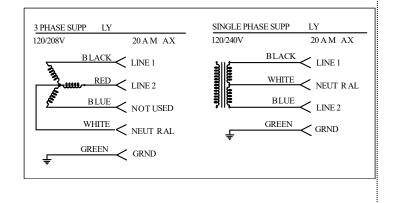

## Kimball

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call Kimball Customer Care.

Part 3239840,-