

# ETARRAN™ PANEL SYSTEM

## Table of Contents

### Price List Dates:

Pricing	10.02.23
Revisions	08.28.23



▶ See page

<b>Statement of Line</b>	ET.2
Panels, Connectors, & Trim	ET.2
Power & Data	ET.3
<b>Planning</b>	ET.4
Overview	ET.4
Product Information	ET.5
Application Guidelines	ET.12
<b>Power &amp; Data Planning</b>	ET.13
Overview	ET.13
Product Information	ET.14
Standard 8-Wire System	ET.17
Cable Management	ET.18
<b>Pricing</b>	ET.19
Panels	ET.19
Connectors & Trim	ET.25
Adjustable-Height Brackets	ET.30
Power & Data	ET.32
<b>Surface Materials</b>	ET.36
Paint	ET.36
Textiles	ET.37
COM	ET.38

# Kimball

# ETARRAN™ PANEL SYSTEM

Panels, Connectors, & Trim

Statement of Line

Statement of Line	➤ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



### Tackable Fabric Panels

- See page ET.5 for product info.
- See pages ET.19–ET.20 to specify.



### Stackable Fabric Panels

- See page ET.6 for product info.
- See page ET.21 to specify.



### Stackable Glass or Resin Panels

- See page ET.6 for product info.
- See page ET.22 to specify.



### Frameless Glass & Resin

- See page ET.7 for product info.
- See page ET.23 to specify.




### Hinged Doors

- See page ET.8 for product info.
- See page ET.24 to specify.



### End Trim

- See page ET.11 for product info.
- Standard, see page ET.25 to specify.
- Stackable, see page ET.27 to specify.




### X Connector (4-way)

- See pages ET.9–ET.10 for product info.
- Standard, see page ET.25 to specify.
- Stackable, see page to specify.



### L Connector (90°)

- See pages ET.9–ET.10 for product info.
- Standard, see page ET.26 to specify.
- Stackable, see page ET.28 to specify.



### T Connector (3-way)

- See pages ET.9–ET.10 for product info.
- Standard, see page ET.26 to specify.
- Stackable, see page ET.28 to specify.



### W Connector (Wall Mount)

- See pages ET.9–ET.10 for product info.
- Standard, see page to specify.
- Stackable, see page to specify.



### Panel-to-Panel Hi-Lo Trim Kits

- See page ET.11 for product info.
- Standard, see page ET.29 to specify.
- Stackable, see page to specify.



### Connector-to-Panel Hi-Lo Trim Kits

- See page ET.11 for product info.
- Standard, see page ET.29 to specify.



### Xside Height-Adjust to Panel Bracket

- See page ET.30 to specify.




### Accessory Rail

- See page ET.31 to specify.

**ETARRAN™** PANEL SYSTEM  
Power & Data

Statement of Line

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



**Power Distributions**

- ▶ See page ET.14 for product info.
- ▶ See page ET.32 to specify.



**Jumper Cables**

- ▶ See page ET.14 for product info.
- ▶ See page ET.32 to specify.



**Duplex Receptacles**

- ▶ See page ET.14 for product info.
- ▶ See page ET.33 to specify.




**Power Entries**

- ▶ See page ET.15 for product info.
- ▶ See page ET.34 to specify.



**Ceiling Power Pole**

- ▶ See page ET.15 for product info.
- ▶ See page ET.34 to specify.




**New York City Power Entries**

- ▶ See page ET.16 for product info.
- ▶ See page ET.34 to specify.



**Hardwire Box Assemblies**

- ▶ See page ET.16 for product info.
- ▶ See page ET.34 to specify.



**Communication Wireway Covers**

- ▶ See page ET.16 for product info.
- ▶ See page ET.34 to specify.

# ETARRAN™ PANEL SYSTEM

## Overview

## Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

**Top caps** are attached by pressure fit on top of panels; they are painted metal and feature a flat profile.

**Stackable panels and connectors** can be stacked one or two high up to 80"H.

**Panel-to-panel connections and panel-to-connector connections** are achieved through use of a bolt and bolt and receiver.

**Vertical slotted tubes** on the panels provide slots at 32mm increments for vertical positioning of components.

**Wireway covers** (2 per panel) have two punch-outs for receptacles. Punch-out covers are included for openings that won't be used.

**Hooks** on panels and connectors allow toolless connection at the bottom of the panel.


**Universal connector top caps**, included with connectors, finish the top of a panel connection. The painted metal top cap pressure fits into place.

**Connectors and stackable connectors** are available to join two or more panels when changing directions in a panel run (T-connector shown; L and X connectors are also available).

**End trims** finish the end of a panel run; they are painted metal.

**Panels** are 2½" thick. Fiberglass core is covered in the selected vertical textile and adhered to both sides of the 1¼" metal frame.

**Wireways** allow cable routing through the panel base and holds power distribution assemblies in powered panels.

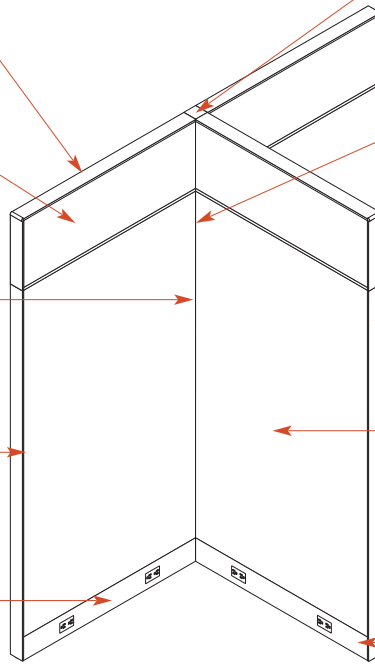

### Top Cap Profiles:



Flat (F)

### Electrical:



**Class A**—Tackable fabric, PET, and glass

# ETARRAN™ PANEL SYSTEM

## Panels

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36


### Details



**Tackable vertical textile panels** are 2½" thick. Fiberglass core is covered in the selected vertical textile and adhered to both sides of the 1¼" metal frame.

**Panels include:**

- Top cap
- Two punched wireway covers with punch-out covers
- Power distribution assembly, if powered panel is specified
- Attachment brackets



**Vertical metal tubes** in panels provide slots at 32mm increments for vertical positioning of components starting at 14½" (or 368 mm) from the bottom of the panel to the top of the panel.

### Surface Materials

#### Panels

- Kimball vertical textiles
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

▶ See the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com) for complete information regarding U.L. approval procedures.

#### Top Caps

- Metal: paint


#### Wireway Covers

- Metal: paint

### Acoustical Ratings

- NRC rating = .7
- STC rating = 8

### Connections



**Connectors** are available in L, T, and X (shown) models to join panels when changing directions in a panel run.

Connectors are constructed of painted steel.

▶ See page ET.9.




**Stackable panels** can be added to the to increase the height of base panel or create a hi-lo transition.

▶ See page ET.6.

### Power distribution assembly,

factory-installed in the base wireway powered panels, allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels.

▶ See page ET.14.



**Punched wireway covers** are standard with each panel. Each cover has two 1½" H x 2½" W cut-outs.

### Planning Factors

**Selected paint color** will be applied to top cap and wireway covers.

**Selected vertical textile** will apply to both sides of the panel.

### Related Products

**Electrical in-feeds, jumper cables, and receptacles** must be specified separately.

▶ See pages ET.32– ET.34.

**Communication wireway covers** must be specified separately. Cutouts for data ports are 1⅜" H x 2½" W.


▶ See page ET.34.

**Traxx and tiles** are available to integrate wall-mount applications with panel applications.

▶ See *Traxx & Tiles* chapter in the *Kimball Systems Solutions Price List*.



**Xsede height-adjust bracket** is available to attach to the leg of Xsede height-adjustable base and connects to slots in the Etarran panel to stabilize the panel run.



**Etarran accessory rails** are available to attach to a same-width panel; rails accept metal or plastic work tools.

▶ See *Perks Work Tools* chapter in the *Kimball Accessory Solutions Price List*.

# ETARRAN™ PANEL SYSTEM

## Stackable Panels

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details



**Stackable panels** are available in vertical textile, clear glass, or frosted resin. Stackable panels are for use with any standard Etarran panel to accommodate height changes up to 80"H. Models include:

- Panel
- Attachment brackets

*Note: Top cap from base panel will be used on stacking unit.*

**Heights available** include 12" and 18". Specify appropriate stackable panel to increase the height of workstation.

**12"H models** allow transitioning from one base height to the next taller base height (e.g., from 30" to 42"H, 42" to 54"H, 54" to 68"H, or 68" to 80" (including the 80"H door panel).

**Stackable vertical textile panels** feature a welded metal frame with two 1 1/4" vertical metal tubes, a 16-gauge horizontal channel, vertical textile over fiberglass core that are adhered to both sides of the frame.

**Stackable vertical textile panels are loadbearing;** they will support overheads when used according to application guidelines.

▶ See page ET.12.



**Stackable glass panels** are constructed of 1 1/4" vertical steel tubes, extruded aluminum and steel frames, and clear tempered glass.



**Stackable resin panels** are constructed of 1 1/4" vertical steel tubes, extruded aluminum and steel frames, and frosted (Glacier) resin.

### Surface Materials

#### Stackable Vertical Textile Panels

- Kimball vertical textiles
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

▶ See the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com) for complete information regarding U.L. approval procedures.


#### Stackable Glass Panels

- Glass: clear
- Frames: paint

#### Stackable Resin Panels

- Resin: frosted (Glacier)
- Frames: paint

### Connections



**A maximum of two stackable panels** can be stacked on a standard panel. Maximum panel height with stackable panels is 80".

**Stackable vertical textile panels are loadbearing** and will support overheads when used according to guidelines.

▶ See page ET.12 for panel run rules.

**Stackable glass and stackable resin panels** do not accept overheads or accessory rails.

### Planning Factors

▶ See page ET.12 for additional application guidelines for stackable panels.

**Stackable panels may be installed on any standard Etarran panel,** without disassembling the existing panel run.

**Stackable panels must be the same width** as the panel they will be stacked above.

## ETARRAN™ PANEL SYSTEM

### Frameless Glass

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	

#### Details




**Frameless glass** is clear, 1/4" tempered glass pane with polished edges. Model includes:

- Glass pane
- Top cap
- Mounting blocks

**Frameless resin** is frosted (Glacier), resin pane. Model includes:

- Resin pane
- Top cap
- Mounting blocks



**Glass or resin pane** sits inside the top cap and panel frame when installed and extends 12 1/2" above the top cap. Adjacent frameless glass models are designed to be offset from one another with a 1 1/8" gap. The inset accounts for hi-lo applications, eliminating need for different size

**When used in a hi-lo application,** the top of the frameless glass or resin pane will be flush with the top of the adjacent panel's top cap.

**U.L. Listing** 1286

#### Surface Materials

##### Frameless Glass

- Glass: clear
- Top cap: paint

##### Frameless Resin

- Resin: frosted (Glacier)
- Top cap: paint

#### Connections



**Flat profile top cap,** standard with frameless glass or frameless resin model, is slotted to allow the pane to fit down into the panel frame's mounting blocks to hold the panel securely.

#### Planning Factors

**Frameless glass and frameless resin is not loadbearing.** Hanging components or accessories on frameless glass is not recommended.

**Frameless glass and frameless resin cannot be scribed** in the field.

**Frameless glass and frameless resin cannot span more than one panel** and must be the same width as the panel to which it is attached.

**Etarran frameless glass and frameless resin models** cannot be used on other Kimball panel systems.


# ETARRAN™ PANEL SYSTEM

## Hinged Doors

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details



**Locking lever** is standard and is suitable for ADA guidelines.

**Door opening width** for the 36"W door is 31<sup>1</sup>/<sub>4</sub>"; for the 42"W door it is 37<sup>1</sup>/<sub>4</sub>". Opening height is 76<sup>1</sup>/<sub>2</sub>". 42"W hinged doors are recommended for ADA compliance.

**Hinged doors** are available 36" or 42"W (nominal). All models include:

- Frame and threshold
- Top cap
- Full-length hinge
- Frame gasket
- Attachment brackets

**Hinged doors** are 80"H. They feature a welded frame with painted metal extrusion, painted steel threshold, and a painted MDF door.

**Full-length hinge** is used for strength and durability.

**Frame gasket** protects the door when closing and quiets closure.

### Surface Materials

#### Door

- Paints (excluding metallics)

#### Door Frame


- Paint

#### Top Cap

- Paint

### Planning Factors

**Hinged doors** are recommended for placement next to a connector.



**Maximum panel run** when using doors is 12' or 3 panels. Panels must be supported on both ends.

**IMPORTANT:** Hinged doors cannot be used in unsupported panel runs.



# ETARRAN™ PANEL SYSTEM


## Connectors

## Planning


Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details


**Connectors** are available to join two or more panels when changing directions in a panel run.



X (4-way 90°)



L (2-way 90°)



T (3-way 90°)

**Connectors** can be used in the following configurations:

- X (4-way 90°)
- L (2-way 90°)
- T (3-way 90°)
- Wall mount

**Connector models** include:

- Connector
- Top cap
- Connection bracketry

**Connector top caps** are metal and will be painted the same color as selected for the connector.

**Stackable connectors** are available for use with stackable panels.

▶ See page ET.10.

### Surface Materials

#### Connectors and Stackable Connectors

- Paint

#### Connector Top Caps

- Paint

### Power & Data

**Power and data** can be routed through connectors at the base.

▶ See page ET.18 for cable management information.

### Planning Factors

**Specify appropriate connectors** for the combined height of standard and stackable panels. Base connector must always be the same height or taller than any adjacent standard panel.

**Allow for connector thickness** when space planning.

- Connectors are 2½" thick.
- Wall-mount connectors are 2½" thick.

**Thickness of the wall-mount connector** does not correspond to Traxx. Wall-mount connectors have no adjustability for out-of-plumb walls; shimming may be required.


# ETARRAN™ PANEL SYSTEM

## Stackable Connectors

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details



**Stackable connectors** are available to join panels when changing directions in a panel run with stackable panels.

#### Stackable connector models include:

- Connector
- Connection bracketry

*Note: Top caps are not included. Top cap from base connector will be used.*

**Stacking connectors** are constructed of painted metal. Stacking connectors are available in 3 heights: 12", 18", or 24"H.

### Surface Materials

#### Stackable Connectors

- Paint

### Connections

**Connectors** can be used in the following configurations:

- X (4-way 90°)
- L (2-way 90°)
- T (3-way 90°)
- Wall mount

### Planning Factors


#### Allow for connector thickness

when space planning.

- Connectors are 2½"D.
- Wall-mount connectors are ¾"D and 2½"W.

#### Specify appropriate connectors

for the combined height of standard and stackable panels. Base connector or base and stacking connectors must always be the same height or taller than any adjacent standard panel.



**Specify stackable connectors** to equal each stackable panel height. Provides the most flexibility for reconfiguration.

# ETARRAN™ PANEL SYSTEM

## Trim


Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details



**End trim** is  $\frac{3}{8}$ " thick and covers the vertical panel edge at the end of a panel run.



**Panel-to-panel or connector-to-panel hi-lo trim** is available to finish off the vertical end of panels within a run with transitioning heights.

### Surface Materials


#### End Trim

- Paint

#### Hi-Lo Trim

- Paint

### Connections



**Overheads** cannot be hung in a row of stackable panels where a hi-lo trim kit is used. They may be hung in a row beneath the hi-lo application.

### Planning Factors

**Specify end trim for the combined height** of panels and stackable panels or use stacking end trim with base end trim to equal overall weight.


**For hi-lo applications**, specify hi-lo trim to match the height of the drop.  
*Note: Hi-lo trim for stackable panels are determined the same way as for standard panels.*

# ETARRAN™ PANEL SYSTEM

## Application Guidelines for Panel Runs

Planning


Statement of Line	➤ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36




**Minimum wing widths apply** to a freestanding "C" station that does not have support from a panel run or a wall connector at either end.

**Width of the wing panel or run** increases according to height of the spine run.

➤ See chart for minimum wing width.




**Maximum panel run for unsupported panels** (those not attached to a wall, wing panel, or floor support on BOTH ends) is 2 panels with a maximum run of 8'.



**Maximum panel run for supported panels** (those supported with a wall or panel run on one end and a **same-height or shorter wing panel** on the other) is 3 panels with a maximum run of 12'. The width of the wing wall increases according to height.


➤ See chart for minimum wing width.



**Overhead cabinets** may be hung on the inside of the panel system on a maximum of three panels no greater than 12'. For proper support, a wing panel or wall mount must be adjacent to both ends of any run of overheads.

*Note: Overhead must be ganged to assure maximum rigidity.*

**Panel run rules are the same for stackable panels** as for standard Etarran panels.




**Only two stackable panels** may be stacked above a standard panel to a maximum height of 80'.

**Stackable panels must be the same width** as the panel they will be stacked above.

**Stackable panel runs** must have a wing panel that is equal to the combined height of the base panel plus the stackable panels, on at least one end for support.

**Stackable fabric panels are load-bearing** and will support overheads when used to the following guidelines.



**Overheads** cannot be hung in a row of stackable panels where hi-lo trim is used. They may be hung in a row beneath the hi-lo application.

**Overheads** cannot be hung above 80"H or on a stackable wing wall.

**Frameless glass or frameless resin** does not affect application guidelines.

### Definitions:

**Unsupported panel runs:** Runs not attached on BOTH ends to a wall, panel run, or floor support.

**Floor support:** Undersurface storage units, support panels, or column legs

**Balanced back-to-back:** Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

### Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run to eliminate the possibility of tipping or injury under standard loading and usage.

Height of Spine Run	Minimum Wing Width
30" or 42"H	24"
48" or 54"H	30"
68" or 80"H	42"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run, except in free-standing "C" applications, or 80"H supported runs.

# ETARRAN™ PANEL SYSTEM

## Power and Data Overview

### Planning


Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

**Etarran panel system** offers an 8-wire system.

**Building-to-panel electrical connections** can be accomplished whether power is sourced in the wall, floor, or ceiling.

**Communication cables** may be routed through the base.

**Power distribution assembly** carries power to receptacles. They are factory installed on powered panels; they can be field installed on non-powered panels.

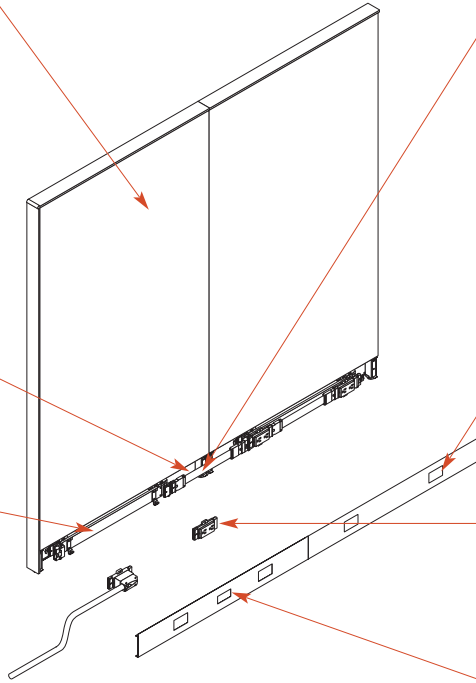

**Electrical jumper cables** are used to pass power from panel to panel and through directional connectors. Models are specified based on the panel configuration.  
▶ See page ET.32 or for details.

**Wireway cover** is 4<sup>3</sup>/<sub>16</sub>"H x 1/2"D.

**Duplex opening in wireway cover** provides access to duplex receptacles. Openings are located 9" from the panel reveal to the center of the opening.

**Receptacles** are inserted into the power distribution assembly and secured with screws. Up to 4 duplex receptacles may be specified for each base panel.

**Communication wireway cover** has an additional window for communication ports.  
▶ See page ET.18 for cable management application guidelines.

### Punch Dimensions:

Receptacle cutouts—  
2<sup>15</sup>/<sub>16</sub>"W x 1<sup>15</sup>/<sub>16</sub>"H

Hardwire cutouts—  
2<sup>1</sup>/<sub>16</sub>"W x 1<sup>7</sup>/<sub>16</sub>"H

Data port cutouts—  
2<sup>1</sup>/<sub>16</sub>"W x 1<sup>3</sup>/<sub>8</sub>"H


# ETARRAN™ PANEL SYSTEM

Power Distribution | Assemblies, Jumpers, and Receptacles

Planning

Statement of Line	➤ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

## Details




**Duplex receptacles** are rated at 15 amps and may be installed back-to-back in base and mid-wireways.

**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power distribution assembly can also be field-installed on non-powered panels.

**Up to four duplex receptacles** (two per side) can be installed in each base wireway.

**Two wiring configurations** are possible utilizing the same components. ➤ See page ET.17 for planning and installation guidelines.

## Connections

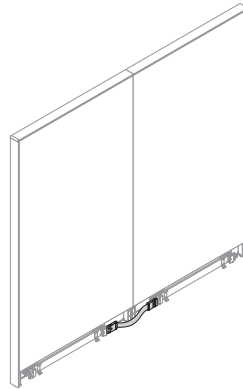

**Jumper cables** are used to pass power from panel to panel.

## Planning Factors

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Hardwire electrical components** for use in the base wireway are available for areas where local codes do not accept modular electrical plug-in components. ➤ See page ET.16.

**New York City electrical applications** require a special power entry. Panels should be specified as non-powered and electrical distribution assemblies should be specified separately. ➤ See page ET.16.

## Base Wireway Jumpers Connection Guidelines:

### Straight-Line Connections:



**81PEJ18**  
Panel to panel



**81PEJ58**  
Through a connector

### 90° Connections:



**81PEJ28**  
Through a connector


# ETARRAN™ PANEL SYSTEM

## Power Entries

Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details



**Floor power entry** is available to bring power to the panel run from the floor or wall.



**Ceiling power entry assembly** is available to bring power to the panel run from the ceiling. It is used in conjunction with ceiling power pole.

### Planning Factors

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Access to ceiling power source** is regulated by National Code to a maximum of 12 ft. conduit.

**Floor power entries** will take up the space of one receptacle location on the power distribution assembly.

**Ceiling power entries** plug into the end of a power distribution assembly, utilizing one of the two jumper connection locations on one end of the power distribution assembly.

### Related Products

**Hardwire electrical components** are available for areas where local codes do not accept modular electrical plug-in components.  
▶ See page ET.16.

**New York City electrical applications** require a New York City power assembly for the panel where power entry is made.  
▶ See page ET.16.

# ETARRAN™ PANEL SYSTEM

## Hardwire and New York City Components

Planning


Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### Details

**Non-powered panels** should be specified when planning to hardwire electrical.




**Hardwire box**, specified separately, is required for each panel that will receive field-installed hardwired electrical.



**Cover plates** are included; available in Cinder or White.

**Hardwire cover plate** for power provides an access hole that is sized to fit a Rayco Sierra receptacle (for compatible size and type).



**New York City electrical applications** require a special power entry. Panels should be specified as non-powered; power distribution assemblies should be specified separately.

### Connections

**Installations** must be completed by a qualified electrician or an electrical engineer familiar with the National Electrical Code and the appropriate local codes.

### Planning Factors

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.




# ETARRAN™ PANEL SYSTEM


## Circuit Configurations | 8-Wire Electrical System

### Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



**Etarran 8-wire, 4-circuit system** supports work environments having light- to medium-intensity computerized equipment needs. The 8-wire systems include two 12-gauge ground wires, two 10-gauge neutral wires, and four 12-gauge hot wires.



**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power distribution assemblies can be field-installed on non-powered panels. ▶ See page ET.14.

**Two wiring configurations** are possible—3 and 1 or 2 and 2—utilizing the same components. ▶ See wiring configurations at right.

**Building-to-panel electrical connections** can be accomplished from power sources in the wall, floor, or ceiling. ▶ See page ET.15.


**Duplex receptacles** used for both types of configurations are the same. This simplifies specifications and allows a faster understanding of the system. ▶ See page ET.14.

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Installations** should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment.

**All components** are shipped with hardware necessary for installation.

### 3 and 1 (8-wire):

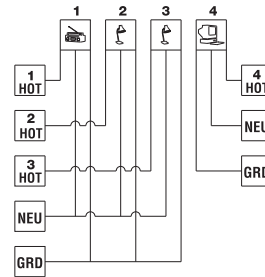


- Three utility circuits share a neutral and common ground.
- One circuit with a DEDICATED hot, neutral and ground.
- Utilize Cetra receptacles #1, 2, 3 for utility and #4 for the DEDICATED ground circuit.

Circuits 1, 2, and 3 can be used for general electrical needs. Customarily, one or more of the circuits is reserved for lighting or other everyday uses, which allows control by central or master switching.

Circuit 4 consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

### 2 and 2 (8-wire):



- Two DESIGNATED utility circuits and two DESIGNATED computer circuits.
- Utilize Cetra receptacles #1 and #2 for the designated utility circuits and receptacles #4 and #5 for the designated computer circuits.

*Note: Receptacle #3 cannot be used in the 2 and 2 configuration. If receptacle #3 is used, possible cross feed or interference from utility circuits one and two can be introduced to computer circuits.*

Circuits 1 and 2 provide a pair of designated circuits for general electrical needs, as described for the 3 & 1.

Circuits 4 and 5 provide a pair of designated circuits for computer applications.

### Approval/Compliance:

Etarran's electrical system is UL approved, complies with the National Electrical Code (NEC), and is certified for electrical safety to Canadian Standards Association (CSA) standard C22.1 No. 203. *Note: Any field modification of the electrical components voids the UL listing.*

### Electrical Service:

Etarran's 8-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection.

# ETARRAN™ PANEL SYSTEM

## Cable Management


## Planning

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36


**Communication and data cables** can be routed through base wireways.

**Communication wireway covers** for 30"W or wider panels are available. They are pre-punched to accept data access ports. Only one data opening per wireway cover is available. Opening is 1 3/8"H x 2 1/16"W.


**When purchasing ports commercially**, verify that the depth of port and size of cover are applicable for proper fit. Data ports can be purchased through the port manufacturer or their distribution network.



**Cable capacity when routing behind wireway covers and straight through an X connector** is 1.18 square inches per side (15 1/4"-diameter cables at 60% fill; 30 total for both sides). When using jumper cable, capacity is 12 1/4"-diameter cables on the side with jumper.



**Cable capacity when using communication cables** is 1.18 square inches through connectors (15 1/4"-diameter cables at 60% fill). When combining electrical and communication cables, capacity is .99 square inch through L- and T-connectors (12 1/4"-diameter cables at 60% fill).



**Power poles that connect to L, T, or X connectors** provide 3 square inches (38 1/4"-diameter cables at 60% fill). When combining ceiling power entry and communication cables, capacity is 2.66 square inches (32 1/4"-diameter cables at 60% fill).

**For maximum capacity**, it is recommended to install the power/data pole in the center of the station so data cables can be routed in multiple directions. If greater capacity is required, a second pole/data pole can be specified.

# ETARRAN™ PANEL SYSTEM

Panels | 30", 42", and 48"H



## Pricing

GSA SIN Pending | COM GSA Non-Contract

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

D	W	H	Model	POWERED			NON-POWERED			Shipping	
				Textile Price Grade			Textile Price Grade			lbs.	Cubic Feet
				AA	A	B/COM	AA	A	B/COM		
<b>30"H Panels</b>											
2 1/2"	24"	29 57/64"	<b>81P2430A</b>	\$580	\$617	\$684	\$464	\$501	\$568	10.96	1.30
	30"		<b>81P3030A</b>	648	694	778	518	564	648	12.44	1.60
	36"		<b>81P3630A</b>	711	766	867	572	627	728	13.93	1.90
	42"		<b>81P4230A</b>	776	836	945	625	685	794	16.42	2.30
	48"		<b>81P4830A</b>	839	908	1034	679	748	874	17.91	2.60
	60"		<b>81P6030A</b>	1004	1087	1238	827	910	1061	20.89	3.20
<b>42"H Panels</b>											
2 1/2"	24"	42 31/64"	<b>81P2442A</b>	\$629	\$666	\$733	\$513	\$550	\$617	13.34	1.90
	30"		<b>81P3042A</b>	700	746	830	570	616	700	16.42	2.30
	36"		<b>81P3642A</b>	766	821	922	627	682	783	18.50	2.70
	42"		<b>81P4242A</b>	835	895	1004	684	744	853	20.59	3.20
	48"		<b>81P4842A</b>	901	970	1096	741	810	936	22.67	3.60
	60"		<b>81P6042A</b>	1078	1161	1312	901	984	1135	27.85	4.50
<b>48"H Panels</b>											
2 1/2"	24"	48 25/32"	<b>81P2448A</b>	\$656	\$693	\$760	\$540	\$577	\$644	24.19	2.10
	30"		<b>81P3048A</b>	727	773	857	600	646	730	26.68	2.60
	36"		<b>81P3648A</b>	798	853	954	660	715	816	29.54	3.10
	42"		<b>81P4248A</b>	869	929	1038	720	780	889	32.22	3.60
	48"		<b>81P4848A</b>	940	1009	1135	780	849	975	35.89	4.10
	60"		<b>81P6048A</b>	1115	1198	1349	938	1021	1172	41.25	5.10

Specify electrical jumper cables and receptacles separately.  
▶ See pages ET.32–ET.33.

Communication Wireway Cover  
▶ See page ET.34 .

### Standard Includes

- Panel: vertical textile with a fiber-glass core
- Top cap: metal
- Wireway covers: metal
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered
- 3 Top cap material:  
P = Paint  
F = Flat
- 4 Top cap profile:  
F = Flat
- 5 Paint price group:  
STD = Group 1/Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 6 Paint designator
- 7 Wireway cover punch option  
P2 = 2 punched covers
- 8 Vertical textile grade
- 9 Vertical textile number

**ETARRAN™ PANEL SYSTEM**  
Panels | 54" and 68"H

Pricing

GSA SIN Pending | COM GSA Non-Contract

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Dimensions <i>D W H</i>	Model <i>Model</i>	POWERED			NON-POWERED			Shipping	
		Textile Price Grade			Textile Price Grade			lbs.	Cubic Feet
		AA	A	B/COM	AA	A	B/COM		
<b>54"H Panels</b>									
2 1/2" 24" 55 5/64"	<b>81P2454A</b>	\$678	\$715	\$782	\$562	\$599	\$666	16.72	2.40
30"	<b>81P3054A</b>	749	795	879	622	668	752	19.40	2.90
36"	<b>81P3654A</b>	821	876	977	683	738	839	22.08	3.50
42"	<b>81P4254A</b>	892	952	1061	743	803	912	25.76	4.10
48"	<b>81P4854A</b>	963	1032	1158	803	872	998	28.44	4.60
60"	<b>81P6054A</b>	1152	1235	1386	975	1058	1209	33.80	5.80
<b>68"H Panels</b>									
2 1/2" 24" 67 43/64"	<b>81P2468A</b>	\$723	\$760	\$827	\$607	\$644	\$711	19.50	2.90
30"	<b>81P3068A</b>	790	836	920	660	706	790	23.88	3.60
36"	<b>81P3668A</b>	862	917	1018	723	778	879	27.25	4.30
42"	<b>81P4268A</b>	937	997	1106	786	846	955	30.63	5.00
48"	<b>81P4868A</b>	1009	1078	1204	849	918	1044	34.00	5.70
60"	<b>81P6068A</b>	1226	1309	1460	1049	1132	1283	41.75	7.10

**Standard Includes**

- Panel: vertical textile with a fiber-glass core
- Top cap: metal
- Wireway covers: metal
- Power distribution assembly, if powered panel is selected
- Attachment brackets

**How to Specify**

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered
- 3 Top cap material:  
P = Paint  
F = Flat
- 4 Paint price group:  
STD = Group 1/Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 5 Paint designator
- 7 Wireway cover punch option  
P2 = 2 punched covers
- 8 Vertical textile grade
- 9 Vertical textile number

Specify electrical jumper cables and receptacles separately.  
▶ See pages ET.32–ET.33.

Communication Wireway Cover  
▶ See page ET.34 .

**ETARRAN™** PANEL SYSTEM  
Stackable Panels | Vertical Textile

Pricing

GSA SIN Pending | COM GSA Non-Contract

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



<i>Dimensions</i>			<i>Model</i>		<i>Vertical Textile Price Grade</i>				<i>Shipping</i>		
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>AA</i>	<i>A</i>	<i>B/COM</i>	<i>AA</i>	<i>A</i>	<i>B/COM</i>	<i>lbs.</i>	<i>Cubic Feet</i>
<b>12"H Stackable Panels</b>											
2 1/2"	24"	13 29/32"	<b>81P2412FS</b>			\$327	\$364	\$431		10.02	0.70
	30"		<b>81P3012FS</b>			354	400	484		11.68	0.80
	36"		<b>81P3612FS</b>			379	434	535		14.25	1.00
	42"		<b>81P4212FS</b>			404	464	573		15.90	1.10
	48"		<b>81P4812FS</b>			430	499	625		17.66	1.20
	60"		<b>81P6012FS</b>			482	565	716		21.98	1.50
<b>18"H Stackable Panels</b>											
2 1/2"	24"	20 7/32"	<b>81P2418FS</b>			\$407	\$444	\$511		11.58	0.90
	30"		<b>81P3018FS</b>			434	480	564		14.39	1.10
	36"		<b>81P3618FS</b>			459	514	615		16.22	1.30
	42"		<b>81P4218FS</b>			484	544	653		18.03	1.60
	48"		<b>81P4818FS</b>			510	579	705		19.86	1.80
	60"		<b>81P6018FS</b>			562	645	796		24.49	2.20

**Standard Includes**

- Panel: vertical textile with a fiber-glass core

**How to Specify**

- ① Model
- ② Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator
- ④ Vertical textile grade
- ⑤ Vertical textile number

**ETARRAN™** PANEL SYSTEM  
Stackable Panels | Glass or Resin

Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



<i>Dimensions</i>			<i>Model</i>	<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Stackable Glass Panels</b>						
2 1/2"	24"	13 <sup>29/32</sup> "	<b>81P2412GS3P</b>	\$533	15.88	0.70
	30"		<b>81P3012GS3P</b>	570	18.84	0.80
	36"		<b>81P3612GS3P</b>	629	22.72	1.00
	42"		<b>81P4212GS3P</b>	717	25.60	1.10
	48"		<b>81P4812GS3P</b>	768	27.71	1.20
	60"		<b>81P6012GS3P</b>	886	35.00	1.50
2 1/2"	24"	20 <sup>7/32</sup> "	<b>81P2418GS3P</b>	693	20.74	0.90
	30"		<b>81P3018GS3P</b>	741	25.45	1.10
	36"		<b>81P3618GS3P</b>	818	29.16	1.30
	42"		<b>81P4218GS3P</b>	932	32.87	1.60
	48"		<b>81P4818GS3P</b>	998	36.58	1.80
	60"		<b>81P6018GS3P</b>	1152	45.01	2.20
<b>Stackable Resin Panels</b>						
2 1/2"	24"	13 <sup>29/32</sup> "	<b>81P2412RS9P</b>	\$560	15.88	0.70
	30"		<b>81P3012RS9P</b>	599	18.84	0.80
	36"		<b>81P3612RS9P</b>	660	22.72	1.00
	42"		<b>81P4212RS9P</b>	753	25.60	1.10
	48"		<b>81P4812RS9P</b>	806	27.71	1.20
	60"		<b>81P6012RS9P</b>	930	35.00	1.50
2 1/2"	24"	20 <sup>7/32</sup> "	<b>81P2418RS9P</b>	728	20.74	0.90
	30"		<b>81P3018RS9P</b>	778	25.45	1.10
	36"		<b>81P3618RS9P</b>	859	29.16	1.30
	42"		<b>81P4218RS9P</b>	979	32.87	1.60
	48"		<b>81P4818RS9P</b>	1048	36.58	1.80
	60"		<b>81P6018RS9P</b>	1209	45.01	2.20

**Standard Includes**

- Panel frame: metal
- Pane: Clear glass or frosted resin

**How to Specify**

- ① Model
- ② Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator
- ④ Resin color (if applicable):  
**26** = Glacier

**ETARRAN™** PANEL SYSTEM  
Frameless | Glass or Resin

Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Dimensions			Model	Price	Shipping	
D	W	H			lbs.	Cubic Feet
<b>Frameless Glass</b>						
2 1/2"	24"	13 25/32"	<b>81P2412FG3</b>	\$370	9.97	1.10
	30"		<b>81P3012FG3</b>	400	9.97	1.10
	36"		<b>81P3612FG3</b>	430	15.52	1.50
	42"		<b>81P4212FG3</b>	460	17.02	1.70
	48"		<b>81P4812FG3</b>	490	18.88	2.00
	60"		<b>81P6012FG3</b>	550	23.80	2.40
2 1/2"	24"	20 3/32"	<b>81P2418FG3</b>	410	12.96	1.40
	30"		<b>81P3018FG3</b>	450	16.60	1.70
	36"		<b>81P3618FG3</b>	490	19.12	2.00
	42"		<b>81P4218FG3</b>	530	22.64	2.30
	48"		<b>81P4818FG3</b>	560	26.30	2.60
	60"		<b>81P6018FG3</b>	630	32.96	3.20
<b>Frameless Resin</b>						
2 1/2"	24"	13 25/32"	<b>81P2412FR9</b>	\$400	9.97	1.10
	30"		<b>81P3012FR9</b>	456	12.07	1.30
	36"		<b>81P3612FR9</b>	495	15.52	1.50
	42"		<b>81P4212FR9</b>	525	17.02	1.70
	48"		<b>81P4812FR9</b>	555	18.88	2.00
	60"		<b>81P6012FR9</b>	650	23.80	2.40
2 1/2"	24"	20 3/32"	<b>81P2418FR9</b>	445	12.96	1.40
	30"		<b>81P3018FR9</b>	504	16.60	1.70
	36"		<b>81P3618FR9</b>	565	19.12	2.00
	42"		<b>81P4218FR9</b>	615	22.64	2.30
	48"		<b>81P4818FR9</b>	660	26.30	2.60
	60"		<b>81P6018FR9</b>	730	32.96	3.20

**Standard Includes**

- Pane: clear glass or frosted resin
- Top cap: metal
- Mounting blocks

**How to Specify**

- ① Model
- ② Top cap profile:  
**F** = Flat
- ③ Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ④ Paint designator
- ⑤ Resin color (if applicable):  
**26** = Glacier

**ETARRAN™** PANEL SYSTEM  
Hinged Doors



Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

<i>Dimensions</i>			<i>Model</i>	<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Hinged Left</b>						
21½"	36"	80¾/32"	<b>81P3680DLP</b>	\$2375	80.50	11.80
	42"		<b>81P4280DLP</b>	2575	87.40	13.40
<b>Hinged Right</b>						
21½"	36"	80¾/32"	<b>81P3680DRP</b>	\$2375	80.50	11.80
	42"		<b>81P4280DRP</b>	2575	87.40	13.40

**Standard Includes**

- Frame: metal
- Door: painted MDF
- Door lever
- Top cap
- Attachment hardware

**How to Specify**

- 1 Model
- 2 Top cap profile:  
F = Flat
- 3 Paint price group:  
STD = Group 1/Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 4 Paint designator

Specify the hinge location (right or left) so that the door will swing in the correct direction. With a right hinge, door will swing away from you to the right; with a left hinge, door will swing away from you to the left.

42"W hinged doors are recommended for ADA compliance.



**ETARRAN™** PANEL SYSTEM  
End Trim



Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

<i>Dimensions</i>			<i>Model</i>	<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>End Trim</b>						
3/8"	2 1/2"	29 7/16"	<b>81P30ETP</b>	\$118	1.72	0.04
		42 1/32"	<b>81P42ETP</b>	121	2.46	0.06
		48 1 1/32"	<b>81P48ETP</b>	128	2.82	0.07
		54 5/8"	<b>81P54ETP</b>	131	3.16	0.08
		67 7/32"	<b>81P68ETP</b>	134	3.86	0.09
		79 27/32"	<b>81P80ETP</b>	141	4.56	0.11

**Standard Includes**

- End trim: metal
- Attachment hardware

**How to Specify**




- 1 Model
- 2 End trim profile:  
F = Flat
- 3 Paint price group:  
STD = Group 1/Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 4 Paint designator

**ETARRAN™** PANEL SYSTEM  
Connectors

Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Dimensions			Model	Price	Shipping	
D	W	H			lbs.	Cubic Feet
<b>X Connectors (4-Way)</b>						
2 1/2"	2 1/2"	29 5/16"	81P30CXPP	\$180	6.04	0.30
		42 31/64"	81P42CXPP	191	8.31	0.40
		48 25/32"	81P48CXPP	213	9.43	0.40
		55 2/32"	81P54CXPP	220	10.56	0.40
		67 43/64"	81P68CXPP	235	13.81	0.50
		80 9/32"	81P80CXPP	257	16.08	0.60
<b>L Connectors (2-Way)</b>						
2 1/2"	2 1/2"	29 5/16"	81P30CLPP	\$164	6.18	0.30
		42 31/64"	81P42CLPP	175	8.46	0.40
		48 25/32"	81P48CLPP	197	9.60	0.40
		55 2/32"	81P54CLPP	204	10.73	0.40
		67 43/64"	81P68CLPP	219	14.00	0.50
		80 9/32"	81P80CLPP	241	16.28	0.60
<b>T Connectors (3-Way)</b>						
2 1/2"	2 1/2"	29 5/16"	81P30CTPP	\$177	6.13	0.30
		42 31/64"	81P42CTPP	188	8.41	0.40
		48 25/32"	81P48CTPP	210	9.54	0.40
		55 2/32"	81P54CTPP	217	10.67	0.40
		67 43/64"	81P68CTPP	232	13.93	0.50
		80 9/32"	81P80CTPP	254	16.20	0.60
<b>W Connectors (Wall-Mount)</b>						
3/8"	2 1/2"	29 5/16"	81P30WBP	\$117	1.73	0.04
		42 31/64"	81P42WBP	120	2.48	0.06
		48 25/32"	81P48WBP	126	3.17	0.07
		55 2/32"	81P54WBP	132	2.84	0.08
		67 43/64"	81P68WBP	138	3.87	0.09
		80 9/32"	81P80WBP	160	4.57	0.11


**Standard Includes**

- Top cap: metal
- Connector: metal
- Attachment hardware

**How to Specify**

- ① Model
- ② Top cap profile:  
F = Flat
- ③ Paint price group:  
STD = Group 1/Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- ④ Paint designator

**ETARRAN™** PANEL SYSTEM  
Stackable End Trim



Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

<i>Dimensions</i>			<i>Model</i>	<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Stackable End Trim</b>						
3/8"	2 1/2"	12 9/16"	<b>81P12ETCSP</b>	\$89	0.81	0.03
		18 7/8"	<b>81P18ETCSP</b>	101	1.16	0.03
		25 3/16"	<b>81P24ETCSP</b>	118	1.51	0.04

**Standard Includes**

- End trim: metal
- Attachment hardware

**How to Specify**

- ① Model
- ② End trim profile:  
**F** = Flat
- ③ Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ④ Paint designator

**ETARRAN™** PANEL SYSTEM  
Stackable Connectors

Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



<i>Dimensions</i>			<i>Model</i>	<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Stackable X Connectors (4-Way)</b>						
2 1/2"	2 1/2"	12"	<b>81P12CXSP</b>	\$151	3.29	0.20
		18"	<b>81P18CXSP</b>	166	4.42	0.20
		24"	<b>81P24CXSP</b>	181	5.54	0.30
<b>Stackable L Connectors (2-Way)</b>						
2 1/2"	2 1/2"	12"	<b>81P12CLSP</b>	\$134	3.31	0.20
		18"	<b>81P18CLSP</b>	149	4.45	0.20
		24"	<b>81P24CLSP</b>	164	5.58	0.30
<b>Stackable T Connectors (3-Way)</b>						
2 1/2"	2 1/2"	12"	<b>81P12CTSP</b>	\$147	3.30	0.20
		18"	<b>81P18CTSP</b>	162	4.43	0.20
		24"	<b>81P24CTSP</b>	177	5.56	0.30

**Standard Includes**

- Connector: metal
- Attachment hardware


**How to Specify**

- ① Model
- ② Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator


**ETARRAN™** PANEL SYSTEM  
Hi-Lo Trim

Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



<b>Dimensions</b>			<b>Model</b>	<b>Price</b>	<b>Shipping</b>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Panel-to-Panel</b>						
3/8"	2 1/2"	6 5/16"	<b>81P06HSCP</b>	\$70	0.79	0.03
		12 9/16"	<b>81P12HSCP</b>	77	0.79	0.03
		18 7/8"	<b>81P18HSCP</b>	86	1.14	0.03
		25 3/16"	<b>81P24HSCP</b>	94	1.48	0.04



<b>Connector-to-Panel</b>						
<i>D</i>	<i>W</i>	<i>H</i>	<b>Model</b>	<b>Price</b>	<i>lbs.</i>	<i>Cubic Feet</i>
3/8"	2 1/2"	6 5/16"	<b>81P06HTCP</b>	\$70	0.79	0.03
		12 9/16"	<b>81P12HTCP</b>	77	0.79	0.03
		18 7/8"	<b>81P18HTCP</b>	86	1.14	0.03
		25 3/16"	<b>81P24HTCP</b>	94	1.48	0.04

**Standard Includes**

- Trim: metal
- Attachment hardware

**How to Specify**

- ① Model
- ② Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator

**ETARRAN™** PANEL SYSTEM  
Xsede Height-Adjust Bracket



Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

<i>Dimensions</i>			<i>Price</i>	<i>Shipping</i>	
<i>D</i>	<i>W</i>	<i>H</i>		<i>lbs.</i>	<i>Cubic Feet</i>
<b>Right-Hand</b>					
24"			\$175	2.95	0.13
30"			185	3.23	0.13
<b>Left-Hand</b>					
24"			\$175	2.95	0.13
30"			185	3.23	0.13

**Standard Includes**

- Bracket

**Tips**

IMPORTANT: Height-adjust bracket is for use with Xsede T-leg base only.


**How to Specify**

- 1 Model
- 2 Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 3 Paint designator

**ETARRAN™** PANEL SYSTEM  
Accessory Rails

Pricing  
GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Dimensions W	Model	Price	Shipping	
			lbs.	Cubic Feet
<b>Accessory Rails</b>				
24"	<b>81P24ARP</b>	\$80	1.67	0.08
30"	<b>81P30ARP</b>	85	2.08	0.08
36"	<b>81P36ARP</b>	90	2.49	0.10
42"	<b>81P42ARP</b>	100	2.90	0.10
48"	<b>81P48ARP</b>	110	3.31	0.13
60"	<b>81P60ARP</b>	130	4.14	0.15

**Standard Includes**

- Accessory rail

**Tips**

**Plastic and metal work tools** are available for use with Etarran accessory rail.

▶ See the Perks Work Tools chapter in the *Kimball Accessory Solutions Price List*.

IMPORTANT: Total weight added to the load bars not to exceed 10 lbs.

**How to Specify**

- 1 Model
- 2 Paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 3 Paint designator


# ETARRAN™ PANEL SYSTEM

8-Wire Electrical Components | Power Distribution Assemblies & Jumper Cables

Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Application	Model	Price	Shipping	
			lbs.	Cubic Feet
<b>Power Distribution Assemblies</b>				
24"W panel	<b>81P24EDB8</b>	\$116	2.00	0.20
30"W panel	<b>81P30EDB8</b>	130	2.25	0.20
36"W panel	<b>81P36EDB8</b>	139	2.50	0.20
42"W panel	<b>81P42EDB8</b>	151	2.75	0.20
48"W panel	<b>81P48EDB8</b>	160	3.00	0.20
60"W panel	<b>81P60EDB8</b>	177	4.00	0.20
<b>Jumper Cables</b>				
Panel-to-Panel	<b>81PEJ18</b>	\$85	2.20	0.50
90° Corner	<b>81PEJ28</b>	\$90	2.20	0.50
Straight-Thru Connector	<b>81PEJ58</b>	\$90	2.20	0.50

### Standard Includes

- Power distribution assembly or jumper cable

### How to Specify

- 1 Model

Power distribution assemblies accommodate up to 4 receptacles.



# ETARRAN™ PANEL SYSTEM

8-Wire Electrical Components | Duplex Receptacles

## Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



Application	Model	Price	Shipping	
			lbs.	Cubic Feet
<b>For 3 and 1 Circuit Configuration</b>				
Circuit 1	<b>81PER18S15</b>	\$40	1.10	0.01
Circuit 2	<b>81PER28S15</b>	40	1.10	0.01
Circuit 3	<b>81PER38S15</b>	40	1.10	0.01
Circuit 4 (dedicated)	<b>81PER4D8S15</b>	40	1.10	0.01
<b>For 2 and 2 Circuit Configuration</b>				
Circuit 1	<b>81PER18S15</b>	\$40	1.10	0.01
Circuit 2	<b>81PER28S15</b>	40	1.10	0.01
Circuit 3 (dedicated)	<b>81PER3D8S15</b>	40	1.10	0.01
Circuit 4 (dedicated)	<b>81PER4D8S15</b>	40	1.10	0.01

### Standard Includes

- Receptacle with Share Neutral

### How to Specify

- ① Model
- ② Color designator:  
**439** = Nebulous White  
**462** = Cinder


# ETARRAN™ PANEL SYSTEM

8-Wire Electrical Components | Power Entries & Hardwire Components

Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

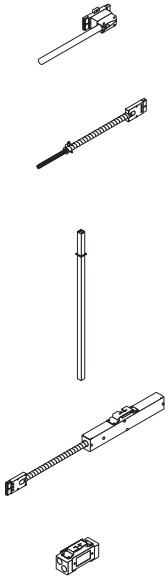

Description	Model	Price	Shipping	
			lbs.	Cubic Feet
<b>Base Power Entry</b>				
4' length	81PEF1U8	\$250	4.00	0.10
<b>Ceiling Power Entry</b>				
	81PEPEC8	\$395	5.00	0.10
<b>Power/Data Pole</b>				
	81PCDPP	\$325	9.77	0.70
<b>New York City Floor/Wall Power Entry</b>				
	81PEPEBNYC8	\$375	5.00	0.10
<b>Hardwire Box with Covers</b>				
	81PEHBB	\$161	1.50	0.01

### How to Specify

#### Power Entry

- ① Model

#### Power/Data Pole

- ① Model
- ② Paint price group:
  - STD** = Group 1/Standard
  - STDM** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- ③ Paint designator

#### Hardwire Box

- ① Model
- ② Cover plate paint designator:
  - 405** = Designer white
  - 462** = Cinder

Floor power entry conduit is 3/4" trade size x 66"L, actual outside diameter is 1 1/16".

Floor or ceiling power entry eliminates one receptacle location.

Access to ceiling power source is regulated by National Code to 12 ft. maximum conduit.


# ETARRAN™ PANEL SYSTEM

8-Wire Electrical Components | Power/Data Covers

Pricing

GSA SIN Pending

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36



<b>Dimensions</b>			<b>Model</b>	<b>Price</b>	<b>Shipping</b>	
<i>D</i>	<i>W</i>	<i>H</i>			<i>lbs.</i>	<i>Cubic Feet</i>
<b>Power/Data Covers</b>						
30"			<b>81P30WCPDP</b>	\$36	1.53	0.06
36"			<b>81P36WCPDP</b>	41	1.83	0.07
42"			<b>81P42WCPDP</b>	46	2.13	0.08
48"			<b>81P48WCPDP</b>	51	2.43	0.08
60"			<b>81P60WCPDP</b>	58	3.04	0.10

### How to Specify

- ① Model
- ② Paint price group:
  - STD** = Group 1/Standard
  - STDM** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- ③ Paint designator

**ETARRAN™** PANEL SYSTEM  
Paint

Surface Materials

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

*Applies to:*  
• All painted surfaces

**Standard (STD)**

437	Cement
462	Cinder
440	Cloud
423	Concrete
457	Dapple
405	Designer White
450	Fog
109	Fossil
488	Frosty White
461	Graphite
463	Iron
400	Linen
454	Morrel
443	Pavestone
455	Quarry
420	Sandstone
425	Shadow
460	Storm
419	Wallaby

**Metallic (STDM)**

*10% upcharge*

514	Carbon Metallic
547	Dark Bronze Metallic
501	Platinum Metallic
503	Satin Nickel Metallic
544	Silver Pearl
504	Taupe Metallic

**Gallery (GAL1)**

*10% upcharge*

G2004	Blush
G2006	Brick Red
G2003	Chive
G2002	Dark Blue
G2008	Eucalyptus
G2012	Ginkgo
G2007	Lavender Ash
G2001	Moon Beam
G2010	Naval
G2013	Olive Branch
G2011	Rustic Sun
G2005	Sangria
G2009	Tidewater

▶ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

▶ For special wood finishes, customer-specified paint, and customer-specified laminate processes and upcharges, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

**ETARRAN™** PANEL SYSTEM  
Textiles

Surface Materials

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

*Applies to:*  
• Panels  
• Connectors

**Kimball International**  
**Vertical Textiles**  
Price Grades AA-B

▶ See the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com) for a complete overview of the surface materials program and for the most up-to-date list of available textiles.

# ETARRAN™ PANEL SYSTEM

## COM Yardage Requirements

Kimball has analyzed each model to most accurately reflect the yardage requirements.

The yardage requirement for each model is listed for 66"W directional, 66"W non-directional, and 54"W directional, where applicable.

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
81P2412FS	1.6	1.6	1.6	81P4212FS	2.6	2.6	2.6
81P2418FS	1.6	1.6	1.6	81P4218FS	2.6	2.6	2.6
81P2430ANP	1.6	1.6	1.6	81P4230ANP	2.6	2.6	2.6
81P2430APP	1.6	1.6	1.6	81P4230APP	2.6	2.6	2.6
81P2442ANP	1.6	1.6	1.6	81P4242ANP	2.6	2.6	2.6
81P2442APP	1.6	1.6	1.6	81P4242APP	2.6	2.6	2.6
81P2448ANP	1.6	1.6	1.6	81P4248ANP	2.6	2.6	2.6
81P2448APP	1.6	1.6	1.6	81P4248APP	2.6	2.6	2.6
81P2454ANP	1.6	1.6	1.6	81P4254ANP	2.6	2.6	2.6
81P2454APP	1.6	1.6	1.6	81P4254APP	2.6	2.6	2.6
81P2468ANP	1.6	N/A	1.6	81P4268ANP	2.6	N/A	2.6
81P2468APP	1.6	N/A	1.6	81P4268APP	2.6	N/A	2.6
81P3012FS	2.0	2.0	2.0	81P4812FS	3.0	3.0	3.0
81P3018FS	2.0	2.0	2.0	81P4818FS	3.0	3.0	3.0
81P3030ANP	2.0	2.0	2.0	81P4830ANP	3.0	3.0	3.0
81P3030APP	2.0	2.0	2.0	81P4830APP	3.0	3.0	3.0
81P3042ANP	2.0	2.0	2.0	81P4842ANP	3.0	3.0	3.0
81P3042APP	2.0	2.0	2.0	81P4842APP	3.0	3.0	3.0
81P3048ANP	2.0	2.0	2.0	81P4848ANP	3.0	3.0	3.0
81P3048APP	2.0	2.0	2.0	81P4848APP	3.0	3.0	3.0
81P3054ANP	2.0	2.0	2.0	81P4854ANP	3.0	3.0	3.0
81P3054APP	2.0	2.0	2.0	81P4854APP	3.0	3.0	3.0
81P3068ANP	2.0	N/A	2.0	81P4868ANP	3.0	N/A	3.0
81P3068APP	2.0	N/A	2.0	81P4868APP	3.0	N/A	3.0
81P3612FS	2.4	2.4	2.4	81P6012FS	3.6	3.6	3.6
81P3618FS	2.4	2.4	2.4	81P6018FS	3.6	3.6	3.6
81P3630ANP	2.4	2.4	2.4	81P6030ANP	3.6	3.6	3.6
81P3630APP	2.4	2.4	2.4	81P6030APP	3.6	3.6	3.6
81P3642ANP	2.4	2.4	2.4	81P6042ANP	3.6	3.6	3.6
81P3642APP	2.4	2.4	2.4	81P6042APP	3.6	3.6	3.6
81P3648ANP	2.4	2.4	2.4	81P6048ANP	3.6	3.6	3.6
81P3648APP	2.4	2.4	2.4	81P6048APP	3.6	3.6	3.6
81P3654ANP	2.4	2.4	2.4	81P6054ANP	3.6	3.6	3.6
81P3654APP	2.4	2.4	2.4	81P6054APP	3.6	3.6	3.6
81P3668ANP	2.4	N/A	2.4	81P6068ANP	3.6	N/A	3.6
81P3668APP	2.4	N/A	2.4	81P6068APP	3.6	N/A	3.6

## Surface Materials

GSA Non-Contract

Statement of Line	▶ See page ET.2
Planning	ET.4
Pricing	ET.19
Surface Materials	ET.36

### How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.  
▶ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

▶ See the *Kimball Surface Materials Reference Guide* at [kimbal.com](http://kimbal.com) for COM policy and additional information.