

Uf Select

Alliance Seating Textile Collection

Concept Pro

Ink & Stain Resistant



777-50103 Cloudburst



777-34153 Malt Ball




777-52443 Gold Finch



777-27153 Air Blue




777-72453 Aqua Sea



777-33893 Camouflage




777-82753 Calendula




777-27603 Carolina




777-72463 Biscay Bay



777-34773 Lentil



777-82703 Apricot Ice



777-27453 Olympic




777-33673 Clotted Cream




777-00153 Frostline




777-50073 Pediment




777-52763 Wolf



777-14543 Taffy




777-28033 Ink Blue




777-43093 Lima Bean




777-50243 Lava Smoke



777-52753 Grey Goose




777-52853 Black Eel



777-14533 Granita




777-93493 Red Cabbage




777-43173 Lawn Green

Impasto

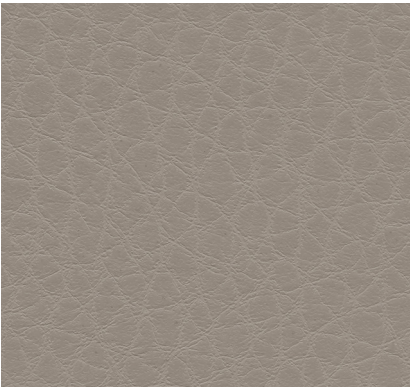


733-34673 Tofu




733-60973 Almond Milk




733-73313 Golden Ochre




733-53513 Incense



733-43553 Light Moss




733-33853 Caribou




733-33903 Amberglow




733-27743 Bristle Blue



733-43393 Avocado



733-35143 Snickerdoodle



733-82683 Roasted Squash




733-27853 Deepwell



733-43563 Pine Needle



733-00613 Ice Storm




733-58843 Thunder



733-33343 Tiger Eye




733-14263 Mahogany Red




733-26053 Nocturne Blue




733-72373 Genesis



733-60943 Arctic Fox




733-60983 Black Spinel



733-34863 Pumpernickel



733-14413 Firecracker



733-93543 Kalamata



733-43403 Bay Leaf


Montage




744-33373 Alpaca




744-35563 Cord



744-14403 Mimosa



744-27863 Blue Graphite




744-72313 Bluegrass




744-35673 Cinnamon Toast




744-93053 Passion Fruit




744-26543 Bluestone




744-43243 Balsam




744-35553 Old Penny




744-14453 Vivid Punch



744-25063 Indigo Batik




744-43493 Grasshopper




744-35723 Jojoba




744-35593 String




744-82673 Orange Pepper




744-14423 Poinsettia Red




744-60873 Gris




744-43253 Sorrel




744-50393 Horseradish




744-35583 Oakmoss




744-14223 Firebrick



744-14233 Red Rock



744-60883 Cast Iron



744-35573 Acacia


Lino



740-65783 Wigwam



740-34513 Haystack




740-82613 Yarrow



740-58733 Coin




740-43313 Granny Smith




740-34463 Cider



740-82593 Carrot




740-50143 Ore



740-43303 Verde



740-34063 Trunk




740-82603 Adobe Red



740-25143 Bosphorous



740-43323 Jadite



740-65783 Wigwam



740-33793 Hearth



740-50193 Lead



740-13943 Plum Wine



740-25123 Independence



740-43373 Pinenut

	Concept Pro Ink & Stain Resistant*	Impasto	Montage	Lino
Content	Polycarbonate Blended Surface	Polycarbonate Blended Surface	Polycarbonate Blended Surface	Polycarbonate Blended Surface
Finishing/Backing	None / 65% Polyester, 35% Cotton	None / 65% Polyester, 35% Cotton	None / 65% Polyester, 35% Cotton	None / 65% Polyester, 35% Cotton
Width	54"	54"	54"	54"
Weight	Approx. 12.53 oz./sq. yd	Approx. 12.53 oz./sq. yd	Approx. 12.53 oz./sq. yd	Approx. 12.53 oz./sq. yd
Repeat	None	None	None	None
Abrasion (Meets or Exceeds)	250,000 Double Rubs ASTM D4157* *Wyzenbeek	200,000 Double Rubs ASTM D4157* *Wyzenbeek	200,000 Double Rubs ASTM D4157* *Wyzenbeek	200,000 Double Rubs ASTM D4157* *Wyzenbeek
Hydrolysis	10 Weeks, ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)	10 Weeks, ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)	10 Weeks, ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)	10 Weeks, ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)
Antimicrobial	No	No	No	No
Phtalates	No	No	No	No
Railroad	No	No	No	No
Adhesion of Coating	ASTM D751	ASTM D751	ASTM D751	ASTM D751
Tear Strength	ASTM D2261	ASTM D2261	ASTM D2261	ASTM D2261
Breaking Strength	ASTM D751	ASTM D751	ASTM D751	ASTM D751
Colorfastness to Light	200 hrs. (AATCC 16.3), Grade 4 ISO 105 B02, Grade 6	200 hrs. (AATCC 16.3), Grade 4 ISO 105 B02, Grade 6	200 hrs. (AATCC 16.3), Grade 4 ISO 105 B02, Grade 6	200 hrs. (AATCC 16.3), Grade 4 ISO 105 B02, Grade 6
Colorfastness to Crocking	Grade 4-5 Wet+Dry, AATCC 8	Grade 4-5 Wet+Dry, AATCC 8	Grade 4-5 Wet+Dry, AATCC 8	Grade 4-5 Wet+Dry, AATCC 8
Flammability	FMVSS 302 - Pass ASTM E84 (Adhered), Class A CA TB 117-2013, Pass NFPA 260, Class 1 UFAC, Class 1 AB 2998 No flame retardants are added	FMVSS 302 - Pass ASTM E84 (Adhered), Class A CA TB 117-2013, Pass NFPA 260, Class 1 UFAC, Class 1 AB 2998 No flame retardants are added	FMVSS 302 - Pass ASTM E84 (Adhered), Class A CA TB 117-2013, Pass NFPA 260, Class 1 UFAC, Class 1 AB 2998 No flame retardants are added	FMVSS 302 - Pass ASTM E84 (Adhered), Class A CA TB 117-2013 , Pass NFPA 260, Class 1 UFAC, Class 1 AB 2998 No flame retardants are added
Bleach Cleanable	Yes	Yes	Yes	Yes
Cleaning Code	WS	WS	WS	WS

*Removal of denim dye may vary depending on the period of time the stain sets in. While Concept Pro offers excellent protection, full removal is not guaranteed.

Concept Pro is approved for both clinical and non-clinical healthcare.

Ultrafabrics’ collections meet or exceed ACT Voluntary Performance Guidelines.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit ultrafabricsinc.com.