



TRIADE PRO XXL

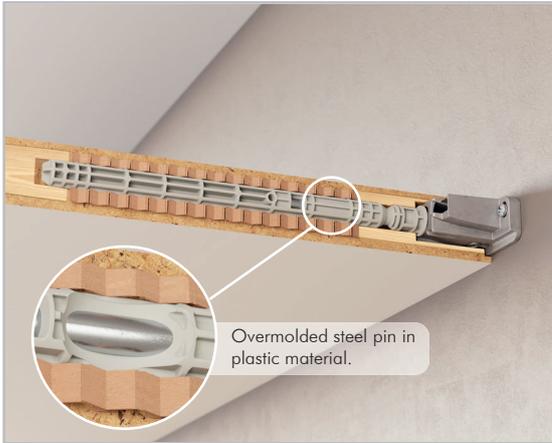

40 mm min.


40 kg per pair for shelf 400 mm deep

SPECIFICATION

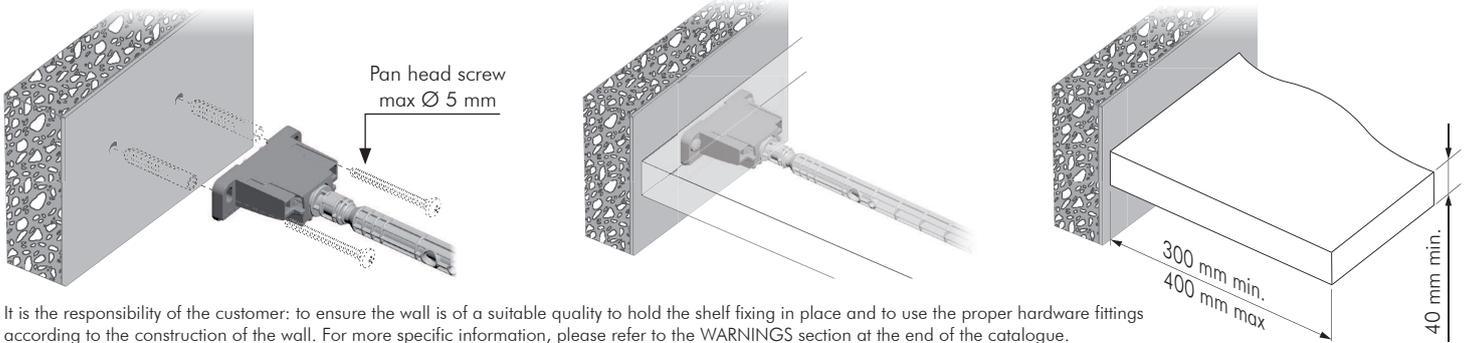


ADJUSTMENT






BRACKET ALIGNMENT



LATERAL ADJUSTMENT




INCLINATION ADJUSTMENT

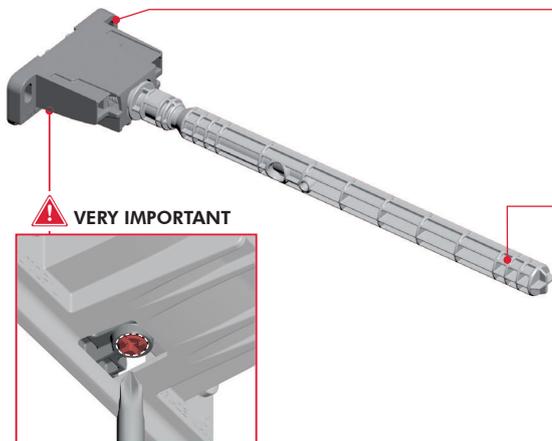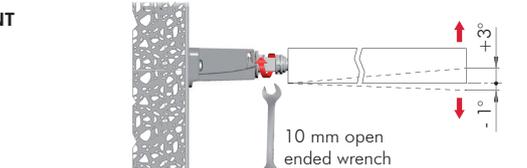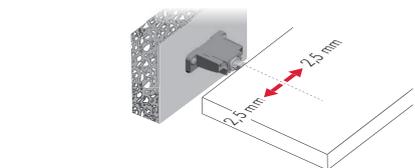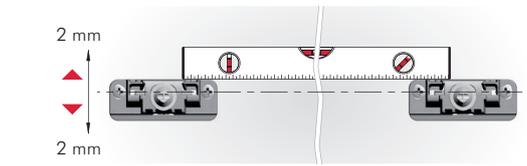


Screw to lock when adjustments are finished.

LOADING CAPACITY CHART

(The figures refer to 2 shelf supports)



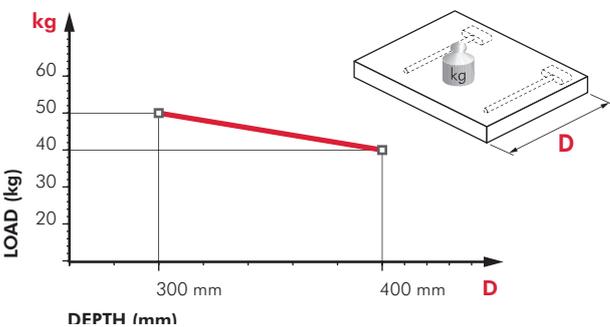


RECOMMENDED NUMBER OF TRIADE PRO XXL PER SHELF


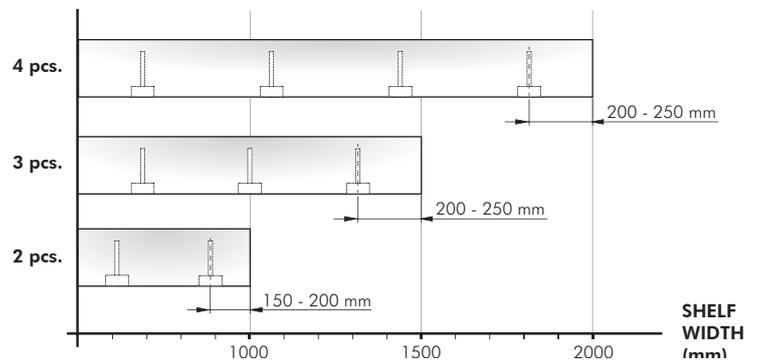







	= PZ2		= open ended wrench 12 mm
	ZA		ST
	EP		= 25 pcs.
		1623004000	

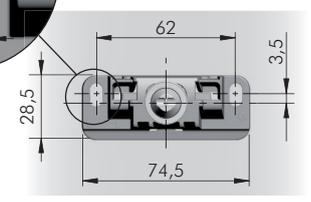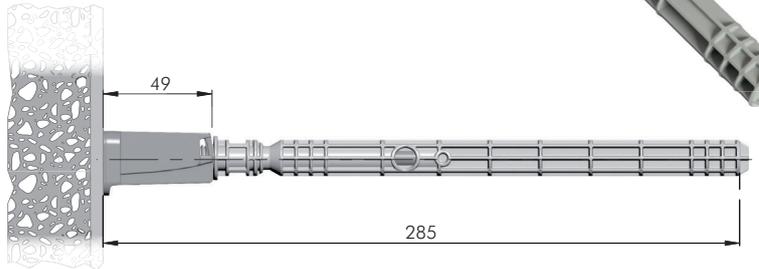



VERY IMPORTANT
Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.

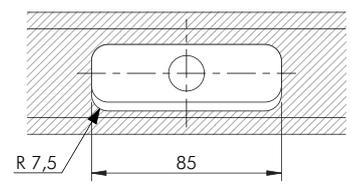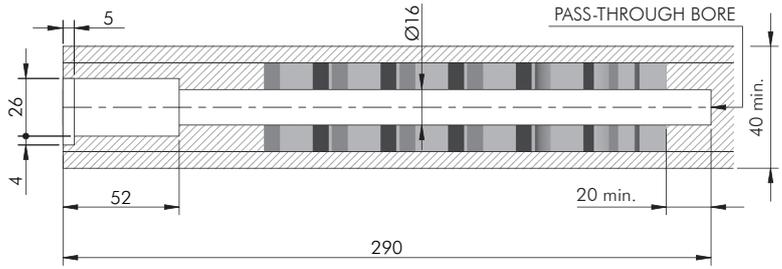


OPTIONAL DRILLING FOR SECURITY LOCKING

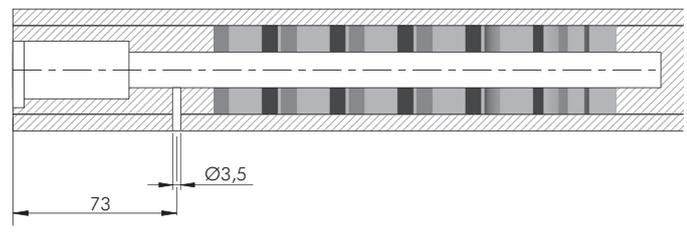



	= S2		= on request
	ST		L
			1mm
21105190ZN	14	40	
21105060ZN	20	50	

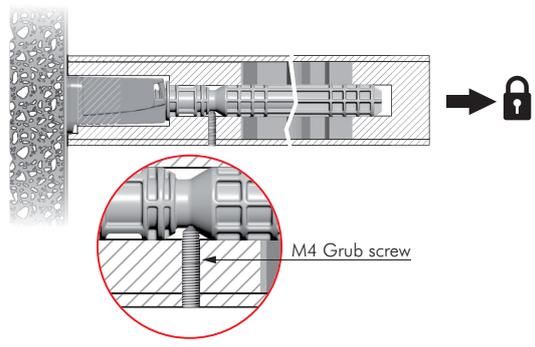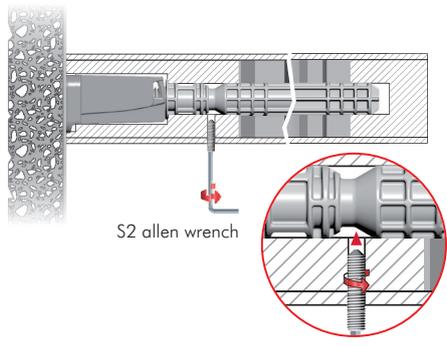


TRIADE PRO XXL AND BRACKET

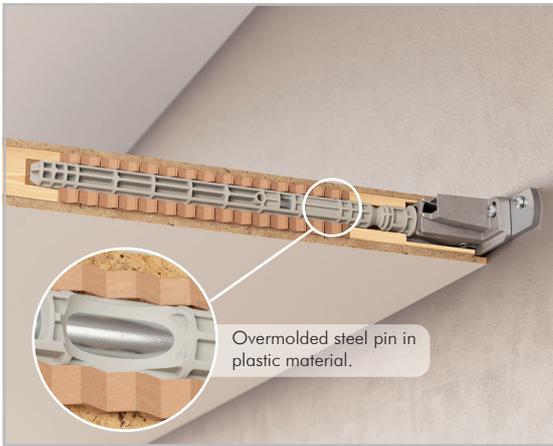


OPTIONAL SECURITY LOCKING

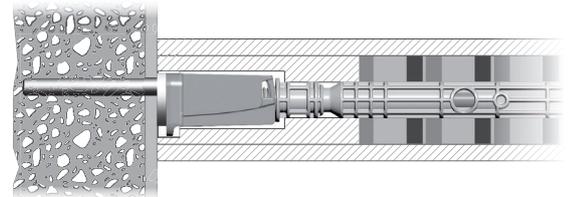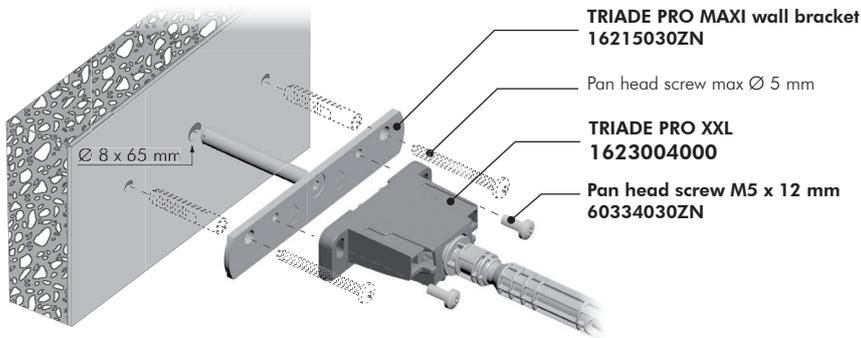

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

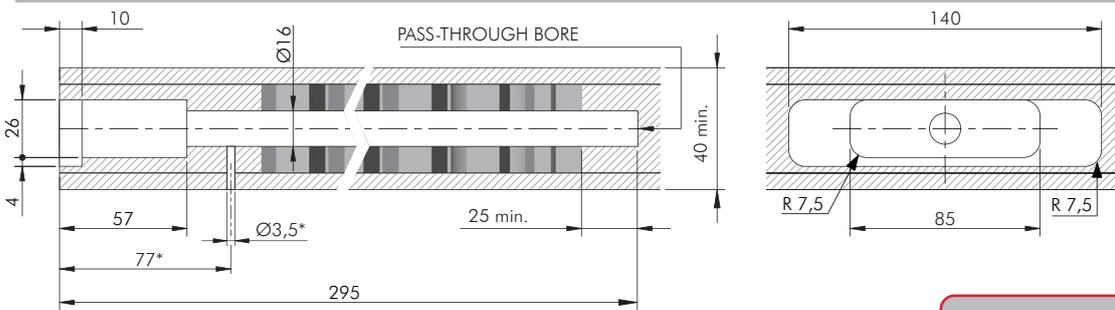

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro XXL section.

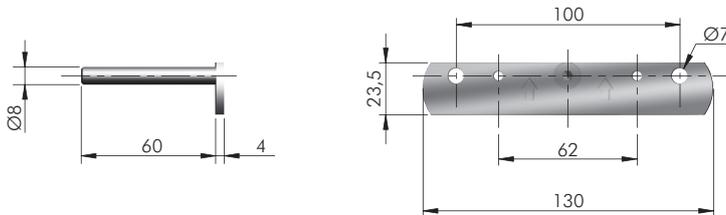

FIXING ACCESSORY



ST = 100 pcs.

123

16215030ZN

= M5 = PZ2

ST = 500 pcs.

123

60334030ZN