

Pressure is Productivity

MEDIUM AIR SERIES Construction & Mining Compressors







Features:

- · Compact in its class, maximization in transport and manoeuvrability
- Rugged enclosure for dusty environments
- Operate at maximum ambient of 53 deg C
- Cool Box design ensures low temperature inside the box, improves durability and reliability
- Highly fuel efficient in its class
- · Low engine rpm ensures reliability and low maintenance cost
- Low running cost
- Suitably sized fuel tank ensures maximum running hours
- Maximum towable speeds of 30km/hr
- · Ease of adjusting height for towing with various towing equipments
- Lockable doors
- · Ease of serviceability with doors opening
- Space for utility


Optional Feature on Request:


Skid version

Specifications:

| Model | SHP500 |
|--------------------------|---------------|
| FAD* (CFM) | 500 |
| Working Pressure (PSI) | 218 |
| Unloading Pressure (PSI) | 230 |
| Engine | |
| Engine Make | Ashok Leyland |
| Model | 6DTI |
| Engine Power (HP) | 188 |
| Engine Rated (RPM) | 1800 |
| Low Idle (RPM) | 1300 |
| Electrical | |
| Battery (Volts) | 24 |
| Dimension in MM | |
| Length | 4080 |
| Width | 2030 |
| Height | 2200 |
| Weight (Kgs) | 2350 |
| Towing Speed (km/hr) | 30 |

*In Accordance to ISO1217 1996 Annexure E

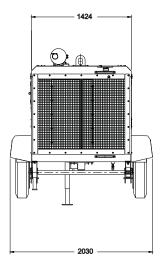

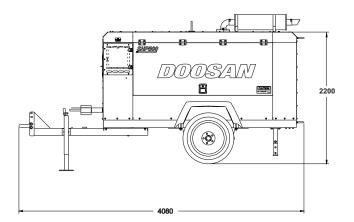



Doosan Bobcat India Pvt. Ltd. 2nd & 3rd Floor, Durga Arcade, Site no 5, MCHS layout, Jakkur, Yelhanka Hobli, Bangalore - 560064, India. Tel.No: 080-67231001, Toll Free : 1800 103 2869 Email : ap.yogananda@doosan.com Website : www.doosanportablepower.com

Authorized Dealer:

Product improvement is a continuous goal at Doosan. Design and specifications are subject to change without notice or obligation