

BOBCATALOG

20
23



HOMEOWNER EDITION



THIS IS WHERE ONE TOUGH ANIMAL PLAYS.



Every acre of your property throws a lot of work at you, and your spirit is too wild for tame equipment. Make some room in your shed and talk to your local dealer about how Bobcat® equipment can help you get it all done around your property.

Our lineup keeps growing to keep up with the big dreams you have for your property. Whether you're transforming the land, caring for animals or putting every blade of grass in its place, with Bobcat equipment, no task is beyond your ability.



THE RIGHT FIT FOR YOUR PROPERTY OR PROJECT

IF YOU HAVE THE WILL TO DO A TOUGH JOB, WE HAVE THE WAY TO CONQUER IT.

COMPACT TRACTORS

These easy-to-operate machines deliver power, versatility and comfort for tough tasks.



TOOLCAT UTILITY WORK MACHINES

These machines work like a fleet of one with the ability to lift, haul, tow and use attachments.



MINI TRACK LOADERS

Squeeze through gates and narrow areas to tackle heavy-duty tasks in backyards, fenced areas and other tight spaces.



UTILITY VEHICLES

Bobcat utility vehicles have great cargo box capacity and towing ability for work-focused performance.



SMALL ARTICULATED LOADERS

Take on big challenges in small spaces, especially where turf-friendliness is a must.



ZERO-TURN MOWERS

Bring industry-leading toughness to your turf. When it comes to keeping your acreage looking its best, Bobcat zero-turn mowers are a cut above the rest.





ZERO-TURN MOWERS

OWN YOUR TURF.



Bobcat zero-turn mowers are engineered to keep you on top of your game.

This is your turf. Take control of every inch with Bobcat zero-turn mowers. These fast, powerful machines achieve a pristine quality of cut with their innovative features and hard-working, long-lasting, rugged durability. No matter what you're looking for in a mower, Bobcat gives you the edge you need for a tough job that's all about results.

ALWAYS PLAY WITH A STACKED DECK.

There's a lot that goes into engineering the perfect cut – and it goes beyond just the cutting blade. From deep deck designs and their unique geometries to patented baffles, airflow and vacuum lift technologies, Bobcat zero-turn mower cutting decks deliver a quality of cut virtually no other zero-turn mower can match.

RUGGED DURABILITY WITH TUFDECK & TUFDECK PRO CUTTING SYSTEMS

Tough and reliable for a perfectly manicured finish every time.

- Steel-fabricated spindles for reliability
- Constructed with heavy-gauge fabricated steel
- Improved vacuum lift
- Easily replaceable, bolt-on front baffles

SUPERIOR DISCHARGE WITH DURADECK CUTTING SYSTEMS

Tough enough to handle everything your property dishes out.

- Double-Wave™ bolt-on baffles to increase airflow throughout the deck
- Even clipping dispersal
- Adjustable front lip for optimized cutting on varying conditions and grass types
- Steel-fabricated spindles

OPTIMUM MOWING WITH BULLNOSE AIRFX CUTTING SYSTEMS

A full-scale system designed to keep you a cut above the rest.

- Deeper profile for improved vacuum lift
- Bolt-on, replaceable, patented Air-Gap baffles for more efficient airflow and enhanced serviceability
- Bullnose design stands grass up before it reaches the mower blades
- Steel-fabricated spindles for increased durability
- Even clipping dispersal
- Improved deck cleanliness
- Adjustable front lip for optimized cutting on varying conditions and grass types

DEEP DECK DESIGN WITH PATENTED AIR-GAP Baffles INCREASES AIRFLOW, DELIVERS AN EXCEPTIONAL QUALITY OF CUT AND ENSURES A CLEANER DECK.

Powerful airflow aggressively shoots clippings out the extra-large discharge chute for a clean finish.





ZERO-TURN MOWERS

COMMERCIAL MOWERS

2000 HOURS LIMITED WARRANTY



ZT7000 ZERO-TURN MOWER

Built to boost your productivity, the ZT7000 is the peak of toughness and best-in-the-business performance. With transport speeds up to 19 mph and mowing speeds up to 13 mph, you can knock out quality results quickly and move on to your next project.

- Kawasaki® FX1000V 35.0 hp or FX1000V-EFI 38.5 hp engines
- Includes a 61- or 72-inch bullnose AirFX™ deck
- Dual fuel tanks for 15 gallons of capacity
- Transport speeds up to 19 mph and cutting speeds up to 13 mph
- Extra-high back, full mechanical suspension seat
- Rotating bumper simplifies routine maintenance



ZT6100 ZERO-TURN MOWER

Built for anyone who demands as much from their machine as they demand from themselves. The ZT6100 has the power, speed and fuel capacity you need for hours of uncompromising mowing power.

- Kawasaki FX850V-EFI 29.5 hp engine
- Includes a 61-inch bullnose AirFX deck
- Dual fuel tanks for 15 gallons of capacity
- Ground speeds up to 12 mph
- High back, full mechanical suspension seat
- Rotating bumper simplifies routine maintenance



ZT6000 ZERO-TURN MOWER

The versatility and dependability of the ZT6000 will give your family something to fight over.

- Kawasaki FX801V 25.5 hp engine
- Includes a 52- or 61-inch AirFX deck
- Dual fuel tanks for 15 gallons of capacity
- Ground speeds up to 12 mph
- High back, full mechanical suspension seat





ZS4000 ZERO-TURN MOWER

Stability. Agility. Productivity. With a compact size, extra ground clearance and large drive tires, the ZS4000 gets around obstacles and on to the next job.

- Kawasaki engine options from 19.0-26.0 hp
- Includes a 36-inch DuraDeck™ cutting system or a 48-, 52- or 61-inch AirFX deck
- 5.1- or 6.5-gallon fuel capacity (depending on model)
- Ground speeds up to 10.5 mph (depending on model)
- Stand-on operator station with flip-up, anti-vibration platform allows for use as a walk-behind mower



WB700 WALK-BEHIND MOWER

The WB700 is a commercial-grade, mid-size walk-behind mower with a powerful hydraulic drive that reduces operator fatigue and minimizes ground disturbance. Its compact size is great for mowing around obstacles and highly landscaped environments.

- Kawasaki FS-series engines from 14.5-18.5 hp
- Includes a 36-, 48- or 52-inch TufDeck™ cutting system
- 5 gallons of fuel capacity
- Ground speeds up to 6.5 mph



ENTRY-LEVEL COMMERCIAL MOWERS

ZT3500 ZERO-TURN MOWER

Convenient maintenance and all-day mowing comfort make the ZT3500 a powerful machine for anyone ready to take on the toughest turf.

- Kawasaki FX series engine from 20.5-23.5 hp
- Includes a 48-, 52-, or 61-inch TufDeck Pro cutting system
- 7.8 gallons of fuel capacity
- Ground speeds up to 10 mph
- High back, full mechanical suspension seat



1000 HOURS LIMITED WARRANTY

COMMERCIAL-GRADE DURABILITY AND PERFORMANCE AT AN AFFORDABLE PRICE



Check out the Bobcat mower lineup.





RESIDENTIAL MOWERS

ZT3000 ZERO-TURN MOWER

Pride in a job well done. That's the ZT3000 sweet spot. With top reliability and power for the job, you'll get a great quality cut no matter how many acres you maintain.

- Kawasaki FT series engine from 20.0-24.0 hp
- Includes a 48-, 52-, or 61-inch TufDeck Pro cutting system
- 3.8 gallons of fuel capacity
- Ground speeds up to 8 mph
- High-back spring suspension seat

1000 HOURS LIMITED WARRANTY



ZT2000 ZERO-TURN MOWER

The ZT2000 brings more commercial features than other zero-turn mowers in the same price range. You'll get durability and a professional cut at an affordable price.

- Kawasaki FR series engine options from 21.5-23.0 hp
- Includes a 42-, 48-, or 52-inch TufDeck cutting system
- 3.8 gallons of fuel capacity
- Ground speeds up to 7 mph
- High-back spring suspension seat

500 HOURS LIMITED WARRANTY



SEE THE FULL LINEUP OF BOBCAT MOWERS AT BOBCAT.COM OR VISIT YOUR DEALER.



THESE BEAUTIES ARE BEASTS.

Bobcat compact tractors are heavy on capabilities to lighten your load.

With legendary Bobcat performance funneled into multiple models across four platforms, it's easy to find the right one for your needs. From the nimble yet powerful 1000-2000 platforms all the way up to the heavy hitters in the 4000-5000 platforms, these workhorses all bring rugged performance you can count on. And with an array of attachments and implements to boot, your new compact tractor will have you looking for new to-dos to cross off.

CHOOSE FROM FOUR SIZE CLASSES.

Bobcat offers an extensive lineup of compact tractors in four platforms that vary in machine size, horsepower range and cab configurations.



1000 PLATFORM **21-25 HP SUB-COMPACT TRACTORS**

A good choice for small acreages



2000 PLATFORM **25-40 HP COMPACT TRACTORS**

Open or enclosed cab options; a good choice for larger acreage owners



4000 PLATFORM **45-58 HP COMPACT TRACTORS**

Open cab; a good choice for farms and landscaping



5000 PLATFORM **45-58 HP COMPACT TRACTORS**

Fully enclosed cab; a good choice for farms and ranches

SEE YOUR DEALER OR VISIT BOBCAT.COM TO GET A CLOSER LOOK AT COMPACT TRACTORS.



CHOOSE FROM FOUR TRANSMISSION TYPES.

MANUAL 9X3 SHIFT TRANSMISSION

This economical, reliable manual-shift transmission has nine forward gears and three reverse gears. It's the classic tractor transmission that many people remember from growing up on the farm.

2-RANGE & 3-RANGE HYDROSTATIC TRANSMISSION

The hydrostatic transmission (HST) provides maximum ease of use and fast, simple direction changes. A twin-pedal design provides one pedal to move you forward; the other moves you in reverse.

MANUAL 8X8 SYNCHRO SHUTTLE TRANSMISSION

For shift-on-the-fly functionality that is similar to a stick-shift automobile, the two-range synchro shuttle transmission allows you to clutch and shift across eight forward and eight rear speeds.

ELECTRONIC HYDROSTATIC TRANSMISSION (E-HST)

E-HST offers the simplicity and ease of direction change you get with HST – plus the electronic acceleration provides near-effortless input on the travel pedal to control your speed. It works like an automatic transmission in a car. It also includes cruise control to keep you moving at a constant speed.





PERFORMANCE

3-POINT HITCH AND REAR PTO

The 3-point hitch enables you to do a large number of tasks on your property using the drawbar or PTO-powered implements.

POWERFUL 3-POINT HITCH LIFT CAPACITY

Count on excellent 3-point hitch lift capacities to increase your implement capabilities and improve your performance.

DRAWBAR TOWING POWER

The Bobcat compact tractor's drawbar delivers heavy towing performance. An adjustable hitch provides towing flexibility and convenience.

STANDARD FOUR-WHEEL DRIVE

All Bobcat compact tractors come with standard four-wheel drive so you can easily power through tough terrain.

TIGHT TURNING RADIUS

Bobcat compact tractors feature a tight turning radius – as little as 8 feet, depending on the model – so you can easily move and work close to trees, buildings and other obstacles.



VERSATILITY

THREE TIRE OPTIONS

Turf, industrial and agricultural tires offer a combination of reliability and ride quality to match the requirements of your work.

ATTACHMENTS AND IMPLEMENTS

There's no limit to what you can accomplish with your front-end loader with standard quick-attach mounting system for a variety of attachments, plus a wide variety of available 3-point implements.

— NOTE: 1000 platform machines come standard with a Category 1 Limited 3-point hitch.

See the full compact tractor lineup
at Bobcat.com



VIEW ATTACHMENT SECTION IN THE BACK OF THE CATALOG FOR MORE DETAILS AND LIST OF ATTACHMENTS AND IMPLEMENTS.



UPTIME

HEAVY-DUTY BRUSH GUARD

As you maneuver through debris, branches and other obstacles, the brush guard protects your compact tractor's front end. It's included with the front-end loader and also available separately.

METAL HOOD

The streamlined metal hood design improves visibility and reliably protects the engine and components from dirt and debris. Available on 2000, 4000 and 5000 platform models.

ONE-PIECE ENGINE HOOD WITH AIR-CYLINDER ASSIST

The hood is easy to lift thanks to the air-cylinder assist. When fully opened, the hood stands nearly perpendicular to the engine compartment (on select models).

ONE-SIDE MAINTENANCE

All daily checks, engine fluid fills and filters are located on one side of the engine, making it easy to keep your tractor running smoothly with minimal effort. Available on select models.

COMFORT

EXCELLENT VISIBILITY

The compact tractor offers a panoramic view with minimal obstruction and great rear visibility to monitor your implement.

ENCLOSED CAB

A factory-installed, radio-ready enclosed cab with air conditioning and heat on select models keeps you working comfortably in all kinds of weather.

DELUXE SUSPENSION SEAT

The fully adjustable deluxe suspension seat, available on select models, absorbs vibration and bumps to maximize comfort.

INTEGRATED LOADER JOYSTICK LEVER

Select models offer a cab-integrated joystick lever that's within easy reach for simple loader work. It's strategically positioned to maintain comfortable operation.

CHAZ DAUGHTRY IS GROWING MORE THAN VEGETABLES.

Chaz Daughtry grew up around ambitious, generous people, so it was no surprise when he decided to follow in their footsteps. Chaz took his passions for people and agriculture and turned them into a career. With the help of volunteers, friends and a Bobcat compact tractor, Chaz is taking the Houston agriculture scene by storm.



Watch his story.



***“I WANT TO SHOW
KIDS THE OPPORTUNITIES
IN AGRICULTURE.”***

– CHAZ DAUGHTRY



UTILITY VEHICLES



ALL-OUT PERFORMANCE FOR WHEN YOU'RE ALL ABOUT THE WORK

Go all out and get it all done with Bobcat utility vehicles.

With industry-leading specs, proven durability and comfort features that the hardest-working property owners deserve, Bobcat utility vehicles deliver reliable productivity and performance every day.



**VISIT BOBCAT.COM TO LEARN MORE
OR VISIT YOUR DEALER.**



COMPOSITE CARGO BOX

With 15.6 cubic feet of storage space, this cargo box is one of the largest in its class. A rock-solid, one-piece composite material design resists dents, scratches, rust and corrosion.

UV34 AND UV34XL

KEY FEATURES

LEADING PAYLOAD AND TOWING CAPACITIES

Haul and pull bigger loads with a payload capacity of 1,250 pounds and a tow rating of 2,500 pounds – the highest payload and tow rating of nearly any brand.

FAST AND EASY MAINTENANCE

Check the oil without having to raise the cargo box. Fewer grease points and easier access to coolant, air, oil and fuel filters help reduce time spent servicing your machine.

TOUGH CHASSIS AND SUSPENSION

A strong, rigid chassis and heavy-duty driveline components ensure better work performance, more durability and increased towing capacity, along with higher ground clearance. Greater range of motion in the suspension provides superior ride quality.

HEAVY-DUTY CLUTCH

The heavy-duty clutch ensures optimal belt engagement to minimize slippage and extend service intervals.

COMFORTABLE CAB

The low and wide cab opening, comfortable seat, three-point seat belt with comfort strap, tilt steering and more legroom make every minute of your day more enjoyable.

SIMPLE OPERATION

Enjoy intuitive operation with power steering and responsive control, even when loaded with cargo or towing trailers. Ergonomically designed instrumentation and controls plus large, easy-to-read gauges further enhance your experience.



*Customize your UTV.
Scan to view options and accessories.*





TOOLCAT UTILITY
WORK MACHINES



LOOKS LIKE NOTHING ELSE. WORKS LIKE NOTHING ELSE.

Meet the master of all trades: the Toolcat utility work machine.

Part pickup truck, compact tractor, skid-steer loader, utility vehicle, and ready to tackle anything. The Toolcat™ utility work machine is a bold invention for people who have a lot to do and need a machine that can get it done. Whether lifting, hauling, towing or using one of 45+ attachments and implements, this do-it-all machine is in a league of its own.



**CHECK IT OUT AT BOBCAT.COM
OR VISIT YOUR DEALER.**

UW53 AND UW56

KEY FEATURES

OPERATOR-FRIENDLY CONTROLS

Controls are ergonomically designed, cleanly laid out and, most importantly, simple to use.

4,000 LB. TOWING CAPACITY

Includes a standard 2-inch receiver hitch and a towing capacity of 4,000 pounds for moving trailers, boats and more. Hydrostatic braking and secondary multi-disc wet brakes let you tow with confidence.

COMFORTABLE INTERIOR


Comfort and dash features include heat, air conditioning, an integrated 5-inch display, optional radio, a USB port for charging mobile devices and more.

TWO DRIVE MODES

The drive response system includes two drive modes for the best combination of speed, torque and performance for the task. It's easy to adjust between traveling and working.


ALL-WHEEL STEER

Each wheel of your Toolcat utility work machine turns separately, resulting in a tight, turf-friendly turning radius of 11.2 feet.

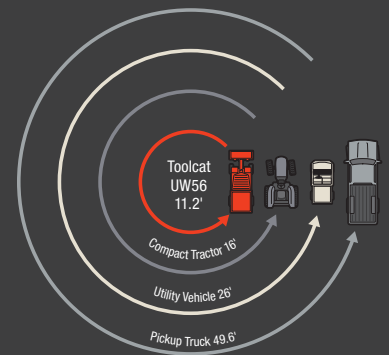

HYDROSTATIC FOUR-WHEEL DRIVE

Get maximum traction. If one wheel loses tractive effort, the wheel with the most traction receives the most torque – without the need to engage any locks, buttons or levers.

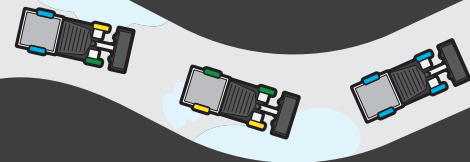

YELLOW – REDUCED TRACTIVE EFFORT
GREEN – TRACTIVE EFFORT
BLUE – FULL TRACTIVE EFFORT



ATTACHMENTS AND IMPLEMENTS

HIGH-FLOW HYDRAULICS

Get more performance for jobs requiring high power, like stump grinding, blowing snow and digging postholes. It's standard on the UW53 and available as an option on the UW56.

UW53 INCLUDES 3-POINT HITCH AND PTO IN BACK

Unlock even more capability in the Toolcat UW53, which comes standard with a 3-point hitch and power take-off that enables you to use a wide variety of 3-point implements.

45+ ATTACHMENTS IN FRONT

Pair either machine with more than 45 front-mounted attachments and get more work from your equipment investment.



VIEW ATTACHMENT SECTION IN THE BACK OF THE CATALOG FOR MORE DETAILS AND LIST OF ATTACHMENTS AND IMPLEMENTS.



MINI TRACK LOADERS



MINI BUT MIGHTY

Bobcat mini track loaders make quick work of grueling manual tasks.

Easy-to-use mini track loaders travel and work where other machines can't, making them a popular choice for jobs like landscaping and grounds maintenance. Don't be fooled by the small size – they do serious work with minimal ground compaction. It might be small, but it's a powerful machine with a rated operating capacity of 1,000 pounds.

Use Bobcat MT100 to take on big tasks including digging, trenching, tilling, moving material and more.

SEE YOUR DEALER TO GET A CLOSER LOOK.





Scan to watch video on choosing the right loader: MTL or SAL.

MT100

KEY FEATURES

EASY OPERATION

The two ISO joystick controls and ergonomic design on the MT100 make it simple and comfortable to operate. Even less experienced equipment operators can get tasks done with ease.

ULTRA-COMPACT SIZE

Only 36 inches wide when paired with a bucket, the smaller size allows it to squeeze through doorways and fence gates, and it's easy to load and transport on a trailer. With optional wide tracks, it's still under 44 inches wide with a bucket, and you get a further reduction in ground pressure and an increase in flotation.

TWO ATTACHMENT MOUNTING SYSTEM OPTIONS

BOB-TACH MOUNTING SYSTEM

The well-known Bob-Tach® attachment mounting system supports a comprehensive selection of Bobcat-built attachments including bucket, auger, grapple, pallet fork and more.

COMMON INDUSTRY INTERFACE

The common industry interface (CII) uses the smaller face plate and pin-on-style attachment connection solution for using a variety of attachments including auger, breaker, trencher and more.

SEALED ROLLERS

The mini track loader's rollers are sealed and constantly bathed in oil for continuous lubrication. There's no need for daily roller maintenance and no undercarriage greasing needed.

MOVABLE COUNTERWEIGHTS

Counterweights come standard on the MT100 to increase lifting performance on tough jobs. Counterweights are factory-mounted in the undercarriage, but can be moved to the rear of the machine to meet individual needs.





SMALL ARTICULATED
LOADERS



TURN AND BURN THROUGH HEAVY TASKS.

Heavy-lifting ability meets quick-turn agility with Bobcat small articulated loaders.

Small articulated loaders provide precise maneuverability, with minimal ground disturbance and operator comfort in an easy to use and highly capable yet compact package. The unique design offers excellent operating capacity for a compact machine to enhance productivity on a wide range of jobs.

**CONTACT YOUR DEALER OR VISIT BOBCAT.COM
TO REQUEST A PRICE QUOTE TODAY.**



L23 AND L28

KEY FEATURES

ARTICULATING JOINT

Enables the rear tires of the loader to match the path of the front tires as they turn, resulting in a highly nimble machine that navigates around obstacles with ease. It also limits cuts or tears in the turf when turning or hauling a load.

AUTOMATIC TRACTION MODE

Activates one of two traction modes, High-Traction or Turf-Safe, based on operation to cause the least possible ground disturbance. Optional traction assist allows you to temporarily override the automatic modes and provide power to all wheels.



TELESCOPING LIFT ARM

Reach higher with a lift arm that extends up to 24 inches. An innovative dual-cylinder design keeps the load level as you move the bucket. Available on L28.

LOAD UP WITH OPTIONS.

ADD CAPABILITIES WITH UPGRADE OPTIONS:

- Stay comfortable in cold and wet weather with the optional heated cab enclosure and heated seat.
- Add or remove window panels to further adapt with the season.
- Counterweights add capacity when needed.
- Add protection with rear guard.

ATTACHMENTS

The Bob-Tach attachment mounting system accepts select mini track and standard Bobcat attachments. With the optional Power Bob-Tach® system, you can change non-hydraulic attachments without leaving the comfort of your cab.



Scan to watch video on choosing the right loader: MTL or SAL.



2023 BOBCAT EQUIPMENT SPECIFICATIONS

FOR MORE INFORMATION, SEE YOUR LOCAL
BOBCAT DEALER OR GO TO BOBCAT.COM



MINI TRACK LOADERS

Model	MT100
Engine	
Engine Type	Diesel
Horsepower hp (kW)	24.8 (18.5)
Displacement cu. in. (L)	55.0 (0.9)
Performance	
Rated Operating Capacity lb. (kg)	1000 (453)
Auxiliary Hydraulic Flow gpm (L/min.)	12.0 (45.4)
Travel Speed mph (km/hr.)	4.1 (6.6)
Operating Weight With Bucket lb. (kg)	3390 (1537)
Ground Pressure With Narrow Rubber Tracks psi (bar)	5.2 (0.36)
Dimensions	
Length With Bucket in. (mm)	106.2 (2697)
Width With Bucket in. (mm)	36.0 (914)
Height in. (mm)	54.6 (1387)
Height to Bucket Hinge Pin in. (mm)	80.9 (2056)
Reach at Max. Height in. (mm)	18.6 (472)
Ground Clearance in. (mm)	8.1 (205)
Length of Track on Ground in. (mm)	41.4 (1052)

*Counterweights located in the undercarriage.

SMALL ARTICULATED LOADERS

Model	L23	L28
Engine		
Engine Type	Diesel	Diesel
Horsepower hp (kW)	24.8 (18.5)	24.8 (18.5)
Performance		
Rated Operating Capacity Straight lb. (kg)	1395 (633)	1534 (696)
Rated Operating Capacity Articulated lb. (kg)	1159 (525)	1222 (554)
Auxiliary Hydraulic Flow gpm (L/min.)	12.1 (45.8)	12.1 (45.8)
Travel Speed mph (km/hr.)	8.2 (13.2)	8.3 (13.4)
Operating Weight lb. (kg)	3790 (1719)	4195 (1903)
Bob-Tach Attachment Mounting System	Std	Std
Dimensions		
Length With Bucket in. (mm)	122.4 (3109)	122.4 (3109)
Width in. (mm)	43.2 (1097)	46.5 (1181)
Height With Cab in. (mm)	78.1 (1983)	78.1 (1983)
Wheelbase in. (mm)	47.2 (1199)	47.2 (1199)
Height to Bucket Hinge Pin in. (mm)	85.4 (2169)	(Extended) 104.3 (2650)



MOWERS



Model	ZT2000	ZT3000	ZT3500	WB700	ZS4000	ZT6000	ZT6100	ZT7000
Engine								
Engine Type	Kaw FR691V	Kaw FT730V	Kaw FX730V	Kaw FS600	Kaw FT730V EFI	Kaw FX801V	Kaw FX850V EFI	Kaw FX1000V EFI
Displacement cu. in. (cc)	44.3 (726)	44.3 (726)	44.3 (726)	36.8 (603)	44.3 (726)	52.0 (852)	52.0 (852)	61.0 (999)
Fuel Tank gal. (L)	3.8 (14.3)	3.8 (14.3)	7.8 (29.5)	5.0 (18.9)	6.5 (24.6)	15.0 (56.7)	15.0 (56.7)	15.0 (56.7)
Deck								
Mower Deck	TufDeck Cutting System	TufDeck Pro Cutting System	TufDeck Pro Cutting System	TufDeck Cutting System	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System
Available Widths* in.	42, 48, 52	48, 52, 61	48, 52, 61	36, 48, 52	36, 48, 52, 61	52, 61	61	61, 72
Cutting Height in. (mm)	1.5-4.6 (38-117)	1.5-4.8 (38-121)	1.5-4.8 (38-121)	1.5-4.5 (38-114)	1.5-4.5 (38-114)	1.0-5.5 (25-139)	1.0-5.5 (25-139)	1.0-5.5 (25-139)
Clutch ft.-lb. (N)	105 (556)	125 (556)	125 (556)	105 (467)	200 (889)	225 (1000)	225 (1000)	250 (1112)
Blade Tip Speed	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm	18,645 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
Frame								
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length in. (mm)	76.0 (1930)	76.0 (1930)	79.0 (2006)	78.0 (1981)	64.0 (1625)	83.0 (2108)	83.0 (2108)	87.0 (2209)
Machine Weight (wet) lb. (kg)	752 (341)	817 (370)	832 (377)	690 (312)	1028 (466)	1421 (644)	1464 (664)	1541 (698)
Transmission								
Type	HG ZT-2800 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-2800 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-4400 Hydrostatic Transaxles	HG ZT-4400 Hydrostatic Transaxles	HG ZT-5400 2-Speed Hydrostatic Transaxles
Oil Capacity gal. (qt)	1.0 (4.0)	1.0 (4.0)	1.0 (4.0)	1.0 (4.0)	1.0 (4.0)	1.1 (4.5)	1.1 (4.5)	1.4 (5.9)
Forward Speed mph (km/hr)	7.0 (11.2)	8.0 (12.8)	10.0 (16.0)	6.5 (10.5)	10.5 (16.8)	12.0 (19.3)	12.0 (19.3)	19.0 (30.5)**
Reverse Speed mph (km/hr)	3.0 (4.8)	3.5 (5.6)	3.5 (5.6)	3.0 (4.8)	3.5 (5.6)	4.0 (6.4)	4.0 (6.4)	7.5 (12.0)***
Wheels								
Rear	20 x 10-10	22 x 11-10	23 x 10.5-12	20 x 8	23 x 10.5-12	24 x 10.5-12	24 x 12-12	26 x 12-12
Front	11 x 6-5	13 x 6.5-6	13 x 6.5-6	11 x 6 Semi-pneumatic	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	15 x 6.5-6 Semi-Pneumatic
Operator Platform								
Seat	High Back, Spring Suspension Seat	High Back, EVC and Spring Suspension Seat	High Back, Full Mechanical Suspension Seat	Optional Ride-On Platform	Wide Anti-Vibration and Flip-Up Operator Platform	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat	Extra-High Back, Full Mechanical Suspension Seat
Fore-Aft Adjust	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever	-	Pad Removable for Service	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
Warranty								
	3-year/500-hour	3-year/1,000-hour	3-year/1,000-hour	3-year/2,000-hour	3-year/2,000-hour	3-year/2,000-hour	3-year/2,000-hour	3-year/2,000-hour

* All other specifications are shown for largest available deck width for each platform. Visit Bobcat.com for full specs on all mower models.

** 0-13.0 mph cutting, 13.0-19.0 mph transport

*** 5.0-7.5 mph transport

COMPACT TRACTORS

Model	CT1021 HST	CT1025 HST	CT2025 HST	CT2035 HST	CT2535 HST	CT2040 HST	CT2540 HST	CT4045 HST	CT4050 HST	CT4055 SST	CT4058 HST	CT 5545 E-HST	CT5550 E-HST	CT5555 E-HST	CT5558 E-HST
Engine															
Engine Type	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Horsepower hp (kW)	21.0 (15.7)	24.5 (18.3)	24.5 (18.2)	34.9 (26.0)	34.9 (26.0)	39.6 (29.5)	37.6 (28.0)	44.9 (33.5)	50.3 (37.3)	50.3 (37.3)	57.7 (43.0)	45.0 (33.5)	50.0 (37.5)	55.0 (41.0)	57.7 (43.0)
Displacement cu. in. (L)	61.4 (1.0)	61.4 (1.0)	100 (1.6)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)	111.4 (1.8)
Fuel Tank gal. (L)	6.7 (25.5)	6.7 (25.5)	9.0 (34.1)	9.0 (34.1)	9.0 (34.1)	9.0 (34.1)	9.0 (34.1)	12.7 (48.0)	12.7 (48.0)	11.9 (45.0)	12.7 (48.0)	14.8 (56.0)	14.8 (56.0)	14.8 (56.0)	14.8 (56.0)
Performance															
PTO Horsepower hp (kW)	16.3 (12.1)	18.8 (14.0)	21.8 (16.3)	29.4 (21.9)	29.4 (21.9)	31.9 (23.8)	31.9 (23.8)	32.8 (24.5)	39.3 (29.3)	49.6 (37.0)	45.1 (33.7)	33.9 (25.3)	38.9 (29.0)	43.1 (32.1)	48.3 (36.0)
Travel Speed (forward) mph (km/hr.)	11.1 (17.8)	11.1 (17.8)	9.7 (15.6)	14.4 (23.1)	14.4 (23.1)	14.4 (23.1)	14.4 (23.1)	18.5 (29.7)	18.5 (29.7)	17.5 (28.2)	18.5 (29.7)	17.5 (28.2)	17.5 (28.2)	17.5 (28.2)	17.5 (28.2)
3-Point Lift Capacity lb. (kg)	700 (318)	700 (318)	1631 (740)	1631 (740)	1631 (740)	1631 (740)	1631 (740)	2716 (1232)	2716 (1232)	2716 (1232)	2716 (1232)	3177 (1441)	3177 (1441)	3177 (1441)	3177 (1441)
Rear PTO rpm	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540
Rear PTO System	Indep.	Indep.	Live	Live	Indep.	Live	Indep.	Indep.	Indep.	Indep.	Indep.	Indep.	Indep.	Indep.	Indep.
Enclosed Cab With Heat/AC	-	-	-	-	Std	-	Std	-	-	-	-	Std	Std	Std	Std
Drive System (transmission type)															
Infinite, 2-Range Hydrostatic	Std	Std	-	-	-	-	-	-	-	-	-	-	-	-	-
Infinite, 3-Range Hydrostatic	-	-	Std	Std	Std	Std	Std	Std	Std	-	Std	Std	Std	Std	Std
Synchro (8x8)	-	-	-	-	-	-	-	Opt	Opt	Std	-	-	-	-	-
Manual (9x3)	-	-	Opt	Opt	-	Opt	-	-	-	-	-	-	-	-	-
Dimensions															
Overall Length (with 3-point) in. (mm)	99.3 (2522)	99.3 (2522)	120.9 (3070)	120.9 (3070)	120.9 (3070)	120.9 (3070)	120.9 (3070)	125.5 (3189)	125.5 (3189)	125.5 (3189)	125.5 (3189)	139.6 (3547)	139.6 (3547)	139.6 (3547)	139.6 (3547)
Overall Width (with industrial tires) in. (mm)	46.0 (1161)	46.0 (1161)	63.4 (1610)	63.4 (1610)	63.0 (1600)	63.4 (1610)	63.0 (1600)	69.8 (1722)	69.8 (1722)	69.8 (1722)	69.8 (1722)	74.2 (1885)	74.2 (1885)	74.2 (1885)	74.2 (1885)
Overall Height in. (mm)	87.6 (2225)	87.6 (2225)	91.5 (2324)	91.5 (2324)	91.0 (2311)	91.5 (2324)	91.0 (2311)	97.4 (2473)	97.4 (2473)	97.4 (2473)	97.4 (2473)	94.2 (2393)	94.2 (2393)	94.2 (2393)	94.2 (2393)
Inside Turning Radius in. (mm)	100.0 (2540)	100.0 (2540)	96.5 (2450)	96.5 (2450)	106.2 (2700)	96.5 (2450)	106.2 (2700)	103.5 (2630)	103.5 (2630)	103.5 (2630)	103.5 (2630)	117.6 (2990)	117.6 (2990)	117.6 (2990)	117.6 (2990)
Wheelbase in. (mm)	55.1 (1400)	55.1 (1400)	65.7 (1670)	65.7 (1670)	65.7 (1670)	65.7 (1670)	65.7 (1670)	71.2 (1810)	71.2 (1810)	71.2 (1810)	71.2 (1810)	75.6 (1920)	75.6 (1920)	75.6 (1920)	75.6 (1920)
Ground Clearance in. (mm)	6.3 (160)	6.3 (160)	11.5 (292)	11.5 (292)	12.3 (311)	11.5 (292)	12.3 (311)	15.3 (387)	15.3 (387)	15.3 (387)	15.3 (387)	13.0 (330)	13.0 (330)	13.0 (330)	13.0 (330)
Weight lb. (kg)	1521 (690)	1521 (690)	2634 (1195)	3005 (1363)	3585 (1626)	3005 (1363)	4381 (1987)	3745 (1698)	3745 (1698)	3745 (1698)	3745 (1698)	4685 (2125)	4685 (2125)	4685 (2125)	4685 (2125)

Additional models are available in the 2000 and 4000 platforms. Visit Bobcat.com for details.



UTILITY VEHICLES

Model	UV34 Gas	UV34XL Gas	UV34 Diesel	UV34XL Diesel
Engine				
Horsepower hp (kW)	39.9 (29.7)	39.9 (29.7)	24.5 (18.2)	24.5 (18.2)
Displacement cu. in. (cc)	61.0 (999)	61.0 (999)	55.0 (899)	55.0 (899)
Performance				
Total Vehicle Rated Capacity lb. (kg)**	1900 (862)	2075 (941)	1900 (862)	2075 (941)
Towing Capacity lb. (kg)	2500 (1134)	2500 (1134)	2500 (1134)	2500 (1134)
Cargo Box Load Capacity lb. (kg)	1250 (567)	1250 (567)	1250 (567)	1250 (567)
Travel Speed (high)* mph (km/hr.)	35.0 (56.3)	35.0 (56.3)	35.0 (56.3)	35.0 (56.3)
Turn Radius in. (mm)	110.0 (2794)	154.0 (3911)	110.0 (2794)	154.0 (3911)
Dimensions				
Length in. (mm)	123.0 (3124)	155.0 (3937)	123.0 (3124)	155.0 (3937)
Width in. (mm)	62.0 (1575)	62.0 (1575)	62.0 (1575)	62.0 (1575)
Height in. (mm)	76.0 (1930)	76.0 (1930)	76.0 (1930)	76.0 (1930)
Cargo Box Height in. (mm)	11.5 (292)	11.5 (292)	11.5 (292)	11.5 (292)
Cargo Box Width in. (mm)	54.0 (1372)	54.0 (1372)	54.0 (1372)	54.0 (1372)
Ground Clearance in. (mm)	11.7 (296)	11.7 (296)	11.7 (296)	11.7 (296)
Wheelbase in. (mm)	85.0 (2159)	117.0 (2972)	85.0 (2159)	117.0 (2972)
Operating Weight lb. (kg)	1855 (841)	2085 (945)	1935 (878)	2165 (982)

* Change the top speed of any gas vehicle in increments of 5 mph from 15 mph through 35 mph. 40 mph speed kit available through aftermarket parts. Diesel vehicles can be limited to 25 mph or 15 mph with a speed-limiting kit.

**Total vehicle rated capacity: combined weight of cargo box load, operator, passenger and tow weight if equipped with hitch.



TOOLCAT UTILITY WORK MACHINES

Model	UW53	UW56
Engine		
Engine Type	Diesel	Diesel
Horsepower hp (kW)	61.0 (45.5)	61.0 (45.5)
Performance		
Operating Weight lb. (kg)	5710 (2590)	5680 (2576)
Machine Rated Capacity lb. (kg)*	2200 (998)	2200 (998)
Total Vehicle Rated Capacity lb. (kg) **	4200 (1905)	4200 (1905)
Towing Capacity lb. (kg)	4000 (1814)	4000 (1814)
Travel Speed (low) mph (km/hr.)	8.0 (12.9)	8.0 (12.9)
Travel Speed (high) mph (km/hr.)	16.5 (26.5)	16.5 (26.5)
Travel Speed (reverse) mph (km/hr.)	8.0 (12.9)	8.0 (12.9)
Dimensions		
Length With Bucket in. (mm)	181.0 (4597)	172.1 (4372)
Width Without Bucket in. (mm)	60.0 (1524)	60.0 (1524)
Cab Height in. (mm)	81.0 (2057)	81.0 (2057)
Turning Radius (AWS) in. (mm)	134.6 (3419)	134.6 (3419)
Attachment Systems		
Rated Operating Capacity (ISO) lb. (kg)	1500 (680)	1500 (680)
Lift Height (pivot pin) in. (mm)	83.3 (2116)	83.3 (2116)
Auxiliary Hydraulic Flow gpm (L/min.)	18.8 (71.0)	18.8 (71.0)
High-Flow Option gpm (L/min.)	27.9 (105.0)	27.9 (105.0)
Capacities (cargo box and machine)		
Cargo Box Volume cu. ft. (m ³)	—	18 (0.5)
Cargo Box Dimensions (L x W x H) in. (mm)	—	56.0 x 51.0 x 10.0 (1422 x 1295 x 254)
Box Height (from ground) in. (mm)	—	38.2 (970)
Cargo Box Max. Load lb. (kg)	—	2000 (907)
3-Point Hitch		
3-Point Hitch Capacity lb. (kg)	1775 lb. (806 kg)	—
PTO Horsepower hp (kW)	25.0 (18.6)	—
Storage Bin Capacity (each) lb. (kg)	50 (22)	—

*Machine rated capacity: combined weight of load on lift arm, cargo box load, operator and passenger.

**Total vehicle rated capacity: combined weight of load on lift arm, cargo box load, operator, passenger and tow weight if equipped with a hitch.


Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual equipment will vary based on normal variations in design, manufacturing, operating conditions and other factors.



ACCESSORIZE YOUR NEW FAVORITE MACHINE.

More attachments mean more possibilities.

How can you get the most use from your machine? More attachments and implements will keep your machine working and earning its keep – no matter what your to-do list looks like. Bobcat has been pioneering attachment versatility since the start, and today no other manufacturer makes or offers more attachments and implements.



3-POINT HITCH ADAPTER

Add versatility to your loader or utility work machine.

- Enable the use of Category 1 and 2 implements
- Bob-Tach attachment mounting system offers quick-mounting capabilities
- Adjustable top link for added versatility
- Offers 2-in. receiver for moving trailers

Approved machines: CTL SSL TC



ANGLE BLADE

Level, backfill, grade and remove snow on farms or acreages.

- This implement does not require PTO
- Blade can be rotated 360 degrees and angled to move material from either side
- Use the blade in forward or reverse

Approved machines: CT



AUGER

Dig holes with speed and plumb-line accuracy.

- Choose from varying options that offer a choice between torque and rpm
- Multiple bit types and teeth to match your digging conditions
- Exceptional digging depth paired with Bobcat machines

Approved machines: CTL CWL

MTL MX SAL SSL TL



BACKHOE

Turn your compact tractor into a powerful excavator.

- Use the backhoe for general-purpose digging and trenching
- Sub-frame included to attach to your compact tractor

Approved machines: CT



BALE FORK

Move and load round, uneven or square bales.

- Bale fork length: 40.8 in.
- Two small-diameter forks penetrate the material
- Mounts to standard or heavy-duty pallet fork attachment frame

Approved machines: CT CTL SSL
TC TL



BOX BLADE

Impressive leveling, backfilling and grading.

- Heavy-duty, rear-mount cutting edges are strong enough to cut into gravel, topsoil or other material
- Adjustable and replaceable ripper shanks break up hard ground or compacted soil for easier moving
- Steel cutting blade edges are reversible and replaceable to increase the life of your implement

Approved machines: CT



Scan the QR codes for attachment specifications and additional information on Bobcat.com

SAL = Small Articulated Loader

SSL = Skid-Steer Loader

TC = Toolcat Utility Work Machine

TL = Telehandler

UTV = Utility Vehicle




BOX SPREADER

No matter the season, the spreader has it covered.

- Optimized for efficient and cost-effective use of salt
- Also compatible with sand and salt mix, bagged rock salt, bulk salt, and dry free-flowing sand
- Accessories automatically integrate with the hopper control with no additional wiring
- Accessories include: spill guards, inverted V, vibrator, LED work light, LED strobe light and tarp kit

Approved machines: **TC** **UTV**



BRUSHCAT ROTARY CUTTER

Cut smoothly on uneven terrain.

- Short deck design reduces weight, increases visibility and allows tighter turning
- Self-adjusting, pivoting flotation linkage minimizes the effect of uneven ground and increases first-pass accuracy
- The high cutting speeds and heavy-duty blades maximize inertia to cut and mulch dense vegetation in one pass
- Dual offset motors provide a clean cut every time (66-80 in.)

Approved machines: **CTL** **MTL** **SAL**



SSL **TC**



**ATTACHMENT
EXTENDED
WARRANTY**

Available on most Bobcat attachments. See your dealer for details.



Pictured: Heavy-duty bucket

BUCKETS


- Standard-duty bucket for lighter-duty jobs
- Heavy-duty bucket for high breakout forces
- Severe-duty bucket for extreme applications
- Light-material bucket for snow, mulch or fertilizer
- Combination bucket can be used as a bucket, grapple, dozer and for spreading material
- Rock bucket features gusseted tines and high-steel strength
- Utility bucket for small articulated loaders with see-through back
- Weld-on and bolt-on cutting edges available

Approved machines: **CTL** **CWL** **SAL**

SSL **TC** **TL**



Contact your dealer or have buckets shipped directly to you at shop.Bobcat.com



CHIPPER

Avoid hauling debris. Chip on the spot.

- Ideal for tree pruning and removal and personal property maintenance
- Reduces branch volume 10-to-1
- Remote attachment control safely starts and stops the machine and chipper from outside the loader
- Discharge chute rotates 360 degrees; includes adjustable deflector

Approved machines: **CTL** **SSL** **TC**



DIGGER

Save time with powerful forward and reverse digging.

- Remove rocks and stumps
- Transplant trees and shrubs
- Prune roots, dig trenches or loosen hard-packed soil
- Open frame design for greater visibility from inside the cab
- Replace the shovel; save time and manual labor

Approved machines: **CTL** **MTL**

SAL **SSL**





FLAIL CUTTER

Clear brush and small trees.

- Variable displacement motor matches attachment to carrier's capabilities
- Three cutting heights for a variety of terrains and brush types
- Produces fine mulching action and minimizes bunching of thick brush
- Thick steel deck design protects the attachment and provides maximum strength

Approved machines:

CTL	SSL
TC	TL



FRONT-END LOADER

Does the digging and hauling for you.

- Digging, moving dirt, loading and carrying material
- Easy to attach and remove
- Delivers leading lift capacity and height
- Five models available with standard bucket included
- FL6 (48 in.), FL7 (60 in.), FL8 (60 in.), FL9 (66 in.) and FL9-5 (72 in.)

Approved machines:

CT



GRAPPLE, LOG

Lift and move logs, fallen trees and other heavy-duty material.

- Reinforced tines provide powerful and lasting grip on logs and brush
- Integrated tree pusher assists in felling branches, stems or trees in the intended direction
- Rope bollards maximize stability and control when directing debris during cutting
- Heavy-duty teeth help stabilize logs of all sizes during operation

Approved machines:

MTL	SAL
-----	-----



GRAPPLE, ROOT

Rip through tough land-clearing jobs.

- Curved skeletal tooth design picks up material without driving teeth into the ground
- Dirt falls between teeth to minimize topsoil removal for lighter and fewer loads
- Fully enclosed mounting frame extends wear life by minimizing frame area flexing
- Exclusive inertia-welded cylinder ends deliver strong, smooth operation through hydraulic cushioning at the end of the stroke
- Dual grapple action on larger models offers a secure grip on uneven loads

Approved machines:

CTL	MTL	SAL
SSL	TC	TL



GRAPPLE, UTILITY

Grab onto loose, hard-to-handle material.

- Add to a utility fork, general purpose bucket, low-profile bucket or construction/industrial bucket for more holding ability
- Curved teeth deliver efficient scooping capabilities for the loosest materials
- Forged teeth provide exceptional strength with low weight, increasing carrying capacity
- Quickly and easily add more teeth to efficiently handle smaller materials

Approved machines:

CT	CTL
MTL	SAL
SSL	TC



LANDPLANE

Simplify grading, leveling, aerating, pulverizing and transporting material.

- Use it moving forward for aggressive cutting and sod-peeling
- Travel in reverse for more controlled cutting and finishing work
- Easily loosen stubborn soils with the bi-directional scarifier
- Removable metal grate efficiently breaks clumps

Approved machines:

CTL	CWL
MTL	SAL
SSL	TC



Scan the QR codes for attachment specifications and additional information on Bobcat.com



LANDSCAPE RAKE

Get the perfect finish for your job.

- Rake and collect surface debris while smoothing and leveling soil
- Picks up rocks 3/4 in. and larger and most 1/2 in. rocks
- When full, dump the debris for a completely clean finish
- Hardened teeth offer maximum uptime protection
- Side skis provide adjustable depth control

Approved machines: CTL SSL TC



MOWER – LOADERS

Deliver consistently close, clean cuts.

- Oscillation allows the deck to float, providing a clean cut – even on uneven terrain
- Front-mounted mower eliminates flattened grass before the cut
- Anti-scalping wheel protects blades and mower deck for a longer blade life and consistent cutting height

Approved machines: CTL SSL TC



MOWER, FINISH

Professional results in less time.

- Rear discharge and solid rubber tires are standard
- Three cutting blades
- 1.5-in. to 4.5-in. cutting height
- Available in 60- and 72-in. cutting widths

Approved machines: CT



MOWER, MID-MOUNT

Turn your compact tractor into a mowing powerhouse.

- Rugged, convenient drive-over deck for easy installation and removal
- Three blades travel at high speeds for a clean, smooth cut without skips
- Standard side discharge and solid rubber tires
- 1-in. to 4-in. height adjustment

Approved machines: CT



PALLET FORK

Save time lifting, carrying and moving materials.

- Integrated, walk-through frame provides easier entry and exit
- Pallet fork meets ISO 2330:2002 standards for yield and fatigue tests
- Teeth available in 42- and 48-in. lengths; bale forks available in 40.8-in. length
- Hydraulic fork positions tines without the need to leave the cab, saving time and effort

Approved machines: CT CTL CWL SAL SSL TC TL





QUICK HITCH

Connect implements in seconds.

- Saves time and makes implement hook-up easier
- Back up your tractor, lift up your quick-hitch-compatible implement and secure the top levers

Approved machines: CT



REAR BALLAST BOX

Maximize lifting capacities.

- Easily removed when you plan to use other implements
- Compact size enables convenient storage when not in use

Approved machines: CT



ROTARY CUTTER

Clear pastures, ditches and overgrown paths.

- Ideal for clearing undeveloped property, trails and ditches
- 1.5- to 9-in. adjustable cutting height
- Available in 48-, 60- and 72-in. cutting widths

Approved machines: CT



SEEDER

Precisely place seed at the perfect depth and spacing.

- Covers over 2 acres per hour
- Ground-driven unit seeds directly into soil for better germination and precise coverage
- Front roller firms ground, presses small rocks beneath the surface and plants the seed into the seedbed
- Second roller gently forms soil around seed for optimum seed-to-soil contact

Approved machines: CT CTL SSL TC



SNOW BLADE

Unrivalled speed for light and moderate snow removal.

- Optional end wing kit converts some models into a snow pusher
- Heavy-duty snow blade offers 5 degrees of oscillation left or right for cutting-edge maneuverability

Approved machines: CT CTL CWL
MTL SAL SSL
TC TL



Scan the QR codes for attachment specifications and additional information on Bobcat.com

SAL = Small Articulated Loader

SSL = Skid-Steer Loader

TC = Toolcat Utility Work Machine

TL = Telehandler

UTV = Utility Vehicle



SNOW V-BLADE

Clear deep drifts of snow without leaving the cab.

- Scoop blade collects and holds snow for transportation
- V-blade quickly cuts initial pathways through deep, heavy or hard-packed snow
- Angle blade quickly and easily moves snow left or right
- Straight blade gives maximum width for piling snow and cleaning light snow cover

Approved machines: CTL SAL

SSL TC

TL



SNOWBLOWER – LOADERS

Throw and blow snow to clear a path.

- Increased intake height and bigger auger draw in more snow
- The rounded intake provides a smoother surface to roll the snow into the feed impeller rather than pushing it, minimizing clogging and improving snow flow
- Aggressive auger teeth – painted orange for improved visibility – easily break up and tear through packed snow and ice chunks
- Direct-drive sprocket rotation improves the performance, durability and ease of maintenance of the snowblower chute
- A reversible and replaceable cutting edge bites into hard ice and packed snow, and is designed for long life
- Visibility slots to see the cutting edge
- Adjustable full-length skid shoes to enhance ground contact
- Available in standard, high-flow and super-flow configurations

Approved machines: CTL MTL SAL SSL TC



SNOWBLOWER, 3-POINT – COMPACT TRACTOR

Powerful, productive and easy to operate.

- Perfect for clearing driveways, sidewalks or parking areas
- Manual chute rotator standard
- Hydraulic chute rotator optional
- Available in 50-, 60-, 66- and 74-in. widths

Approved machines: CT



SNOWBLOWER, FRONT MOUNT – COMPACT TRACTOR

Powerful, productive and easy to operate.

- Perfect for clearing driveways, sidewalks or parking areas
- Hydraulic chute rotator standard

Approved machines: CT



SNOW PUSHER

Achieve maximum snow removal speed and efficiency.

- Easily and efficiently clear big property areas
- Cover larger areas without frequent stops
- Accomplish safe and efficient snow removal on decorative or sensitive surfaces
- Moldboard flotation and oscillation keep snow pusher in contact with the ground without damaging equipment or property

Approved machines: CTL CWL

SSL TC TL





SNOW PUSHER PRO

Built for the efficiency of a commercial snow remover.

- This attachment is an angle snow blade and snow pusher all in one
- Compatible with the following compact loader models: S740, S770, S850, T595, T650, T740, T770, T870 and the T550
- Optional 200 lb. counterweight sold separately

Approved machines:

CTL	CWL
SAL	SSL
TC	TL



SOIL CONDITIONER

Lay a good foundation for growth.

- Rocks and other debris are windrowed to the edge of the jobsite for easy cleanup and removal
- Carbide-tipped teeth offer maximum ground penetration
- Oscillating bolster on 72- and 84-in. models
- Front bolster offers better grade control and adjusts to create more room for transportation or storage
- High-flow models available

Approved machines:

CTL	MTL	SAL
SSL	TC	TL



TILLER - LOADERS

Tear through clumps and hardened materials.

- Bi-directional rotation allows top-cutting and under-cutting when operating in either direction
- Offset mounting enables tilling beside sidewalks, curbs and buildings, increasing capabilities
- Optional adjustable skid shoes deliver depth control at 2-, 4- or 6-in. depths
- Hardened, double-edge tines break through materials to loosen soil

Approved machines:

CTL	MTL	SAL
SSL	TC	TL



TILLER, 3-POINT - COMPACT TRACTOR

Easy and efficient soil preparation.

- Break ground, prepare soil for planting, amend soil or remove weeds between tree rows
- Forward or reverse rotation
- Adjustable skid shoes for various working depths up to 7 in.
- Available in 48-, 60- and 72-in. tilling widths

Approved machines:

CT




TINE RAKE

Easily collects debris and levels soil.

- Can be angled or reversed
- High-carbon tines are individually replaceable for easy, low-cost maintenance
- Available in 60-, 72- and 84-in. widths

Approved machines:

CT

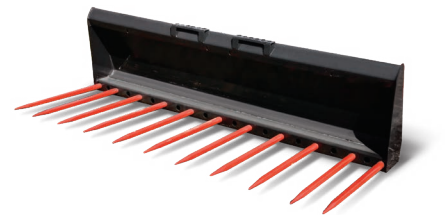

UTILITY FORK

Handle bundled material, loose straw, manure and other hard-to-grab materials.

- Utility fork teeth are replaceable
- For added versatility, pair with the utility grapple

Approved machines:

CT	MTL
SAL	TC



Scan the QR codes for attachment specifications and additional information on Bobcat.com

SAL

 = Small Articulated Loader

SSL

 = Skid-Steer Loader

TC

 = Toolcat Utility Work Machine

TL


 = Telehandler

UTV

 = Utility Vehicle



BOBCATALOG
6845 WINNETKA CIR
BROOKLYN PARK, MN 55428

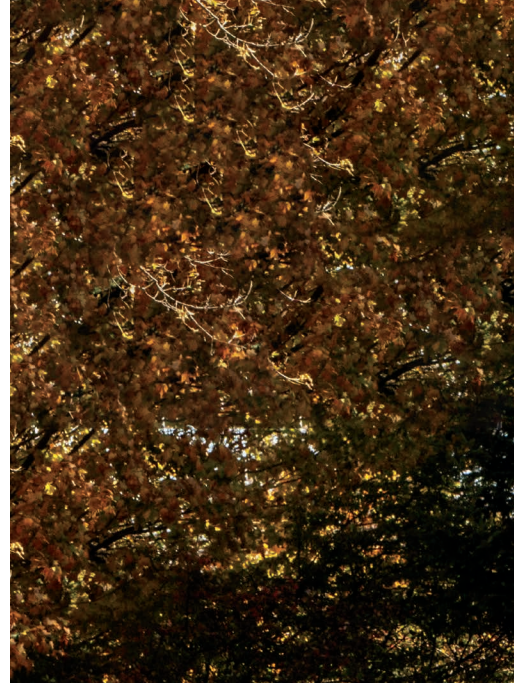

EVERY PART IS ALL BOBCAT.

You rely on Bobcat equipment to maintain your property – so demand complete performance from every part. Nothing else offers the durability, reliability and quality of Bobcat parts. Get them at your local dealer.



Bobcat



Bobcat

SCAN TO FIND YOUR
LOCAL DEALER.



Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.

Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries.

©2022 Bobcat Company. All rights reserved.

BC-2023H (11/22)
EP-280M-1122-84375-F