



SPREADER PRODUCT GUIDE: 2024-25

BEST SERVED COLD

# SPREADERS

WORK AHEAD OF EVERY STORM. STAY ON TOP OF EVERY JOB.  
GET MORE DONE EVERY DAY.



# IS YOUR FLEET STORM READY?

There is no feeling like an incoming storm. The air dampens. The clouds close. The sky darkens. And the focus becomes clear. Because for you—snow and ice pros—this isn't just some storm. It's go time.

Since 1948, Fisher Engineering has built products that capitalize on that feeling. And this winter, we're proud to present our full line of ice control equipment for operators of every kind. Now let's get your fleet ready for the storm—starting with products that take on the ice.



HOPPERS

Commercial operators servicing multiple large, complex properties with de-icing services utilizing bulk materials.



TAILGATES

Commercial operators and private users servicing smaller properties or areas of focus with bagged de-icing materials.





# HOPPER SPREADERS





# TEMPEST™ POLY HOPPERS

CORROSION-RESISTANT CONSTRUCTION  
KEEPS YOU EFFICIENT

## BEST SUITED FOR:

Commercial operators working multiple job sites, especially in wet and coastal regions where rust is prevalent and de-icing materials need to be kept covered.

## VEHICLE COMPATIBILITY:

3/4 and 1-Ton Pick Up Trucks, Dump Body Trucks, and Flatbed Trucks.

## WHAT THIS MEANS FOR YOU:

The all-new TEMPEST Poly Hoppers bring an updated poly hopper tub and enhanced molded lid design to the hopper legacy, meeting the demands of today's operator. These models are made of corrosion-resistant polyethylene with a precise geometry that promotes even material flow and two material delivery options.

**MODEL EXPLANATION:** **P220A**

Hopper Material | Hopper Capacity | Material Delivery System

(See page 20 for full product specs)

## SIGNATURE FEATURES



### ■ POLY CONSTRUCTION

High-density polyethylene construction fights rust and corrosion, ideal for spreading salt and other de-icing materials in harsh environments. The hopper tub geometry ensures de-icing material is evenly delivered to the chain or auger, allowing even material unloading and smooth flow with each load.



### ■ STAND ON END STORAGE

A special design allows the hopper to stand on end for easier storage in the off-season. This also allows for easier installation into the truck bed.



### ■ INTERLOCKING POLY LIDS

Standard hopper lids have molded channels for moisture runoff. Pockets at the end of the lid allow a 2×4 to or shovel handle to be inserted for leverage and easy opening.



### ■ CHOICE OF MATERIAL DELIVERY

Operations can choose the delivery system best suited for their de-icing program. The all-new patented HELIXX™ auger delivery system (*shown*) is optimized to operate in the target range for the even spread of rock salt. The heavy-duty pintle chain delivery system is optimized for thick, heavy materials like sand and salt/sand mix.





# TEMPEST™ P150C | P150A

## POLY HOPPER SPREADERS

These all-new poly hoppers offer 1.5 cu yd of capacity for pickup trucks. Smooth, even spreading allows de-icing services to be delivered quickly and efficiently. Durable, corrosion-resistant, and versatile - they're ideal for commercial applications.

MATERIAL COMPATIBILITY:  
HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY:	1.5 cu yd (1.15 cu m)
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MINIMUM BED LENGTH:	90" (228.6 cm)



# TEMPEST P220C | P220A

## POLY HOPPER SPREADERS

Stepping up in size, these models offer 2.2 cu yd of capacity for use with pickup trucks. Their corrosion-resistant construction makes them perfect for commercial applications. De-icing material is delivered in a smooth and consistent arc to ensure an even spread for maximum productivity and efficiency.

MATERIAL COMPATIBILITY:  
HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY:	2.2 cu yd (1.68 cu m)
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MINIMUM BED LENGTH:	90" (228.6 cm)





# TEMPEST™ STAINLESS STEEL HOPPERS

HEAVY-DUTY EQUIPMENT TO GET YOU AHEAD

## BEST SUITED FOR:

Commercial operators working multiple job sites where durability and high-capacity performance are non-negotiable.

## VEHICLE COMPATIBILITY:

Pickup Trucks, Dump Body Trucks, Flatbed Trucks.

## WHAT THIS MEANS FOR YOU:

The TEMPEST Stainless Steel Hopper is tougher than nails. Its stainless steel construction resists impact and corrosion, allowing smooth material flow with minimal wear, making it ideal for heavy-duty commercial applications. The geometry promotes even material flow with a choice of material delivery systems.

## MODEL EXPLANATION:

**S220A**

Hopper Material | Hopper Capacity | Material Delivery System

(See page 20 for full product specs)

## SIGNATURE FEATURES



### STAINLESS STEEL CONSTRUCTION

Crafted with heavy-duty stainless steel for unmatched durability and corrosion resistance in the storm.




### DUAL ELECTRIC MOTORS

Take control of every job with independent motors for precise control over auger and spinner functions.



### VARIABLE SPEED CONTROL

Enhanced dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency.

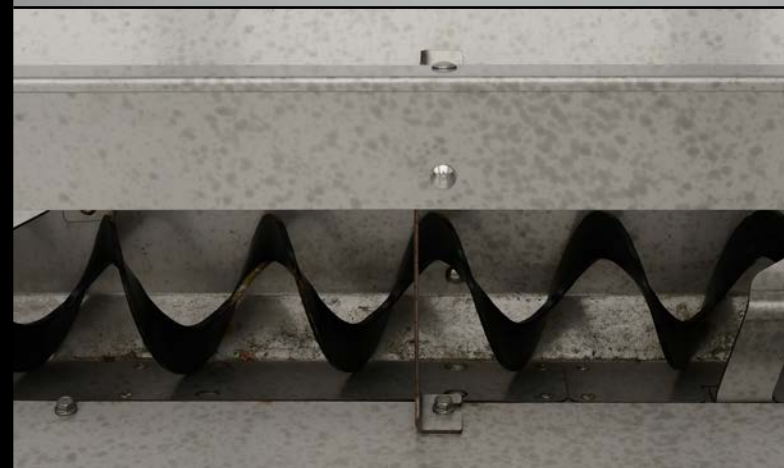

### CHOICE OF MATERIAL DELIVERY

Operations can choose the delivery system best suited for their de-icing program. The all-new patented HELIXX™ auger delivery system (*shown*) is optimized to operate in the target range for the even spread of rock salt. The heavy-duty pintle chain delivery system is optimized for thick, heavy materials like sand and salt/sand mix.



# TEMPEST™ COMPACT S035C/S035A & S070C/S070A

## STAINLESS STEEL HOPPERS

These compact models fit in half-ton trucks with room to haul extra de-icing material or sidewalk management equipment. They are ideal for operators with smaller, more compact areas that they service. (S070C model shown.)

MATERIAL COMPATIBILITY: HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	0.35 cu yd (0.27 cu m)   0.70 cu yd (0.54 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	0.6 cu yd (0.46 cu m) 1.2 cu yd (0.92 cu m)
VEHICLE COMPATIBILITY:	Compact Trucks   ½-Ton Pickup Trucks
MINIMUM BED LENGTH:	30" (76.20 cm)   44" (111.76 cm)




# TEMPEST S150C / S150A

## STAINLESS STEEL HOPPERS

Stepping up, the S150 fits into standard pickup trucks with 76" or more of bed space. With 1.5 cu yd of capacity, this model consistently delivers for commercial operators.

MATERIAL COMPATIBILITY: HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	1.5 cu yd (1.15 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	2.0 cu yd (1.53 cu m)
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MINIMUM BED LENGTH:	76" (193.04 cm)

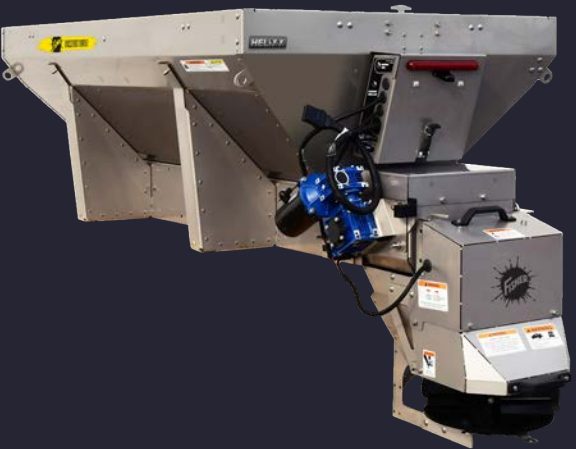


# TEMPEST S220C/S220A

## STAINLESS STEEL HOPPERS

High spreading performance from a unit that fits 3/4- and 1-ton pickup trucks. This model meets the needs of commercial operators with multiple large properties to cover, using a standard pickup.

MATERIAL COMPATIBILITY: HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	3.0 cu yd (2.29 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	4.0 cu yd (3.06 cu m)
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pick up Trucks
MINIMUM BED LENGTH:	90" (228.6 cm)

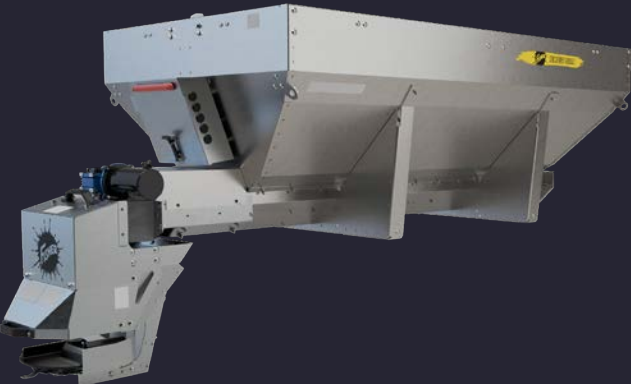

# TEMPEST S300C/S300A

## STAINLESS STEEL HOPPERS

For fleets with dump body and flatbed trucks, this model comes highly recommended. With 3.0 cubic yards of capacity, operators seamlessly shift from one large property to the next.

MATERIAL COMPATIBILITY: HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	3.0 cu yd (2.29 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	4.0 cu yd (3.06 cu m)
VEHICLE COMPATIBILITY:	Dump Body or Flatbed Trucks
MINIMUM BED LENGTH:	90" (228.6 cm)



# TEMPEST S400C/S400A

## STAINLESS STEEL HOPPERS

For dump body and flatbed trucks seeking more, this model offers 4.0 cubic yards of capacity to cover more acreage in between fill ups.

MATERIAL COMPATIBILITY: HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	4.0 cu yd (3.06 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	5.0 cu yd (3.82 cu m)
VEHICLE COMPATIBILITY:	Dump Body or Flatbed Trucks
MINIMUM BED LENGTH:	96" (243.84 cm)



# TEMPEST S500C / S500A

## STAINLESS STEEL HOPPERS

The biggest and boldest: S500C/S500A Spreaders bring 5.0 cubic yards of capacity, maximizing the de-icing impact of your dump body and flatbed fleet, increasing the acreage each operator can treat in between fill ups.

MATERIAL COMPATIBILITY: HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX	
HOPPER CAPACITY:	5.0 cu yd (3.82 cu m)
HOPPER CAPACITY W/ EXTENSION COLLAR:	6.0 cu yd (4.59 cu m)
VEHICLE COMPATIBILITY:	Dump Body or Flatbed Trucks
MINIMUM BED LENGTH:	96" (243.84 cm)





# TRILOGY DEFENSE

PRE-WET AND DIRECT LIQUID APPLICATION SYSTEM

**BEST SUITED FOR:**

Professionals needing advanced de-icing capabilities, including areas where snowfall is low but slick surfaces are relentless.

**SPREADER COMPATIBILITY:**

Compatible with all TEMPEST™ Spreaders.

**COMPATIBLE MATERIAL TYPES:**

Liquid de-icing solutions such as brine, calcium chloride solutions, and other premium solutions.

**WHAT THIS MEANS FOR YOU:**

The Trilogy Defense System adds onto your FISHER Spreader, widening your options for snow and ice removal.

- Option 1: Standard material application, without liquid.
- Option 2: Direct liquid application.
- Option 3: Material and liquid combination, also known as Pre-Wet.

Whether you're preparing for a storm or cleaning up the aftermath, the best modern tools are at the ready, all built to work together.



## SIGNATURE FEATURES

■ PRE-WET AND ANTI-ICING CAPABILITIES



The Trilogy Defense system features a spray tube that applies liquid directly to the granular material as it enters the pre-wet mixing chamber or nozzles that can spray liquid brine directly on the surface for treatment.

*(Direct liquid application shown.)*

■ 7 GALLON/MINUTE SPREAD RATE



12-volt motor and pump combination provide a consistent spray rate for low maintenance and reliable performance.

■ MANUAL CONTROL VALVE



A manual lever on the pump box allows the operator to easily switch between pre-wet or direct liquid application mode when the accessory system is active.

■ INTEGRATED CONTROL



Reduce cab clutter and enhance operator efficiency with the on/off accessory control seamlessly integrated into the TEMPEST spreader control.





# SPREADER ACCESSORIES

ESSENTIAL TOOLS THAT GROW WITH YOU

Explore a variety of accessories designed to enhance the functionality of your FISHER spreaders. From control systems to material storage solutions, these products ensure you have everything needed to tailor your hopper's performance to your operation's unique needs.

## FOR CHAIN DRIVEN UNITS

SAFETY ACCESSORIES	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
STROBE LIGHT KIT:	■	■	■	■	■	■	■	■	■
WORK LIGHT KIT:	■	■	■	■	■	■	■	■	■
SECONDARY WORK LIGHT KIT:	■	■	■	■	■	■	■	■	■
LICENSE PLATE KIT:	■	■	STD	STD	STD	STD	STD	STD	STD
MATERIAL FLOW & PERFORMANCE	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
INVERTED V:	■	■	■	■	■	■	STD	STD	STD
CHUTE EXTENSION KIT:			■	■	■	STD	STD	STD	STD
VIBRATOR KIT:	■	■	■	■	■	■	■	■	■
FEEDGATE KIT:			■	■	■	■	■	■	■
CAPACITY EXPANSION	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
EXPANSION COLLAR:	■	■	■		■		■	■	■
SPILL GUARDS:	■	■	■		■		■	■	■
REARVIEW MATERIAL MONITORING CAMERA:	■	■	■	■	■	■	■	■	■
TARP KIT:	■	■	■		■				
ROLL TARP COVER:							■	■	■
CENTRAL POINT GREASE KIT:			■	■	■	■	■	■	■
OPERATOR CUSTOMIZATION	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
SPREADER CONTROL ADAPTER PLATE:	■	■	■	■	■	■	■	■	■
CENTRAL CUP HOLDER MOUNT:	■	■	■	■	■	■	■	■	■

## ACCESSORY CATEGORIES

### SAFETY ACCESSORIES:

Enhance the visibility of your ice control equipment when it's on the job with assorted lighting options and when traveling between jobs with road safety accessories.

### CAPACITY EXPANSION:

Expand the capacity of your hopper to grow with your business.

### MATERIAL FLOW & PERFORMANCE:

Keep your de-icing material dry and maximize its even flow and spread for maximum performance. Adapt to the unique demands of your materials and applications.

### OPERATOR CUSTOMIZATION

Allow your operators to customize the spreader control experience in the cab.

## FOR AUGER DRIVEN UNITS

SAFETY ACCESSORIES	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
STROBE LIGHT KIT:	■	■	■	■	■	■	■	■	■
WORK LIGHT KIT:	■	■	■	■	■	■	■	■	■
SECONDARY WORK LIGHT KIT:	■	■	■	■	■	■	■	■	■
LICENSE PLATE KIT:	■	■	STD	STD	STD	STD	STD	STD	STD
MATERIAL FLOW & PERFORMANCE	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
INVERTED V:	■	■	STD	STD	STD	STD	STD	STD	STD
CHUTE EXTENSION KIT:			■	■	STD	STD	STD	STD	STD
VIBRATOR KIT:	■	■	■	■	■	■	■	■	■
CAPACITY EXPANSION	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
EXPANSION COLLAR:	■	■	■		■		■	■	■
SPILL GUARDS:	■	■	■		■		■	■	■
REARVIEW MATERIAL MONITORING CAMERA:	■	■	■	■	■	■	■	■	■
TARP KIT:	■	■	■		■				
ROLL TARP COVER:							■	■	■
CENTRAL POINT GREASE KIT:			■	■	■	■	■	■	■
OPERATOR CUSTOMIZATION	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
SPREADER CONTROL ADAPTER PLATE:	■	■	■	■	■	■	■	■	■
CENTRAL CUP HOLDER MOUNT:	■	■	■	■	■	■	■	■	■





PINPOINT YOUR HOPPER

## TEMPEST™ POLY HOPPER

*THE NEW HOPPER ON THE BLOCK, TURNING HEADS & GETTING WORK DONE.*

All-new this season, the TEMPEST Hopper legacy continues with polyethylene construction, specifically built to fight off rust and corrosion found in de-icing. For wet and coastal conditions especially, this material remains unphased through the elements.

The poly hopper models feature standard, interlocking lids that protect de-icing materials from moisture and the elements. An enhanced design incorporates special channels that discard excess snow, water, and ice for easy opening and closing.

## TEMPEST STEEL HOPPERS

*THE ULTIMATE WORKHORSE, TRIED & TRUE BY FISHER NATION.*

The TEMPEST Hoppers that started it all. They're as tough as they come, and unbeatable in durability and strength. Stainless steel construction stands up strong against bumps, bruises, and scrapes on the job, while maintaining structural integrity no matter what winter throws at you.

The riveted construction of the hopper allows for easier serviceability when the hopper makes contact with an unseen obstacle while in reverse.



TEMPEST™ S035C/S035A

COMPACT STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	12" Diameter
VEHICLE COMPATIBILITY:	Compact Trucks	APPROXIMATE WEIGHT (EMPTY):	235 lb   192 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	57" x 38" x 46"   52.75" x 38" x 45.5"
CAPACITY (VOLUME):	.35 cu yd	HOPPER DIMENSIONS (LxWxH):	30" x 38" x 26"   30" x 38" x 25.75"
CAPACITY (WEIGHT):	750 lb	BODY SIDE LENGTH:	30"
CAPACITY (EXTENSION COLLAR):	0.60 cu yd	MINIMUM BED LENGTH:	30"
SPREAD WIDTH:	Up to 36'	MATERIAL DELIVERY DIMENSIONS:	15.5" Chain   4" Diameter Auger

TEMPEST S070C/S070A

COMPACT STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	12" Diameter
VEHICLE COMPATIBILITY:	1/2-ton & Light Duty Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	420 lb   337 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	81" x 43" x 46"
CAPACITY (VOLUME):	0.7 cu yd	HOPPER DIMENSIONS (LxWxH):	81" x 42.75" x 45"
CAPACITY (WEIGHT):	1,500 lb	BODY SIDE LENGTH:	54"
CAPACITY (EXTENSION COLLAR):	1.2 cu yd	MINIMUM BED LENGTH:	44"
SPREAD WIDTH:	Up to 36'	MATERIAL DELIVERY DIMENSIONS:	15.5" Wide Chain   4" Diameter auger

TEMPEST S150C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	530 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	107" x 50" x 51.75"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	84.5" x 50" x 32"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COLLAR):	2.0 cu yd	MINIMUM BED LENGTH:	76"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST S150A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	500 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	111.5" x 50" x 50.5"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	84.5" x 50" x 32"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COLLAR):	2.0 cu yd	MINIMUM BED LENGTH:	76"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter

TEMPEST™ S220C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	580 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	119.25" x 50" x 55.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR):	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   15.5" Wide

TEMPEST S220A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	550 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   6" Diameter

TEMPEST S300C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	750 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	120.25" x 70" x 72.75"
CAPACITY (VOLUME):	3.0 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 70" x 41"
CAPACITY (WEIGHT):	6,480 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	4.0 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST S300A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	700 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	3.0 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 70" x 41"
CAPACITY (WEIGHT):	6,480 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	4.0 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter



COMPREHENSIVE - *IMPERIAL SYSTEM*

HOPPER SPREADER TECHNICAL SPECS

TEMPEST™ S400C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	820 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	128.75" x 70" x 75.50"
CAPACITY (VOLUME):	4.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 43.75"
CAPACITY (WEIGHT):	8,640 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	5.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST™ S400A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	770 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	129" x 70" x 74.25"
CAPACITY (VOLUME):	4.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 43.75"
CAPACITY (WEIGHT):	8,640 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	5.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   6" Diameter

TEMPEST™ S500C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	910 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	126.25" x 70" x 82.25"
CAPACITY (VOLUME):	5.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 50.5"
CAPACITY (WEIGHT):	10,800 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	6.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST™ S500A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	850 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	1129" x 70" x 81"
CAPACITY (VOLUME):	5.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 50.5"
CAPACITY (WEIGHT):	10,800 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	6.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter

TEMPEST™ P150C

POLY HOPPER  
SPREADER

HOPPER CONSTRUCTION:	Polyethylene	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	723 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	108.25" x 63.50" x 51.75"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	96.50" x 63.50" x 46"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COLLAR):	2.0 cu yd	MINIMUM BED LENGTH:	74"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST™ P150A

POLY HOPPER  
SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	673 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	108.25" x 63.50" x 51.75"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	96.50" x 63.50" x 46"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COLLAR)	2.0 cu yd	MINIMUM BED LENGTH:	74"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   6" Diameter

TEMPEST™ P220C

POLY HOPPER  
SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	823 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	119.25" x 50" x 55.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

TEMPEST™ P220A

POLY HOPPER  
SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	793 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter



TEMPEST™ S035C/S035A

COMPACT STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	30.5 cm Diameter
VEHICLE COMPATIBILITY:	Compact Trucks	APPROXIMATE WEIGHT (EMPTY):	106.59 kg   87.1 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	144.8 × 96.5 × 116.8   134.0 × 96.5 × 115.6
CAPACITY (VOLUME):	0.27 cu m	HOPPER DIMENSIONS (LxWxH):	76.2 × 96.5 × 66.0   76.2 × 96.5 × 65.4
CAPACITY (WEIGHT):	340.2 kg	BODY SIDE LENGTH:	76.2 cm
CAPACITY (EXTENSION COLLAR):	0.46 cu m	MINIMUM BED LENGTH:	76.2 cm
SPREAD WIDTH:	0.97 m	MATERIAL DELIVERY DIMENSIONS:	39.37 cm Chain   10.2 cm Diameter Auger

TEMPEST S070C/S070A

COMPACT STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	30.5 cm Diameter
VEHICLE COMPATIBILITY:	1/2-ton & Light Duty Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	190.5 kg   152.9 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	205.7 × 109.2 × 116.8   205.7 × 108.6 × 114.3
CAPACITY (VOLUME):	0.54 cu m	HOPPER DIMENSIONS (LxWxH):	137.2 × 109.2 × 71.1   138.4 × 108.6 × 69.2
CAPACITY (WEIGHT):	680.39 kg	BODY SIDE LENGTH:	137.2 cm
CAPACITY (EXTENSION COLLAR):	0.92 cu m	MINIMUM BED LENGTH:	137.2 cm
SPREAD WIDTH:	10.97 m	MATERIAL DELIVERY DIMENSIONS:	39.37 cm Chain   10.2 cm Diameter Auger

TEMPEST S150C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	340 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	305.4 cm x 177.8 cm x 184.8 cm
CAPACITY (VOLUME):	2.29 cu m	HOPPER DIMENSIONS (LxWxH):	245.11 cm x 177.8 cm x 104.1 cm
CAPACITY (WEIGHT):	2,939 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR):	3.06 cu m	MINIMUM BED LENGTH:	228.6 cm
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide

TEMPEST S150A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	140.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	227 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	283.2 cm x 127 cm x 128.3 cm
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH):	214.6 cm x 127 cm x 81.3 cm
CAPACITY (WEIGHT):	1,470 kg	BODY SIDE LENGTH:	2.13 m
CAPACITY (EXTENSION COLLAR):	1.53 cu m	MINIMUM BED LENGTH:	193 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   15.25 cm Diameter

TEMPEST™ S220C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	268 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	302.9 cm x 127 cm x 141.0 cm
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LxWxH):	245.1 cm x 127 cm x 90.8 cm
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR):	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide

TEMPEST S220A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	249 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	312.4 cm x 177.8 cm x 181.6 cm
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LxWxH):	245.1 cm x 127 cm x 90.8 cm
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR)	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   15.25 cm Diameter

TEMPEST S300C

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	240 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	271.8 cm x 127 cm x 131.4 cm
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH):	214.6 cm x 127 cm x 81.3 cm
CAPACITY (WEIGHT):	1,470 kg	BODY SIDE LENGTH:	2.13 m
CAPACITY (EXTENSION COLLAR)	1.53 cu m	MINIMUM BED LENGTH:	193 cm
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide

TEMPEST S300A

STAINLESS STEEL  
HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	318 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	312.4 cm x 177.8 cm x 181.6 cm
CAPACITY (VOLUME):	2.29 cu m	HOPPER DIMENSIONS (LXWXH):	245.11 cm x 177.8 cm x 104.1 cm
CAPACITY (WEIGHT):	2,939 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR)	3.06 cu m	MINIMUM BED LENGTH:	228.6
SPREAD WIDTH:	10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   15.25 cm Diameter



TEMPEST™ S400C			STAINLESS STEEL HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	372 kg		
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LXWXH):	3270 cm x 177.8 cm x 191.8 cm		
CAPACITY (VOLUME):	3.06 cu m	HOPPER DIMENSIONS (LxWxH):	275.6 cm x 177.8 cm x 111.1 cm		
CAPACITY (WEIGHT):	3,919 kg	BODY SIDE LENGTH:	2.74 m		
CAPACITY (EXTENSION COLLAR):	3.82 cu m	MINIMUM BED LENGTH:	243.8 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide		

TEMPEST™ S400A			STAINLESS STEEL HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	349 kg		
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH):	3277 cm x 177.8 cm x 188.6 cm		
CAPACITY (VOLUME):	3.06 cu m	HOPPER DIMENSIONS (LxWxH):	275.6 cm x 177.8 cm x 111.1 cm		
CAPACITY (WEIGHT):	3,919 kg	BODY SIDE LENGTH:	2.74 m		
CAPACITY (EXTENSION COLLAR):	3.82 cu m	MINIMUM BED LENGTH:	243.8 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   15.25 cm Diameter		

TEMPEST™ S500C			STAINLESS STEEL HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	413 kg		
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LXWXH):	320.7 cm x 177.8 cm x 208.9 cm		
CAPACITY (VOLUME):	3.82 cu m	HOPPER DIMENSIONS (LXWXH):	275.6 cm x 177.8 cm x 128.3 cm		
CAPACITY (WEIGHT):	4,899 kg	BODY SIDE LENGTH:	2.74 m		
CAPACITY (EXTENSION COLLAR):	4.59 cu m	MINIMUM BED LENGTH:	243.8 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide		

TEMPEST™ S500A			STAINLESS STEEL HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	386 kg		
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH):	327.7 cm x 177.8 cm x 205.7 cm		
CAPACITY (VOLUME):	3.82 cu m	HOPPER DIMENSIONS (LXWXH):	275.6 cm x 177.8 cm x 128.3 cm		
CAPACITY (WEIGHT):	4,899 kg	BODY SIDE LENGTH:	2.74 m		
CAPACITY (EXTENSION COLLAR):	4.59 cu m	MINIMUM BED LENGTH:	243.8 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   15.25 cm Diameter		

TEMPEST™ P150C			POLY HOPPER SPREADER		
HOPPER CONSTRUCTION:	Polyethylene	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	328 kg		
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	275.0 cm x 161.3 cm x 131.4 cm		
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH):	245.1 cm x 161.3 cm x 116.8 cm		
CAPACITY (WEIGHT):	1,469.9 kg	BODY SIDE LENGTH:	2.13 m		
CAPACITY (EXTENSION COLLAR):	1.53 cu m	MINIMUM BED LENGTH:	188.0 cm		
SPREAD WIDTH:	Salt: Up to10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide		

TEMPEST™ P150A			POLY HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	305.3 kg		
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH):	275.6 cm x 161.3 cm x 131.4 cm		
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH):	245.1 cm x 161.3 cm x 116.8 cm		
CAPACITY (WEIGHT):	1,469.9 kg	BODY SIDE LENGTH:	2.13 m		
CAPACITY (EXTENSION COLLAR)	1.53 cu m	MINIMUM BED LENGTH:	188.0 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   15.25 cm Diameter		

TEMPEST™ P220C			POLY HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	373.3 kg		
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LXWXH):	295.3 cm x 161.3 cm x 141.0 cm		
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LXWXH):	245.1 cm x 161.3 cm x 130.8 cm		
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH:	2.44 m		
CAPACITY (EXTENSION COLLAR)	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   39.37 cm Wide		

TEMPEST™ P220A			POLY HOPPER SPREADER		
HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter		
VEHICLE COMPATIBILITY:	Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	360 kg		
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH):	295.3 cm x 161.3 cm x 141.0 cm		
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LXWXH):	245.1 cm x 161.3 cm x 130.8 cm		
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH:	2.44 m		
CAPACITY (EXTENSION COLLAR)	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm		
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS:	HELIXX™ Auger   15.25 cm Diameter		





# TAILGATE SPREADERS





# TAILGATE SPREADERS

RIGHT-SIZED FOR BAGGED DE-ICER APPLICATION

## BEST SUITED FOR:

Commercial and residential operators with pickup trucks that need to treat small areas or provide touch up services.

## VEHICLE COMPATIBILITY:

Fits wide range of truck models;  
(see specs on page 38.)

## WHAT THIS MEANS FOR YOU:

For small properties, touch-up jobs, and at-home use, tailgate spreaders are the answer. Easy to fill with a variety of bagged de-icers, tailgate spreaders attach easily and leave the truck bed free to haul additional material or equipment.

(See page 38 for full product specs)

## SIGNATURE FEATURES



### CONSERVE SPACE

Mounting the spreader on your truck's tailgate keeps the truck bed free for extra de-icing material or equipment.



### MOUNTING CHOICES

A variety of mounting options allow you to select the model that best fits your vehicle and usage.



### POLYETHYLENE CONSTRUCTION

High-quality polyethylene construction withstands the cold and corrosive conditions of icy operations—especially in wet and coastal conditions.



### WIDESPREAD PERFORMANCE

Spread widths from 20' to 40' allow each pass to handle a wide area for maximum de-icing performance.





# QUICK-CASTER™ 300

## TAILGATE BROADCAST SPREADER

With 3.0 cu ft of capacity, the QUICK-CASTER 300 tailgate spreader is a perfect choice for treating high traffic areas within a property or completing touch-up work. Optimized to work with bagged rock salt, the 300G works with a wide range of vehicles.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	25' (7.6 m)



# QUICK-CASTER™ 300G

## TAILGATE BROADCAST SPREADER WITH ELECTRIC FEEDGATE

The QUICK-CASTER 300G features an electric feedgate for the precise spreading of fine de-icing materials for high traffic areas and touch up work.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	20' (6.1 m)



# QUICK-CASTER 300W

## WIRELESS ELECTRIC TAILGATE SPREADER

This 3.0 cu ft tailgate spreader communicates wirelessly with the in-cab control for easy installation with no wires or harnesses. Simply mount to the vehicle's tailgate, pair to the control, and head off to spread material.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	25' (7.6 m)





# LOW PROFILE 500

## TAILGATE BROADCAST SPREADER

A compact, low-profile spreader designed for light-duty use, providing efficient salt and sand distribution for smaller truck setups and residential areas.

CAPACITY:	5.0 cu ft (0.14 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	30' (9.14 m)



# LOW PROFILE 1000

## TAILGATE BROADCAST SPREADER

Get mid-range capacity for a tailgate spreader with a low-profile design for clear visibility to the rear of the vehicle.

CAPACITY:	8.0 cu ft (0.23 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	30' (9.14 m)



# LOW PROFILE 2500

## TAILGATE BROADCAST SPREADER

A low-profile design and the highest capacity in the range make the LOW PROFILE 2500 tailgate spreader the choice for those servicing high traffic areas for mid- to large sized properties.

CAPACITY:	8.5 cu ft (0.24 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger
SPREAD WIDTH:	30' (9.14 m)





# SPEED-CASTER™ 525

## POLY TAILGATE HOPPER

A high-performance spreader designed for light to medium-duty use, delivering precise material distribution with a compact design for efficient snow and ice control.

CAPACITY:	5.25 cu ft (0.15 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Dual-Stage, 3" x 14" (762 × 35.56) steel vertical auger
SPREAD WIDTH:	30' (9.14 m)



# SPEED-CASTER™ 900

## POLY TAILGATE HOPPER

All of the performance and efficiency of the Speed-Caster 525, with over 40% more capacity. Ideal for those who prefer a tailgate spreader but have plenty of work to do.

CAPACITY:	9.00 cu ft (0.25 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Dual-Stage, 3" x 14" (762 × 35.56) steel vertical auger
SPREAD WIDTH:	40' (12.19 m)





# MOUNTING & MATERIAL GUIDE

## MOUNTS GUIDE (TAILGATES ONLY)

QUICK-CASTER™	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
RECEIVER HITCH MOUNT:	STD	STD	STD
FIXED MOUNT:			
DUAL-SWING MOUNT:			
UTILITY MOUNT:	■	■	■
DROP UTILITY MOUNT:	■	■	■
3-POINT MOUNT:	■	■	■
PIVOT MOUNT:			

LOW PROFILE	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500
RECEIVER HITCH MOUNT:	STD	■	STD
FIXED MOUNT:		■	
DUAL-SWING MOUNT:		■	
UTILITY MOUNT:			
DROP UTILITY MOUNT:			
3-POINT MOUNT:			
PIVOT MOUNT:			

SPEED-CASTER™	SPEED-CASTER 525	SPEED-CASTER 900
RECEIVER HITCH MOUNT:	STD	■ *
FIXED MOUNT:		
DUAL-SWING MOUNT:		
UTILITY MOUNT:		
DROP UTILITY MOUNT:		
3-POINT MOUNT:	STD	■
PIVOT MOUNT:		■

## TAILGATE SPREADER ACCESSORIES

SAFETY ACCESSORIES	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
WORK LIGHT KIT (SINGLE) FLEET FLEX			
SECONDARY WORK LIGHT KIT (SINGLE) FLEET FLEX			
MATERIAL FLOW & PERFORMANCE	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TOP SCREEN BAG SPLITTER KIT			
ADJUSTABLE DEFLECTOR KIT			
SCREEN KIT			
MATERIAL CONTROL TUBE			
WEATHER COVER	STD	STD	STD
5-FLIGHT AUGER			

OPERATOR CUSTOMIZATION	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TRUCK PROTECTOR FLAP			
7-PIN WIRELESS VEHICLE HARNESS			■
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT			

(Assumes dry, free-flowing materials)

\* May require use of auger tube restriction kit accessory.

↑ May require 5-flight auger accessory.

⇐Receiver mount & adapter required. Sold separately.

## MATERIALS GUIDE - GRANULAR (ALL PRODUCTS)

ALL PRODUCTS	TEMPEST™ POLY	TEMPEST STAINLESS	QUICK-CASTER™ 300G	QUICK-CASTER 300 & 300W	LOW PROFILE 500
BAGGED ICE MELTERS:					■
BAGGED ROCK SALT:			■	■	■
BULK SALT:	■	■	■		
CALCIUM FLAKES:			■		■ ↑
CALCIUM CHLORIDE PELLETS:			■		■ ↑
SALT/SAND MIX:	■	■			
SAND:	■	■			

	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER™ 525	SPEED-CASTER 900	WALK-BEHIND WB-100B & WB-160D
BAGGED ICE MELTERS:	■	■	■ *	■ *	■
BAGGED ROCK SALT:	■	■	■	■	■
BULK SALT:			■	■	■
CALCIUM FLAKES:	■ ↑	■ ↑	■ *	■ *	■
CALCIUM CHLORIDE PELLETS:	■ ↑	■ ↑	■ *	■ *	■
SALT/SAND MIX:					
SAND:					

## MATERIALS GUIDE - LIQUID (ALL PRODUCTS)

ALL PRODUCTS	WALK-BEHIND SS-120 Sprayer	PRE-WET SYSTEMS Trilogy Defense
BRINE	■	■
CALCIUM CHLORIDE SOLUTION	■	■
PREMIUM SOLUTIONS	■	■

LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
■	■	■	■	■
■	■	■		
LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
■		■		
■	■			
	■			
			■	■
■	■	■		

LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
	■			
			■	■





TARGET YOUR TAILGATE

THREE LINES. THREE PURPOSES. ENDLESS ABILITIES.

41

## QUICK-CASTER™

Single-stage delivery, compact and lightweight, designed for easy mounting on smaller vehicles, ideal for residential properties or light commercial use.

## LOW PROFILE

Single-stage delivery, low profile design for better visibility and stability, perfect for mid-sized trucks and commercial applications.

## SPEED-CASTER™

Dual-stage delivery, robust performance with dual motors for enhanced material flow control, suited for medium to heavy-duty commercial use.

40



COMPREHENSIVE - *IMPERIAL SYSTEM*

TAILGATE SPREADER TECHNICAL SPECS

QUICK-CASTER™ 300

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	68 lb
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 30"
MATERIAL COMPATIBILITY:	Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	3.0 cu ft	AUGER (DIAMETER X LENGTH):	3' Vertical High-Flow Auger
SPREAD WIDTH:	Up to 25'	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2" Light-Duty Hitch Mount (std)

QUICK-CASTER 300G

POLY TAILGATE SPREADER WITH ELECTRIC FEEDGATE

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	75 lb
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 30"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Clacium Flakes, Calcium Chloride Pellets, Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
		AUGER (DIAMETER X LENGTH):	-
CAPACITY (VOLUME):	3.0 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 20'	AVAILABLE MOUNTS:	2" Light-Duty Hitch Mount (std)

QUICK-CASTER 300W

POLY TAILGATE SPREADER WITH WIRELESS CONTROL

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 32"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt	AUGER (DIAMETER X LENGTH):	2.5" x 5.75" Vertical High-Flow Auger
CAPACITY (VOLUME):	3.0 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 25'	AVAILABLE MOUNTS:	2" Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	68 lb	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

LOW PROFILE 500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	75 lb with mount
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch	OVERALL DIMENSIONS (LxWxH):	21" x 39" x 34"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	2.63" x 6"
CAPACITY (VOLUME):	5.00 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 30'	AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

LOW PROFILE 1000

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	105 lb without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	19.5" x 50.5" x 35"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	2.63" x 6"
CAPACITY (VOLUME):	8.00 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 30'	OPTIONAL MOUNTS:	Fixed Mount, Class IV Hitch Mount, Dual-Swing

LOW PROFILE 2500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	131 lb without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	25" x 50" x 42"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	2.63" x 9"
CAPACITY (VOLUME):	8.50 cu ft	SPINNER SIZE:	15" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 30'	OPTIONAL MOUNTS:	Class IV Receiver Hitch Mount (std)

SPEED-CASTER™ 525

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	20.5" x 38" x 34"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	3" x 14" Heavy-Duty Solid Steel
CAPACITY (VOLUME):	5.25 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 30'	AVAILABLE MOUNTS:	2" Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	160 lb	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

SPEED-CASTER 900

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	24" x 52" x 36"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	3" x 20" Heavy-Duty Solid Steel
CAPACITY (VOLUME):	9.00 cu ft	SPINNER SIZE:	12" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 40'	OPTIONAL MOUNTS:	Pivot Mount, 2" Receiver Hitch
APPROXIMATE WEIGHT (EMPTY):	180 lb		(Requires Adapter Mount), 3-Point Hitch Mount



QUICK-CASTER™ 300		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	30.8 kg
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 76.2 cm
MATERIAL COMPATIBILITY:	Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	0.09 cu m	AUGER (DIAMETER X LENGTH):	6.35 cm x 14.61 cm Vertical High-Flow Auger
SPREAD WIDTH:	7.6 m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2.54 cm Light-Duty Hitch Mount (std)

QUICK-CASTER 300G		POLY TAILGATE SPREADER WITH ELECTRIC FEEDGATE	
HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	34.0 kg
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 76.2 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Clacium Flakes, Calcium Chloride Pellets, Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
		AUGER (DIAMETER X LENGTH):	-
CAPACITY (VOLUME):	0.09 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	6.1 m	AVAILABLE MOUNTS:	2.54 cm Light-Duty Hitch Mount (std)

QUICK-CASTER 300W		POLY TAILGATE SPREADER WITH WIRELESS CONTROL	
HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 81.3 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt	AUGER (DIAMETER X LENGTH):	6.35 cm x 14.61 cm Vertical High-Flow Auger
CAPACITY (VOLUME):	0.09 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 7.6 m	AVAILABLE MOUNTS:	2.54 cm Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	30.8 kg	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

LOW PROFILE 500		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	34.0 kg with mount
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch	OVERALL DIMENSIONS (LxWxH):	53.3 cm x 99.1 cm x 86.4 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	6.68 cm x 15.24 cm
CAPACITY (VOLUME):	0.14 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 9.14 m	AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

LOW PROFILE 1000		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	47 kg without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	49.5 cm x 128.3 cm x 88.9 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	6.68 cm x 15.24 cm
CAPACITY (VOLUME):	0.23 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 9.14 m	OPTIONAL MOUNTS:	Fixed Mount, Class IV Hitch Mount, Dual-Swing

LOW PROFILE 2500		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	59.4 kg without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	63.5 cm x 127 cm x 106.7 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
		AUGER (DIAMETER X LENGTH):	6.68 cm x 22.86 cm
CAPACITY (VOLUME):	0.24 cu m	SPINNER SIZE:	38.1 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	9.14 m	OPTIONAL MOUNTS:	Class IV Receiver Hitch Mount (std)

SPEED-CASTER™ 525		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	52.1 cm x 96.5 cm x 86.4 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	7.62 cm x 35.56 cm Heavy-Duty Solid Steel
CAPACITY (VOLUME):	0.15 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	9.14 m	AVAILABLE MOUNTS:	2.54 cm Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	72.6 kg	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

SPEED-CASTER 900		POLY TAILGATE SPREADER	
HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	61.0 cm x 132.1 cm x 91.4 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	7.62 cm x 50.8 cm Heavy-Duty Solid Steel
CAPACITY (VOLUME):	0.25 cu m	SPINNER SIZE:	30.5 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	12.2 m	OPTIONAL MOUNTS:	Pivot Mount, 2.54 cm Receiver Hitch
APPROXIMATE WEIGHT (EMPTY):	81.7 kg		(Requires Adapter Mount), 3-Point Hitch Mount





# SIDEWALK SPREADERS



# SIDEWALK + STORAGE PRODUCTS

Fisher Engineering's sidewalk and storage products facilitate effective snow and ice management in urban settings. This collection includes drop and broadcast spreaders and a liquid sprayer for sidewalk treatment.



## WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is built for treating wider pedestrian areas such as driveways, courtyards, and wide walkways.

CAPACITY:	0.5 cu ft (0.04 cu m)   100 lb (45.36 kg)
SPREAD WIDTH:	Up to 20' (6.0 m)
MATERIAL TYPES:	Bagged Ice Melters, Bagged Rock Salt Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



## WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is made for treating walkways and keeping material out of adjoining landscape features.

CAPACITY:	1.5 cu ft (0.04 cu m)   160 lb (75.57 kg)
SPREAD WIDTH:	36' (11.0 m)
MATERIAL TYPES:	Bagged Ice Melters, Bagged Rock Salt Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



## SS-120 SIDEWALK SPRAYER

The SS-120 walk-behind sprayer gives you battery-powered convenience and a heavy-duty spray wand for stairs and other places where granular deicers are ineffective, such as curbs and steps. Pretreating with liquid brine allows you to use less salt, save time, and deliver exceptional results.

CAPACITY:	12 gallons (45.4 L)
SPRAY WIDTH:	Up to 48" (122 cm)
MATERIAL TYPES:	Brine, Calcium Chloride Solution, Premium Solutions

## ALL-WEATHER STORAGE CONTAINERS

Streamline your operations by storing salt, tools, PPE, and supplies where you need them with FISHER storage containers. These weatherproof polyethylene units are available in four sizes—3, 6, 12, and 18 cubic feet—to suit any storage requirement.







# BORN IN THE USA.

SNOW + ICE IN OUR DNA

In 1948, a man named Dean Fisher started a snowplow company. The name was simple: His. And the destination was busy: Boston. So after a trip to see the in-laws in Maine, the plan changed.

Fisher chose a small coastal town called Rockland. In his words: “What better place to build snowplows than in snow country?” He began in a small garage by the water, and designed over 50 snowplows that first winter. Parts were chained to the pier—testing corrosion in the cold, salty ocean. That set the relentless bar for every winter to come. Over 75 years later, snowplows from Fisher Engineering are

frozen into culture as the leader of snow and ice removal. Our success grew us out of the garage, but we’ve always kept that day-one spirit. Still building, testing, and proving right here in Rockland.



**“THE BEST PRODUCT WE KNOW HOW TO MAKE. THE BEST SERVICE WE KNOW HOW TO GIVE.”**

-Dean Fisher



FISHER STORIES:

# INSIDE THIS 7TH GENERATION MAINER'S LIFE, LOSS, & LEGACY.

Dave Wiley is the Technical Service Manager at Fisher Engineering and has been with the brand since 2009. But his roots in Maine go far deeper. He's the 7th generation to live on his family's property in Warren, and holds a special perspective on life, loss, and what it means to build a legacy. In this debut episode of FISHER Stories, we join Dave and his restored 1953 Jeep Willy to uncover the person behind the plow.

Scan to watch





**FISHER ENGINEERING | 50 Gordon Drive | Rockland, Maine 04841**

Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 7,347,390; 7,540,436; 9,033,265; 9,296,571; 9,757,744; 11,680,379; and other patents pending. Fisher Engineering offers a limited warranty for all spreaders. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: FISHER®, HELIXX™, QUICK-CASTER™, SPEED-CASTER™, TEMPEST™



**FISHERPLOW.COM**

© 2025 Douglas Dynamics, LLC  
All rights reserved.



SEE YOU IN THE STORM