



| AIRFOIL DIAMETER      | 5ft (1.5m)                             | 6ft (1.8m) | 7ft (2.1m) | 8ft (2.4m) |
|-----------------------|----------------------------------------|------------|------------|------------|
| Airfoil Material      | 6061-T6 Aircraft Grade Aluminum        |            |            |            |
| Number of Airfoils    | 4                                      |            |            |            |
| Airfoil Finish Colors | Matte Black, Fresh White, Matte Silver |            |            |            |

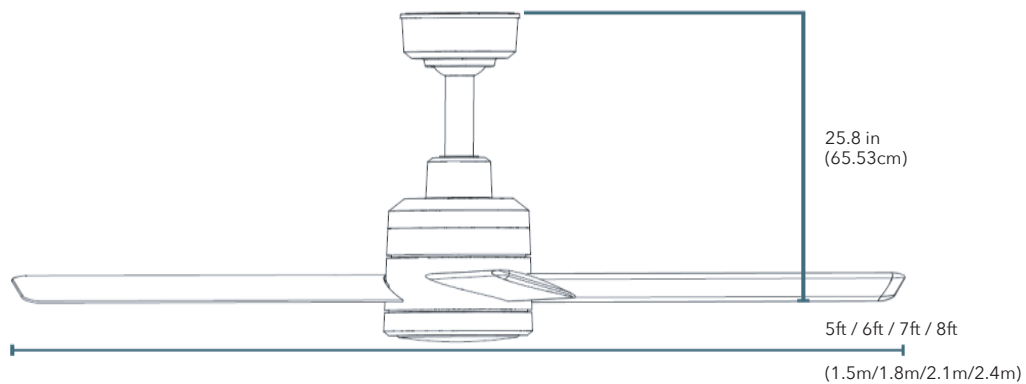

| PERFORMANCE           | 5ft (1.5m)                                | 6ft (1.8m)                               | 7ft (2.1m)                               | 8ft (2.4m)                                |
|-----------------------|-------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| Max Speed (RPM)       | 194                                       | 161                                      | 143                                      | 143                                       |
| Recommended Spacing   | 20ft (6.10m)                              | 24ft (7.32m)                             | 28ft (8.53m)                             | 30ft (9.14m)                              |
| Max Affected Area     | 400ft <sup>2</sup> (37.16m <sup>2</sup> ) | 576ft <sup>2</sup> (53.5m <sup>2</sup> ) | 784ft <sup>2</sup> (72.8m <sup>2</sup> ) | 1024ft <sup>2</sup> (95.1m <sup>2</sup> ) |
| Max Sound Level (dBA) | 51                                        | 47                                       | 54                                       | 54                                        |
| Air Volume            | 11,437 CFM<br>(5.398CMS)                  | 16,540 CFM<br>(7.806 CMS)                | 18,391 CFM<br>(8.680 CMS)                | 24,466 CFM<br>(11.547 CMS)                |

| HANGING REQUIREMENTS | 5ft (1.5m)     | 6ft (1.8m)       | 7ft (2.1m)     | 8ft (2.4m)       |
|----------------------|----------------|------------------|----------------|------------------|
| Hanging Weight       | 48lbs (21.8kg) | 48.5lbs (22.0kg) | 49lbs (22.2kg) | 49.5lbs (22.5kg) |

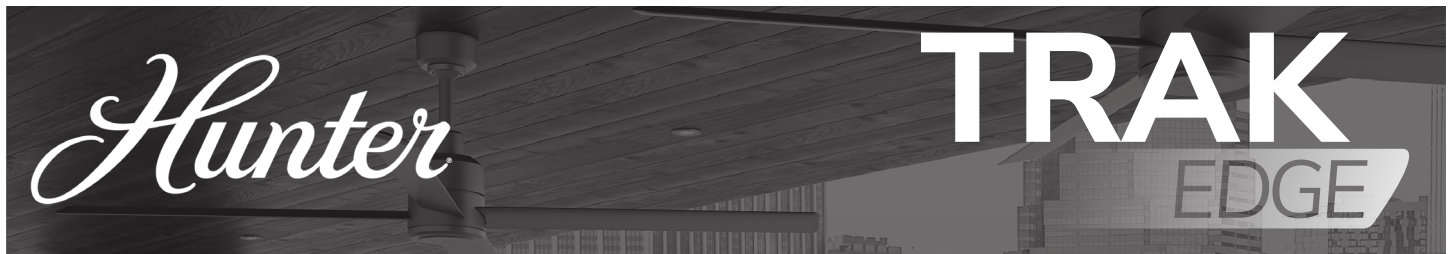

| MOTOR         | 5ft (1.5m)                   | 6ft (1.8m) | 7ft (2.1m) | 8ft (2.4m) |
|---------------|------------------------------|------------|------------|------------|
| Motor Type    | Reversible, 8-Speed DC Motor |            |            |            |
| Max Power (W) | 68                           | 73         | 74         | 102        |

| MAX AMP DRAW          | 5ft (1.5m) | 6ft (1.8m) | 7ft (2.1m) | 8ft (2.4m) |
|-----------------------|------------|------------|------------|------------|
| 120V Single Phase (A) | 0.57       | 0.61       | 0.62       | 0.85       |
| 240V Single Phase (A) | 0.31       | 0.33       | 0.34       | 0.46       |

POWER AND CONTROLS

|                                |                                                                                                                        |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Power Source                   | AC 1PH 100-120V 50-60HZ, AC 1PH 200-240V 50-60HZ                                                                       |
| Wall Control Options           | RF Remote Control, Basic Wall Control, 3in. (7.6cm) Touchscreen Wall Control, or 4in.(10.2cm) Touchscreen Wall Control |
| Building Management Compatible | BACNet Gateway                                                                                                         |

INSTALLATION

|                  |                                                                                                                                 |
|------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Mounting Options | Standard/Angled                                                                                                                 |
| Downrod Length   | 11in. (27.94cm) Standard Downrod<br>Optional downrod sizes: 24in. (60.96cm), 36in. (91.44cm), 48in. (121.92cm), 60in. (152.4cm) |
| Motor Wiring     | Pre-wired motor cables, pre-assembled downrod                                                                                   |

LED Light Kit

|                                |                                                                |
|--------------------------------|----------------------------------------------------------------|
| Color Temperature (K)          | 3,000                                                          |
| Flux (Lm)                      | 2,600                                                          |
| Min Luminous Efficiency (Lm/W) | 80                                                             |
| Max Input Power (W)            | 30                                                             |
| Max Input Current              | 120V Single Phase (A) = 0.25      240V Single Phase (A) = 0.13 |

RATING AND COMPLIANCE

|                 |                                                                              |
|-----------------|------------------------------------------------------------------------------|
| ---             | UL 507 Wet Rated                                                             |
| Certifications  | ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America |
| Safety Features | International Low Voltage Directive: 2014/35/EU. IEC / EMC / CE              |
| Warranty        | 5-Year Warranty (All Components)                                             |

REV122325SR