


DS-KD-KK
KD8 Series Pro Modular Door Station

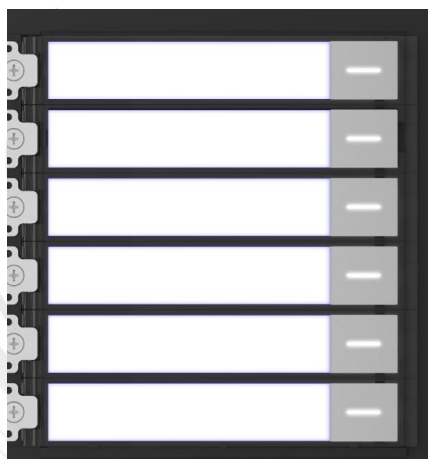

- Nametag module of modular door station
- Six nametag buttons calling Design For easier calls
- IP65 protection level
- Backlight compensation behind the nametag buttons
- Easy to use and extend

Alarm output	/
Lock control	/
Door contact input	/
General	
Button	6
Power consumption	≤ 2 W
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Net weight: 190 g Gross weight: 438 g
Protective level	IP65
Working temperature	-40 °C to 55 °C (-40 °F to 131 °F)
Working humidity	10% to 95%
Dimension (W × H × D)	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Battery	/
Installation	Flush mounting, surface mounting




▪ Available Model

DS-KD-KK

DS-KD-KK/美国子公司/USA

DS-KD-KK/HIKVISION EU

▪ Dimension



Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KD-ACW2 2nd Video Intercom Brackets	DS-KD-ACW3 2nd Video Intercom Brackets	DS-KD-ACF2 2nd Video Intercom Brackets	DS-KD-ACF3 2nd Video Intercom Brackets	DS-KA01-ZX-10 Demo Kit with 2nd video intercom
				
DS-KABD8003-RS2 Rain Shield of Module Door Station	DS-KABD8003-RS3 Rain Shield of Module Door Station	DS-KD-ACF3/Plastic 2nd Video Intercom Brackets	DS-KD-ACF2/S 2nd Video Intercom Brackets	DS-KD-ACF3/S 2nd Video Intercom Brackets
				
DS-KD-ACW2/S 2nd Video Intercom Brackets	DS-KD-ACW3/S 2nd Video Intercom Brackets	DS-KD8003-IME1(B) KD8 Series Modular Door Station	DS-KD8003-IME1(B) / Flush KD8 Series Pro Modular Door Station	DS-KD8003-IME1(B) / Surface KD8 Series Pro Modular Door Station
				
DS-KD8003Y-IME2 Two wire main unit	DS-KD-PMR Induction Loop Module	DS-KD7003EY-IME2 2-wire HD Door Station	DS-KDE-ACR3 Video Intercom Brackets	DS-KD-ACF2#EU 2nd Video Intercom Brackets