

## DS-K1T343MFX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/fingerprint authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- Max.1500 faces capacity, Max.3000 fingerprints capacity, and Max.3000 cards
- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens,Built-in M1 card reading module
- Two-way audio with client software, indoor station, and main station; Supports TCP/IP
- Supports ISAPI, ISUP5.0
- Configuration via the web client
- Face recognition. Distance: 0.3 m to 1.5 m
- Duration < 0.2 s/User
- Accuracy rate ≥ 99%


## ▪ Specification

<b>Display</b>	
Screen size	4.3 inch
Operation method	Capacitive touch screen
Type	LCD
<b>Video</b>	
Lens	2
Resolution	2 MP
<b>Audio</b>	
Audio quality	Noise suppression and echo cancellation
<b>Network</b>	
Wired network	Support
<b>Interface</b>	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand(Hik 26bit,Hik 34bit)
USB	1
<b>Authentication</b>	
Card type	M1 card
Card reading frequency	13.56 MHz
<b>General</b>	
Power supply	12 VDC, 1 A (power adapter included)
Working temperature	-10 °C to 40 °C (14 °F to 104 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	118.4 mm × 118.4 mm × 21.8 mm (4.66" × 4.66" × 0.86")
Installation	Wall mounting, base mounting
Application environment	
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean; Japanese
Platform	Hik-ProConnect and HikCentral Professional
<b>Function</b>	
Face anti-spoofing	Support
Audio prompt	
Time synchronization	

## ▪ Available Model

DS-K1T343MFX

▪ **Dimension**

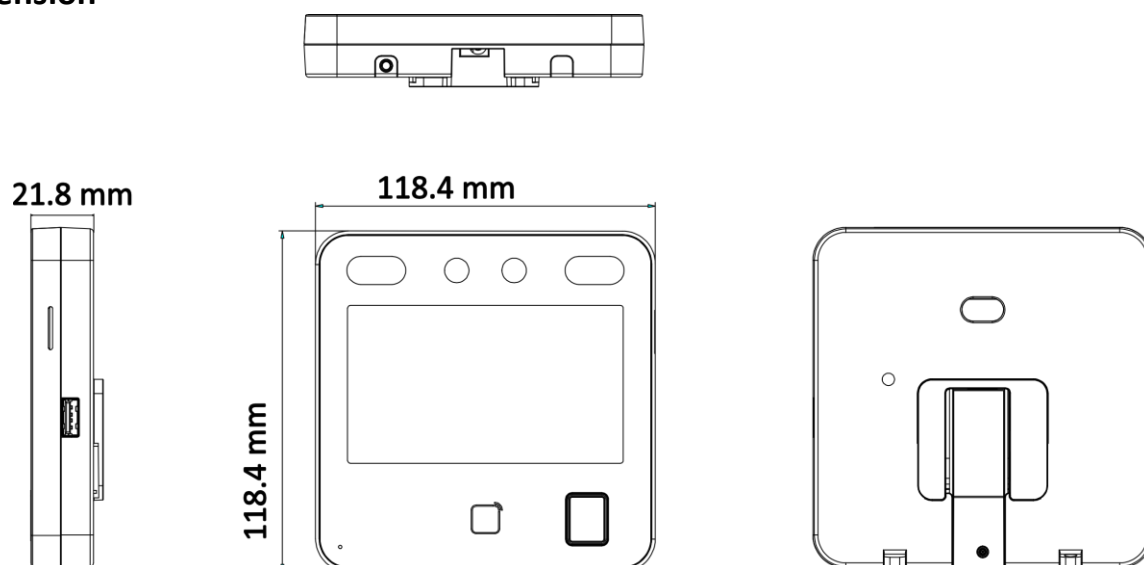

▪ **Accessory**

▪ **Optional**

**DS-KAB6-W1  
Bracket**

