


/ Highlight Features


RG-EST350v2

5GHz Dual-stream 802.11ac Next-generation Wireless Bridge

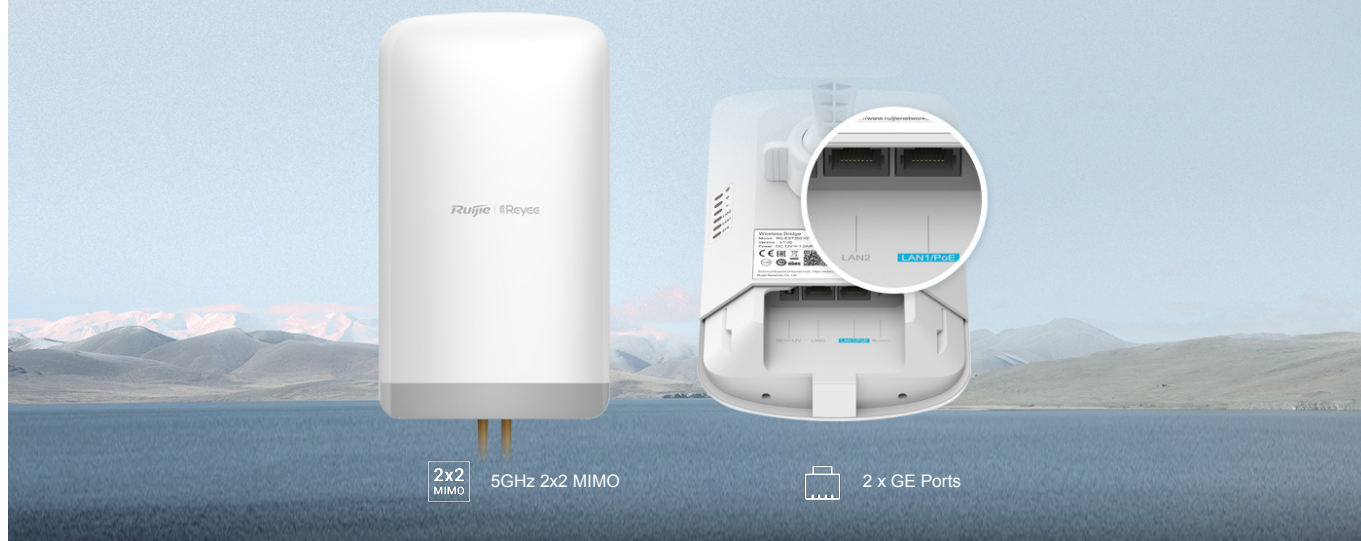

Long Range


High-speed wireless data transmission at 5KM range

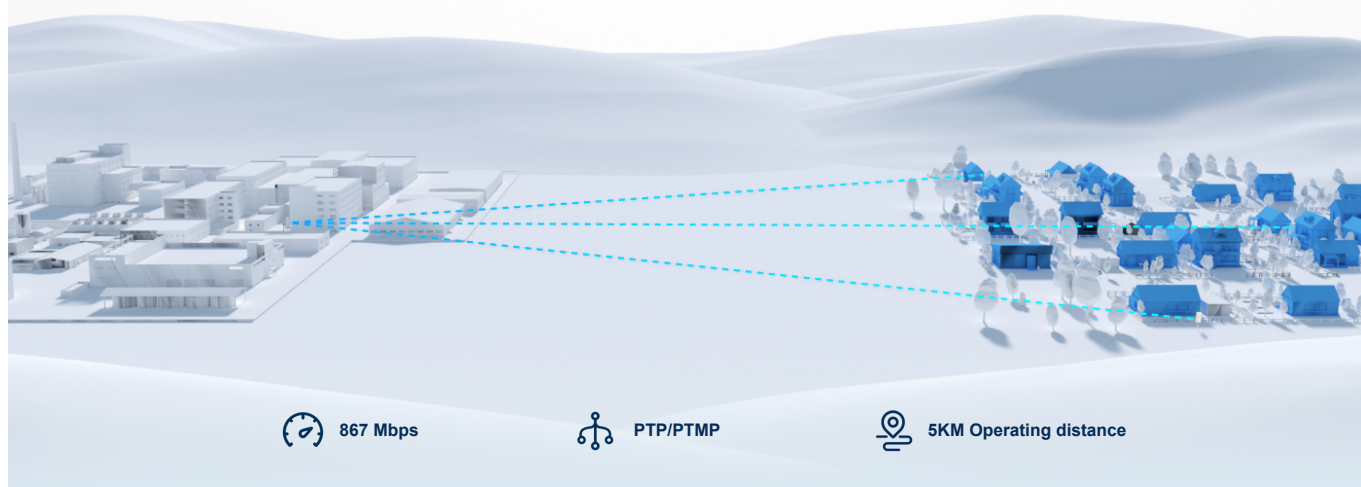

Highlight Features

Convenient


Zero configuration automatic pairing
Plug and Play

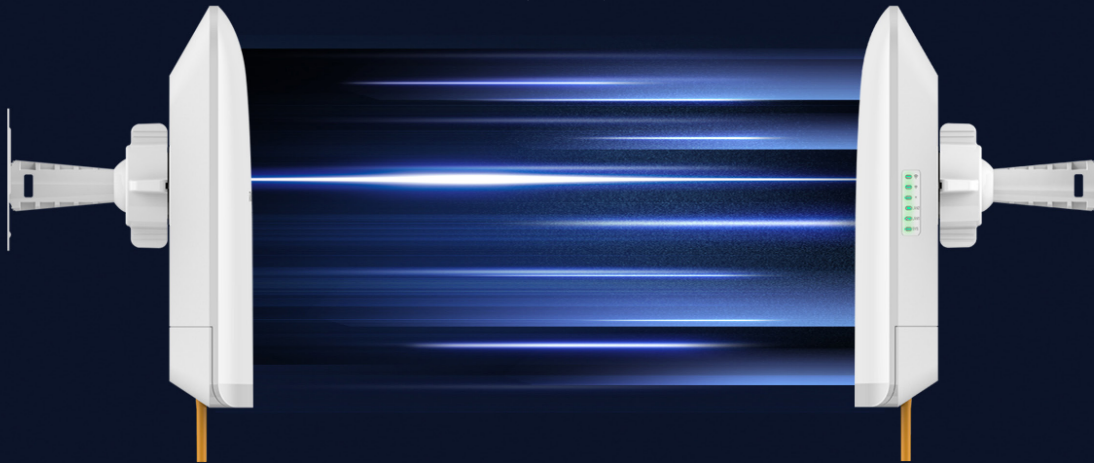

Easy to Install



Cloud, Make Your Business Easy

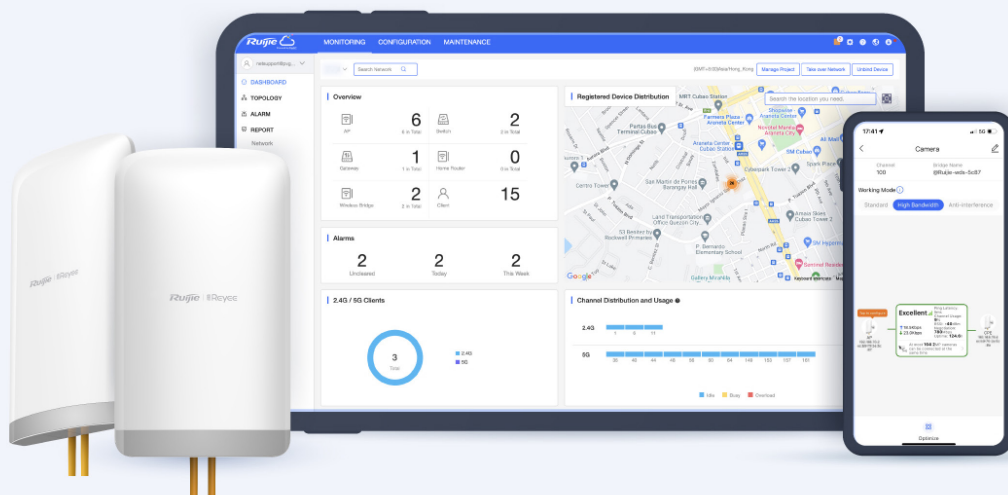

Specifications

Basic

Radio Design	5 GHz Single-Band Dual-Stream
Operating Band	802.11a/n/ac: 5.150~5.350GHz, 5.470~5.725GHz , 5.725~5.850GHz (country specific)
Antenna	Directional antennas, 15 dBi
Polarization	Horizontal: 31°, Vertical: 14°
Bridging Distance	5 KM (recommended)
Spatial Streams	2x2, MU-MIMO
Memory/Flash	128 MB/8 MB
Maximum Throughput	Up to 867 Mbps at 5 GHz
Ports	2 10/100/1000Base-T Ethernet ports, port 1 with Passive PoE
Max. Transmit Power	≤400 mW(26 dBm) (adjustable)
IP Rating	IP54
Lightning Protection	4 KV
Installation	Wall-mounted/ Pole-mounted
Weight	0.5 kg
Dimensions (D x W x H)	230 mm × 132 mm × 48 mm

Software Features

IPv4	
802.1Q VLAN	✓
Multi-VLAN Transparent Transmission	✓
ARP	256
Max. Concurrent Connections	8000
Ping	✓
Traceroute	✓

Specifications

Software Features

IPv4

Unicast traffic



DHCP Client



DNS Client



Static IP address



IP Collision Avoidance



Management IP

192.168.120.1

Routing

Default Route



Wireless

SSID/SSID Hiding



Password

Open / WPA-PSK / WPA2-PSK / WPA/WPA2-PSK

RSSI

-58 dBm@1KM
-66 dBm@3KM
-70 dBm@5KM

Performance

230 Mbps@1KM(HT40)
200 Mbps@3KM(HT40)
150 Mbps@5KM(HT40)

One-Click Optimization



DFS



Local Forwarding



WLAN QoS

WMM

Management

Zero Provisioning on Cloud

QR-Code / Serial Number

CWMP(TR069) Support



Point-to-Point

