



## 2MP Fixed-focal Wi-Fi Turret Network Camera

# DH-T2A-PV



### Series Overview

The Turret Series, which is under the Dahua Wireless series, are cameras that are not only easy to install and operate, but also perform outstandingly and are cost-effective. They capture sharp, detailed images of scenes in high definition and offer powerful functions, such as AI human detection, to accurately trigger alarms. Information is also synchronously sent to your phone to keep you up-to-date. With its IP67 rating, these cameras are able to withstand harsh environments, making them highly suitable for use in small and medium-sized settings such as small-sized retail stores.



#### 2MP

Clear images with sharp details



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### Smart Dual Light

Captures color details for post-event review



#### Sound and Light Alarm

Provides instant alarms to deter intruders



#### Two-way Talk

Communication anytime, anywhere



#### IP67 Protection

Withstands harsh environments



#### H.265

Advanced H.265 compression technology




#### DMSS App

Easy to use



#### Micro SD Card

Low-cost storage

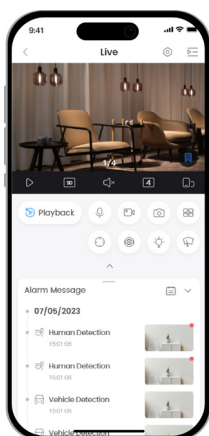

## Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.





## Specifications

### Camera

|                            |   |
|----------------------------|---|
| Image Sensor               | 1/3" CMOS   |
| Max. Resolution            | 1920 (H) × 1080 (V)   |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s                                     |
| Illumination Distance      | Up to 30 m (98.53 ft)   |
| Illuminator On/Off Control | Auto  |
| Illuminator Number         | 1 (IR LED); 1 (Warm light)  |
| Max. Aperture              | F1.6  |
| Field of View              | 2.8 mm: H: 98°; V: 55°; D: 115°<br>3.6 mm: H: 78°; V: 41°; D: 94° |

### Intelligence

|                 |  |
|-----------------|--|
| Human Detection | Support the classification and accurate detection of human |
|-----------------|--|

### Video & Audio

|                    |  |
|--------------------|--|
| Video Compression  | H.264B; H.264; H.264H; H.265   |
| Video Frame Rate   | Main stream: 1920 × 1080@ (1–25/30 fps)<br>Sub stream: 640 × 480@ (1–25/30 fps)<br>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |
| Resolution         | 1080p (1920 × 1080); 1280 × 960 (1280 × 960); 1280 × 720 (1280 × 720)  |
| Video Bit Rate     | H.264: 32kbps ~ 4096kbps<br>H.265: 12kbps ~ 4096kbps   |
| Day/Night          | Auto(ICR)/Color/B/W  |
| Motion Detection   | OFF/ON   |
| Smart Illumination | Yes  |

|                   |                             |
|-------------------|-----------------------------|
| Image Rotation    | 0°/180°                     |
| Built-in MIC      | Yes, built-in Mic           |
| Built-in Speaker  | Yes, built-in speaker       |
| Audio Compression | G.711a; G.711Mu; PCM; G.726 |

### Network

|                     |                                       |
|---------------------|---------------------------------------|
| Network Port        | RJ-45 (10/100 Base-T)                 |
| Wi-Fi               | IEEE802.11b/g/n 2.4–2.4835 GHz; 2.4 G |
| Storage             | Micro SD card (support max. 256 GB)   |
| Management Software | Smart PSS; DSS; DMSS                  |
| Mobile Client       | iOS; Android                          |

### General

|                       |   |
|-----------------------|---|
| Certifications        | CE-LVD: EN62368-1;<br>CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU;<br>CE-RED: Radio Equipment Directive 2014/53/EU |
| Power Supply          | 12 VDC  |
| Power Consumption     | Basic: 2 W (12 VDC)<br>Max. (H.265+warm light intensity): 6.9 W (12 VDC)  |
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F)  |
| Operating Humidity    | ≤95%  |
| Protection            | IP67  |
| Casing Material       | Inner core: Metal + Plastic<br>Cover: Plastic   |
| Product Dimensions    | Φ109.9 mm × 102.2 mm (Φ4.33" × 4.02")   |
| Net Weight            | 353 g (0.78 lb)   |

## What's in the box



× 1

#### Tools:

Installation Position Map×1  
Mounting Plate×1  
Screw Package×1  
Waterproof Connector x 1

#### Documents:

QR Code×1  
Quick Start Guide×1  
Legal and Regulation Information×1

#### Power:

Power Adapter×1

