

# ARD912-W2(868)

Wireless Water Leak Detector



#### **System Overview**

Alarm Current

Wireless Water Leak Detector can be used to detect water leaks in indoor pipes, baths, sinks, washing machines, and dishwashers. It triggers alarms and sends timely notifications to keep you up to date on ongoing events. Hassle free, it is easy to install and does not require wiring. It also provides communication security, supporting the use of wireless communication with encryption technology.

## **Technical Specification Function** 1 for multiple statuses (pairing, power status, and Indicator Light alarm) Button Remote Update Cloud update **Low Battery Detection** Tamper Technical Water leak detector Sensor Sensitivity Adjustable **Operating Current** 28.5 uA

Wireless		
Carrier Frequency	868.0 MHz-868.6 MHz	
Communication Mechanism	Two-way	
Communication Distance	Up to 1,200 m (3937.01 ft) in an open space	
Encryption Mode	AES128	
Frequency Hopping	Yes	

5.8 mA


- · Frequency hopping and two-way communication technology ensure that communication is stable.
- · Supports jamming detection and communication encryption.
- · Supports cloud update and automatically restores when cloud update fails
- $\cdot$  Displays the temperature of the surrounding environment and supports the overheating alarm.
- · Sensitivity adjustment.

#### General


CR123A×1	
3 years when triggered once a day.	
Max 144 mW	
Indoor: –10 °C to +55 °C (+14 °F to +131 °F)	
10%-90% (RH)	
-10 °C to +55 °C (+14 °F to +131 °F)	
10%-90% (RH)	
84.7 mm × 84.7 mm × 32.5 mm (3.33" × 3.33" × 1.28")	
135.0 mm × 98.0 mm × 56.0 mm (5.32" × 3.86" × 2.20")	
0.1 kg (0.22 lb)	
0.2 kg (0.44 lb)	
Plane mount	
PC + ABS	
IPX5	
CE	

Ordering Information		
Туре	Part Number	Description
Wireless Water Leak Detector	DHI-ARD912-W2(868)	Wireless Water Leak Detector

### Installation



# **Application**

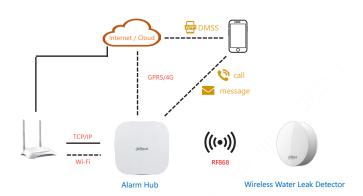

# Dimensions (mm[inch])

