



BSR2900-C Series

Multi-service Enterprise Gateway

Product Overview

BDCOM BSR2900-C Series is the next-generation multi-functional switching router developed by BDCOM. It adopts the 64-bit multi-core processor, high-speed switching engine. It is a well-adapted router.

BDCOM BSR2900-C Series has 2 models such as BSR2900-20C, BSR2900-40C. It supports the full switching function, USB2.0 expansion, service expansion and engineering maintenance.

BDCOM BSR2900-C Series is equipped with BDROS operating system, of which BDCOM has the independent intellectual property right. BDCOM BSR2900-C Series builds a real multiservice broadband platform by providing rich software functions such as routing, switching, safety, VPN and LTE. With its strong processing and expansion capability, rich software functions and hardware modules, BDCOM BSR Series meet requirements of the government, financial institutions, the defense system, operators and enterprises in network construction.

Diversified options

- Gigabit RJ45
- Gigabit SFP
- USB2.0
- Reset button

Multiservice platform

- RIP/OSPF/BGP
- PPTP/L2TP/GRE/IPSec
- GBSC flow-control
- VLAN
- ZTP

BDROS operating system

- IPv4/v6 dual-stack
- High performance
- energy efficiency design

Product Characteristics

High Performance

BDCOM BSR2900-C Series is driven by the 64-bit dual-core processor with specialized gigabit ASIC switching chip and .FPGA components, which enables the whole hardware platform to run on the high-speed Ethernet frame. The innovative design endows BSR2900 with asuper processing capability, providing a guarantee for upper-layer software functions.

Strong Expansibility

Because built on the basis of switching core, BSR2900-C Series can expand their external interfaces, slots and modules without any limitation from the total CPU resources. The switching chip guarantees that the whole BSR2900 router is provided with sufficient and broadband internal channels, making the expansibility of BSR2900 routers exceed that of traditional modularized routers.

Energy-Saving Advantage

BSR2900-C Series adopt the new-generation hardware chip in consideration of energy saving while guaranteeing its strong processing capacity. Compared with the mainstream devices in the industry, power consumption of the BSR router is reduced by 15% to 20%,which both reduces the device maintenance cost and accords with the low-carbon idea. BDCOM BSR2900 Series is also equipped with the environment friend lymaglev mute fan.

Varied Protocols

BSR2900-C Series supports Layer 2 link protocols including PPP and dot1q; static routing; policy routing; and dynamic routing such as RIP, OSPF and BGP. These routing protocols are well compatible with the devices manufactured by the mainstream vendors in the industry.

Besides, BSR2900-C Series supports integration of multiple services such as routing, switching, voice, safety and wireless, which meets the requirement of complicated network construction.

New Services

BSR2900-C Series supports the MPLS characteristics and the MPLS-based layer-2/layer-3 VPN technology, which realize the transparent Ethernet transmission service and the flexible enterprise interconnection.

BSR2800-08/10 Series supports IPv6 data forwarding, routing protocols and multicast routing protocols;

BSR2800-08/10 Series also supports the IPv4/IPv6 protocol stack and the interconnection technology, which makes the existing networks smoothly upgrade to IPv6.

Secure Service Access

BSR2900-C Series supports selective ACL firewall filtration technology, NAT, VPNs such as IPSec/L2TP/PPTP/GRE, and security technologies such as AAA, Radius, PAP/CHAP.

Traffic Management Policy

BSR2900-C Series supports varied queues including FIFO, PQ, CQ, CBWFQ, LLQ, WFQ, DSCP, IP Precedence, RTS and CAR.

BDCOM BSR2900-C Series supports its self-developed traffic control and service management policy (GBSC), which can better real-time arrange and monitor your data traffic.

Flexible Management and Maintenance

BSR2900-C Series is convenient in managing and monitoring the network by using the in-band and out-band management tools such as Console, Telnet, SSH and SNMP;

Model lists

BSR2900-20C




- 1-Port Console(RJ45)
- 1-Port USB2.0
- 2-Port Gigabit Rj45
- 2-Port Gigabit RJ45/SFP combo

BSR2900-40C



- 1-Port Console(RJ45)
- 1-Port USB2.0
- 4-Port Gigabit RJ45
- 4-Port Gigabit RJ45

Application Diagram

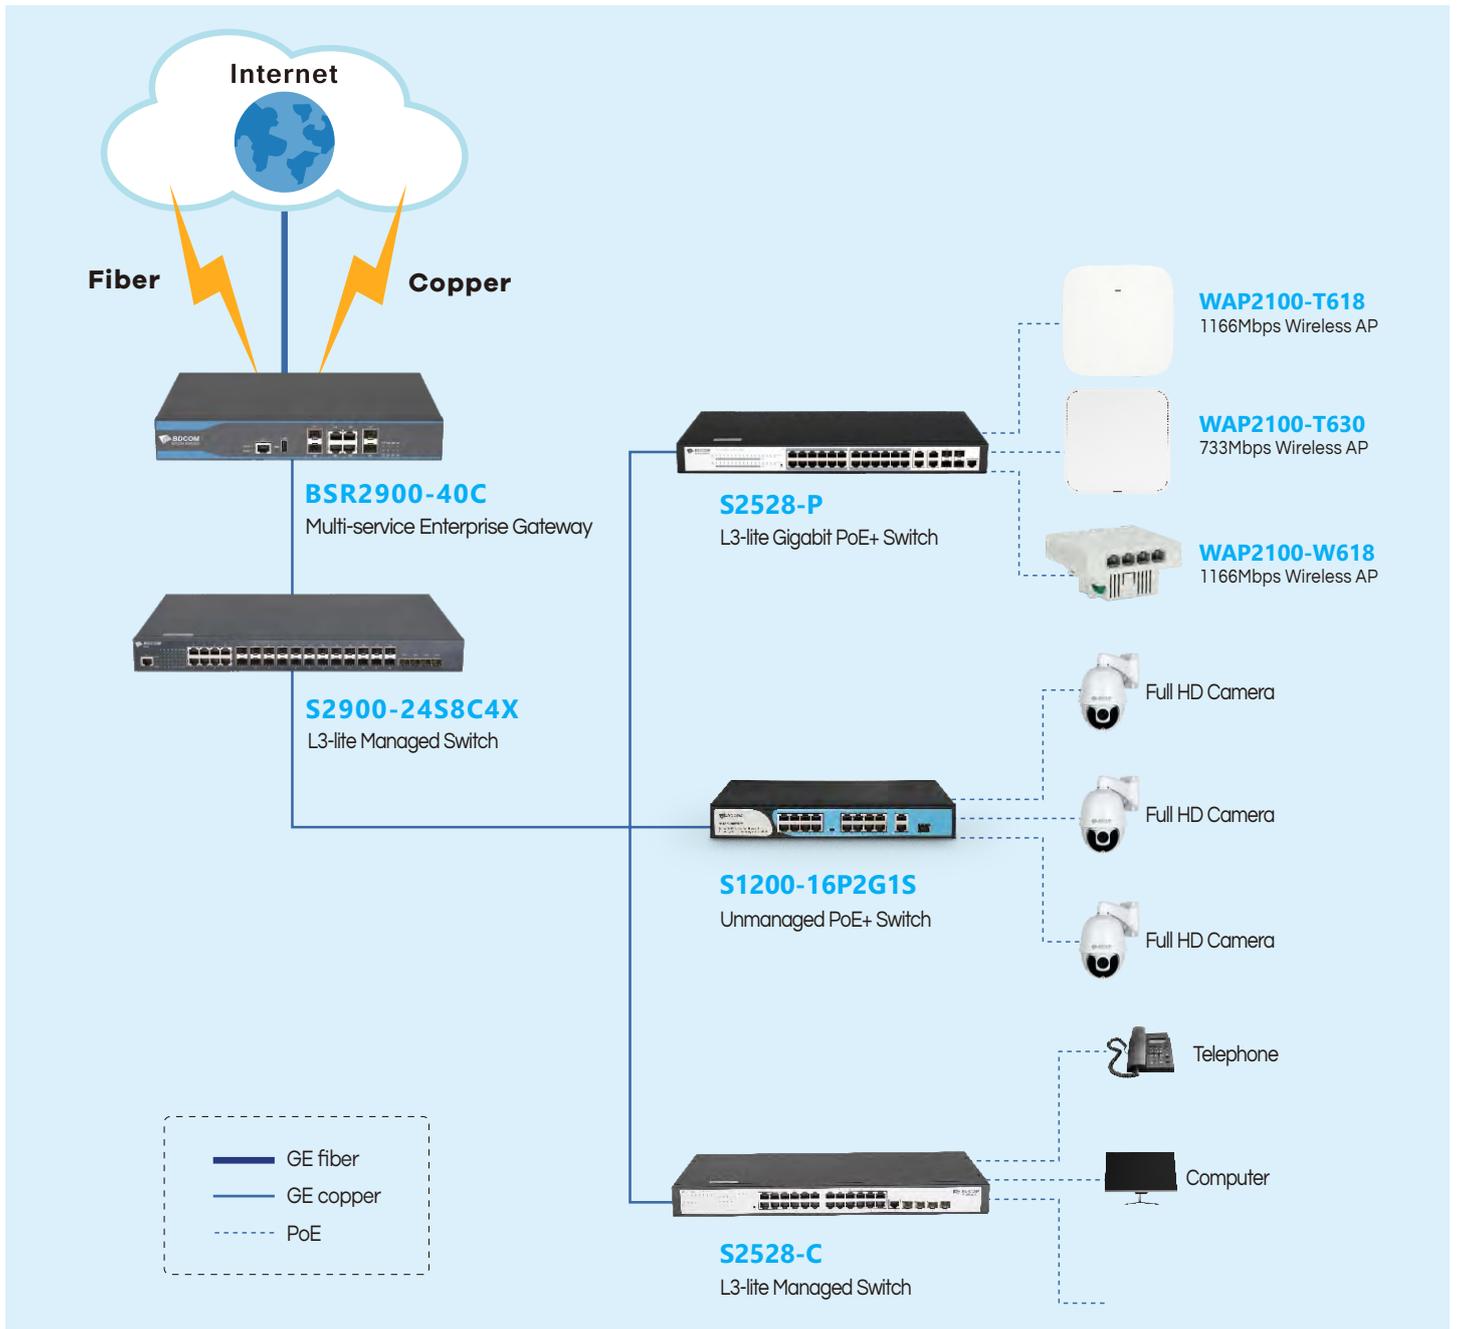

BDCOM BSR2900-C Series

Software Characteristics

Routing

LAN

- ARP, ARP proxy, Gratuitous ARP

WAN

- PPP, PPPoE (Client/Server)

Routing

- Static route, default route
- RIPv1/v2, OSPFv2, BGPv4
- Fast Switch, Load-Balance
- PBR

Multicast

- IGMP
- PIM-DM, PIM-SM

IPv6

- IPv6 ND, IPv6 PMTU, IPv6 FIB, IPv6 ACL, IPv6 (authenticate through IPv6 Phasell)
- IPv6 QoS
- IPv6 transition: NAT-PT, IPv6 tunnel, 4over6
- IPv6 tunnel: IPSec v6, GRE, 6to4, ISATAP
- IPv6 route: IPv6 static route, RIPng, OSPFv3, BGP4+

Switching

Switching

- 802.1p CoS, 802.1Q VLAN
- STP, RSTP
- Keep alive, port mirror, broadcast/multicast storm control

Network safety

AAA

- Authentication, Authorization, Accounting
- Enable, local, Radius, Tacacs+
- PAP, CHAP, MS-CHAP

MPLS

- VPLS, MP-BGP, VRF
- L2VPN, L3VPN

IP service

- ICMP, TCP, UDP, IP Option
- NAT, PAT, Port-MAP, Private-Service, ALG
- Ping, Trace Route, Nslookup
- IP ACL, IMP filter, Fast-Access
- DHCP Client/Serv/Relay
- DNS, DNS host, DNS Proxy, DDNS (Peanut Hull/DynDNS/CTC)
- Helper-Address, UDP Helper
- IP unnumber, DDR
- Keep alive, PDP (compatible with CISCO)
- NetFlow, IP SLA
- TFTP Client/Serv, FTP Client
- SNTP, job/schedule
- PNP
- ALIAS
- Reverse telnet, VTY binding

Network Security

Firewall

- ASPF state detection
- SYN flood, UDP flood or ICMP flood protection
- ARP attack protection, ARP-SCAN and DHCP-Snooping
- Prevention of Ping of Death, Tear-drop, Land-Based, Win Nuke, Ping Sweep, ARP attack and IP-Spoofing

VPN

- IKE, IPSec, DMVPN, EZVPN
- L2TP, PPTP, GRE, EoGRE
- VPN stacking

Reliability

Backup function

- Interface backup
- Route backup
- E-Backup, Keep alive Ethernet remote monitoring
- VRRP, HSRP
- Bandwidth based load sharing and backup
- Traffic based load balancing and backup

BFD

- BFD for RIP, OSPF, BGP, MPLS and VRRP

QoS

Congestion management

- FIFO, PQ, CQ, WFQ, CBWFQ

Congestion avoidance

- WRED/RED

Traffic shaping

- GTS (Generic Traffic Shaping)

Others

- GBSC, Layer7filter

Traffic classification

- ACL Flow Classification
- IP Precedence Flow Classification
- DSCP flow classification
- MAC address classification
- 802.1P classification

Management

- SNMP, MIB, SYSLOG, RMON
- Console/Telnet/VTY/SSH/HTTP

Technical Parameters

Items	BSR2900-20C	BSR2900-40C
Interface		
Console(RJ45)	1	1
USB2.0	1	1
Interface	Gigabit Rj45	4
	Gigabit SFP	2(combo)
RST	1	1
Encryption engine	Built-in	Built-in
Performance		
Throughput	3Mpps	5Mpps
Flash	32MB	32MB
DRAM	1GB	1GB
Appearance		
Consumption	No-load	≤10W
	Full-load	≤15W
Total output BTU (note: 1000 BTU/hr = 293W)	51.9	85.32
Chassis	Dimensions mm (WxDxH)	300x200x44
	Weight (kg,empty)	1.7
Package	Dimensions mm (WxDxH)	454x96x287
	Weight(kg)	2.7
Operating temperature	humidity	0°C ~ 50°C
	humidity	0%~85% (non-condensing)
Storage	temperature	-40°C+85°C
	humidity	5%~95% (non-condensing)
Fan	Fanless	Fanless
Noise@25°C (dBA)	0	0
Power supply	AC 100~240V 50/60Hz	AC 100~240V 50/60Hz
Accessory	Console cable, power adaptor	Console cable, power adaptor

Ordering Information

Model	Description
BSR2900-20C	BSR2900-20C Multi-service Enterprise Gateway (1-Port RJ45 console, 1-Port USB2.0, 2-Port Gigabit RJ45/SFP combo, 2-Port Gigabit RJ45; single AC-220V power supply)
BSR2900-40C	BSR2900-40C Multi-service Enterprise Gateway (1-Port RJ45 console, 1-Port USB2.0, 4-Port Gigabit SFP, 4-Port Gigabit RJ45; dual AC-220V power supplies)

Copyright © Shanghai BDCOM Communication Technology Co., Ltd. 2023. All Rights Reserved.

This document is BDCOM Public Information. BDCOM reserves the right to alter, update and otherwise change the information contained in the document from time to time.
www.bdc.com.cn

