

## DS-D5B65RB/D Interactive Flat Panel



The Interactive Flat Panel (hereafter referred to as the “device”) integrates functions of computers, projectors, interactive whiteboards, sound boxes, cameras (optional), bluetooth remote control (optional), HDTVs, advertising machines and so on. The device integrates technologies like 4K display, infrared touch, human-machine interaction, multi-media information processing, and network transmission and provides users with various features such as writing, annotating, multi-screen sharing, pen detection and remote video call (optional). The Interactive Flat Panel is mainly used for remote video conferences, trainings and guidance, medical consulting, and other events in kinds of offices, meeting rooms, multi-media classrooms, exhibition halls and so on.

- Ultra HD display with up to 3840 × 2160 resolution of input signal available.
- 20px ultra fine writing, and 2 mm diameter recognizable with the precision of 1 mm.
- Built-in Wi-Fi realizes screen sharing without any cable connection.
- Built-in interactive whiteboard system allows annotating and sharing by QR code.
- Looping-out display available.
- Various audio and video interfaces for device access.
- Built-in network switch chip saves a network switch.
- Built-in Android system provides kinds of applications.
- Compatible with OPS/OPS-C devices, realizing smooth switch between built-in systems.
- Ultra-thin design with aluminum profile frame.


## ▪ Specification

Model		DS-D5B65RB/D
<b>Product Model</b>	Product Model	DS-D5B65RB/D
<b>Display</b>	Screen Size	65 inch LED Backlight
	Backlight	DLED
	Pixel Pitch	0.124 (H) × 0.372 (V) mm
	Resolution	3840 × 2160@60 Hz
	Brightness	350 cd/m <sup>2</sup>
	Color Depth	10 bit
	Contrast Ratio	1200 : 1 (Typ.)
	Response Time	6 ms
	Color Gamut	90% NTSC (CIE1931) (Typ.)
	Refresh Rate	60 Hz
	Viewing Angle	178° (H) / 178° (V)
<b>Built-in System</b>	Operation System	Android 11
	Processor	A72*2 + A53*4, 1.8 GHz
	Memory	4 GB
	Built-in Storage	64 GB
	NIC	Built-in 1000 Mbps NIC, supporting routing; IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO, supporting both 2.4 GHz and 5GHz bands
<b>Touch</b>	Type	Infrared touch screen
	Glass	AG smooth glass
	Touch Point	Max 45 point multi-touch
	Touch Response Time	< 10 ms
	Touch Precision	± 1 mm (≥ 90% touching area)
<b>Internal Function</b>	Loudspeaker	Built-in 2 × 16 W loudspeaker
	Bluetooth	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version
<b>Interface</b>	Video & Audio Input	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1
	Video & audio output	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1
	Control interface	RS-232 × 1, Touch-USB × 1
	Network Interface	RJ45 (1000 Mbps port) × 2

	Data Transmission Interface	USB-C × 1, USB-A × 2 on front panel, USB-A × 2 on rear panel
<b>Power</b>	Power Consumption	≤ 320 W (full load)
	Standby Consumption	0.5 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C ( 32 °F to 104 °F)
	Working Humidity	10% to 90% RH
<b>General</b>	Power	100 to 240 V, AC, 50/60 Hz
	Product dimensions	1507 × 930 × 86 mm
	Package Dimensions (W × H × D)	1687 × 1061 × 234 mm
	Net Weight	40.36 kg
	Gross Weight	50.69 kg
	Lifespan	50000 hours
<b>Camera</b>	Pixel	8 MP
	Camera Function	Smart switch between Android system and OPS
	Field Angle	120°(diagonal), 110°(horizontal), 66°(vertical)
	Distortion	≤6%
	Camera Resolution Ratio	Up to 4K
<b>Microphone</b>	Specification	Omni-directional 6-array layout
	Mic Function	Echo reduction and smart noise-cancellation
	Voice Distance	8 m
	Sampling Rate	32 K
	Mic Sampling Rate	16 bit

## Physical Interface

Interface	Description	Interface	Description
1.LINE OUT	Earphone Interface	2.LINE IN	Audio Input Interface
3.RS-232	RS-232 Serial Port	4.TOUCH-USB	Peripheral Touch Interface
5.LAN 2	Ethernet Interface 2	6. LAN 1	Ethernet Interface 1
7.HDMI 2	HDMI Input Interface 2	8.HDMI 1	HDMI Input Interface 1
9.USB 3.0	USB 3.0 Interface	10.MULTI-USB	Multi-functional USB Interface
11.HDMI OUT	HDMI Output Interface		

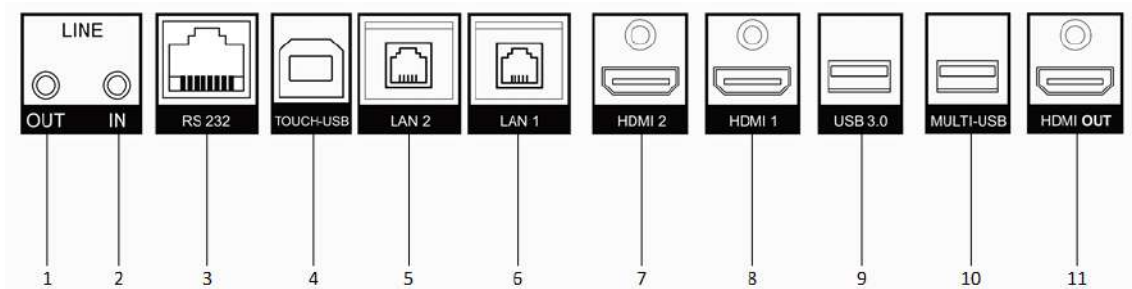

## Available Model

DS-D5B65RB/D

## Dimension

