


AE-VC211T-IRS series HD 1080P Mini Dome Camera



Key Features

- 2 megapixel progressive CMOS sensor
- Up to 1080P resolution
- Smart IR, AGC
- RGBIR
- Internal 3-axis adjustment
- Built-in microphone

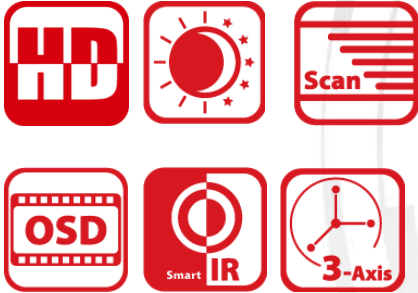

Specifications

Camera

Image Sensor	2 megapixel progressive CMOS sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) × 1080 (V)
Min. illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 s (1/30 s) to 1/50,000 s
Lens	3.6 mm , 2.8mm
Lens Mount	M12
Day & Night	Auto day & night
Angle Adjustment	Pan: -30° to 30°, Tilt:0° to 75°, Rotate: -180° to 180°
Synchronization	Internal Synchronization
Video Frame Rate	1080P@25fps, 1080P@30fps
S/N Ratio	42 dB

Interface

Video Out	1-ch, Aviation Port
Audio In	Built-in Microphone
Audio Out	1-ch, Aviation Port (Linear Level, 1KΩ)
Aviation Plug	Pin 1: Video, Pin 2: Audio, Pin 3: Power, Pin 4: GND

General

Operating Conditions	Temperature: -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (no condensation)
Power Supply	DC 9V~16 V
Power Consumption	Max. 4 W
IR Distance	10 m to 20 m
Dimensions	97 mm × 99.5 mm × 46.6 mm (3.82" × 3.92" × 1.83")
Weight	Approx. 300 g (0.66 lb.)

Order Models

AE-VC211T-IRS (2.8mm)

AE-VC211T-IRS (3.6mm)