



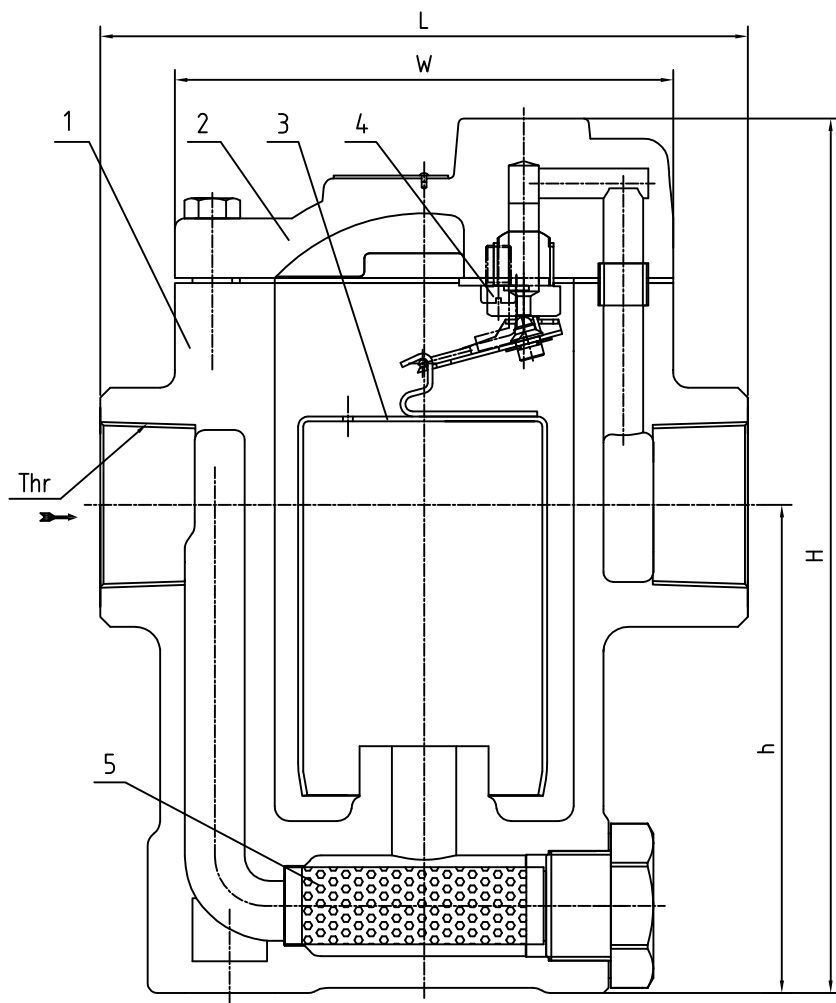


DN	L	H	W	h	Thr	W.T/Kg
15	130	200	100	98	NPT 1/2"	4
20	130	200	100	98	NPT 3/4"	4
25	130	200	100	98	NPT 1"	4

No.	Technical Performance	
1	Media	Steam, Water
2	PRESSURE	PN16
3	PMO	1.6MPa
4	Δ PMX	1.6MPa
5	TMO	350°C
6	RSN	$\leq 0.5\%$
7	RPB	$\geq 80\%$
8	Max. Discharge	480Kg/h

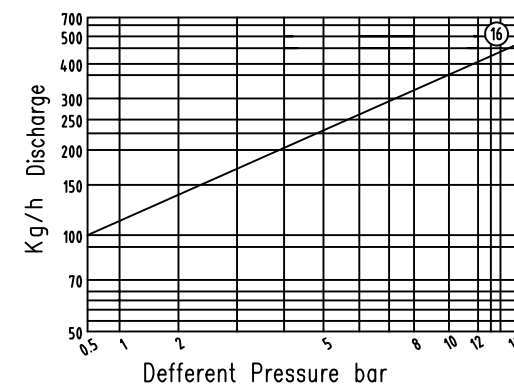

Techno-request	
Design standard	ASTM F1139
F to F Dim	ISO 6554
Connection Std.	ASME B1.20.1
Test&inspection	ISO 6948

Application:
Drain out condensed water
from steam pipeline.

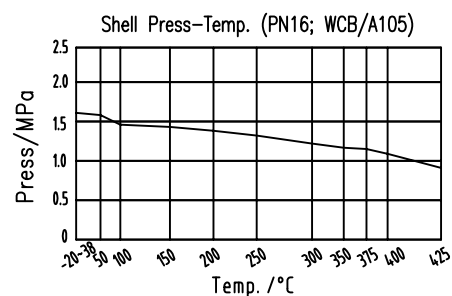

No.	Main Parts And Mat	
1	Body	WCB
2	Bonnet	A105
3	Bucket	SS304
4	Trim	SS304
5	Filter	SS304

VNMV Zhejiang Newton Fluid Control Co., LTD.

DRAWN:		INVERTED BUCKET STEAM TRAP	
CHECKED:			
APPROVED:		CAST STEEL	
DATE:	2025.03.03		
PROPORTION:		FIG NO:	SBT10AT-16