




FID FOLDING BENCH

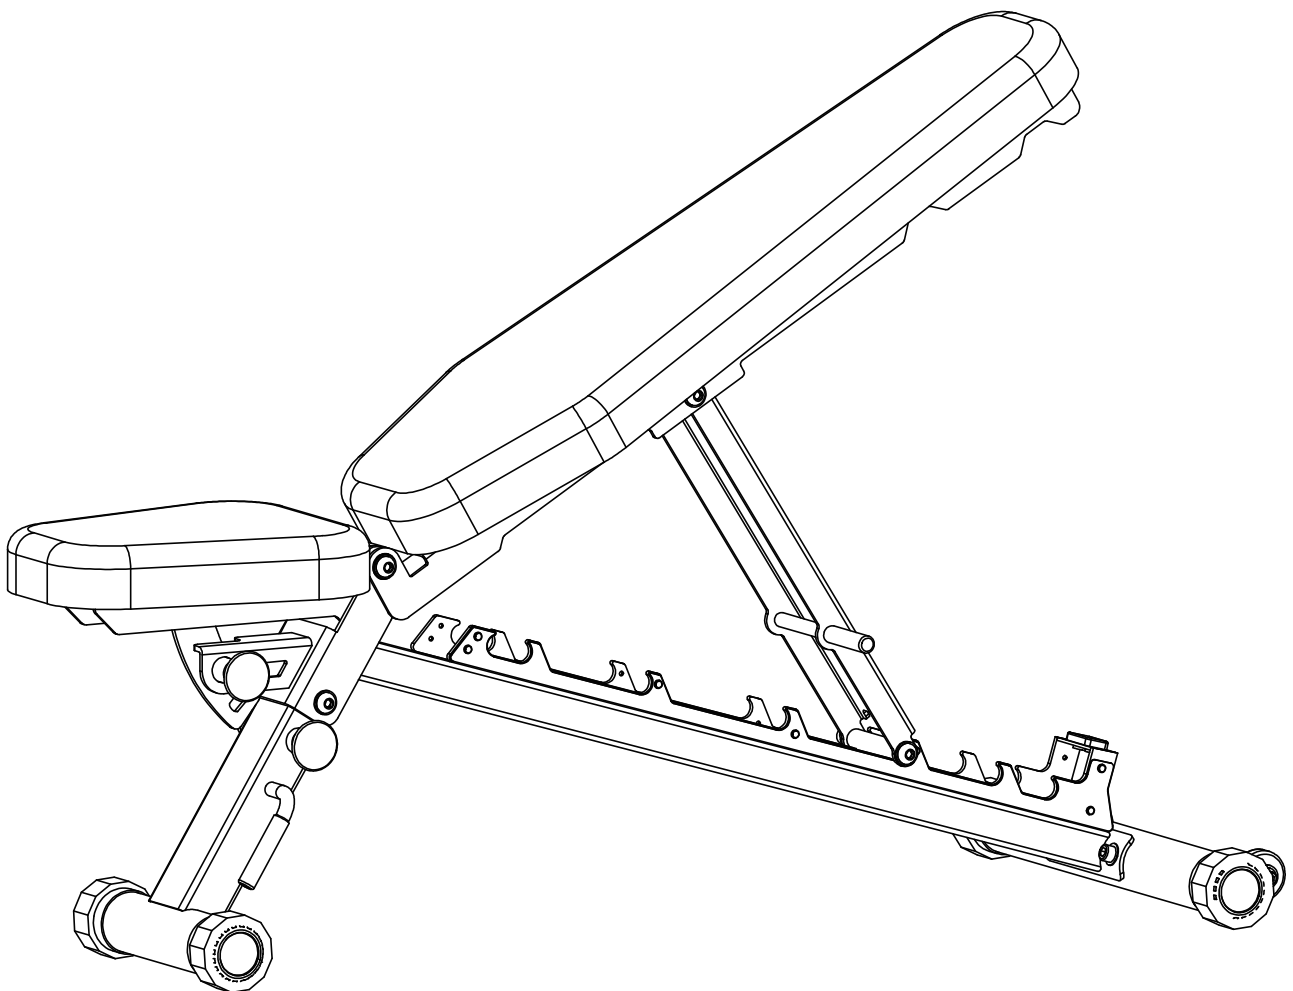

Operator's Manual

Read the Operator's Manual entirely. When you see this symbol, the subsequent instructions and warnings are serious follow without exception. Your life and the lives of others depend on it!




ITEM#6921




7 31199 68415 2

ASSEMBLY PARTS DIAGRAM / EXPLODED VIEW

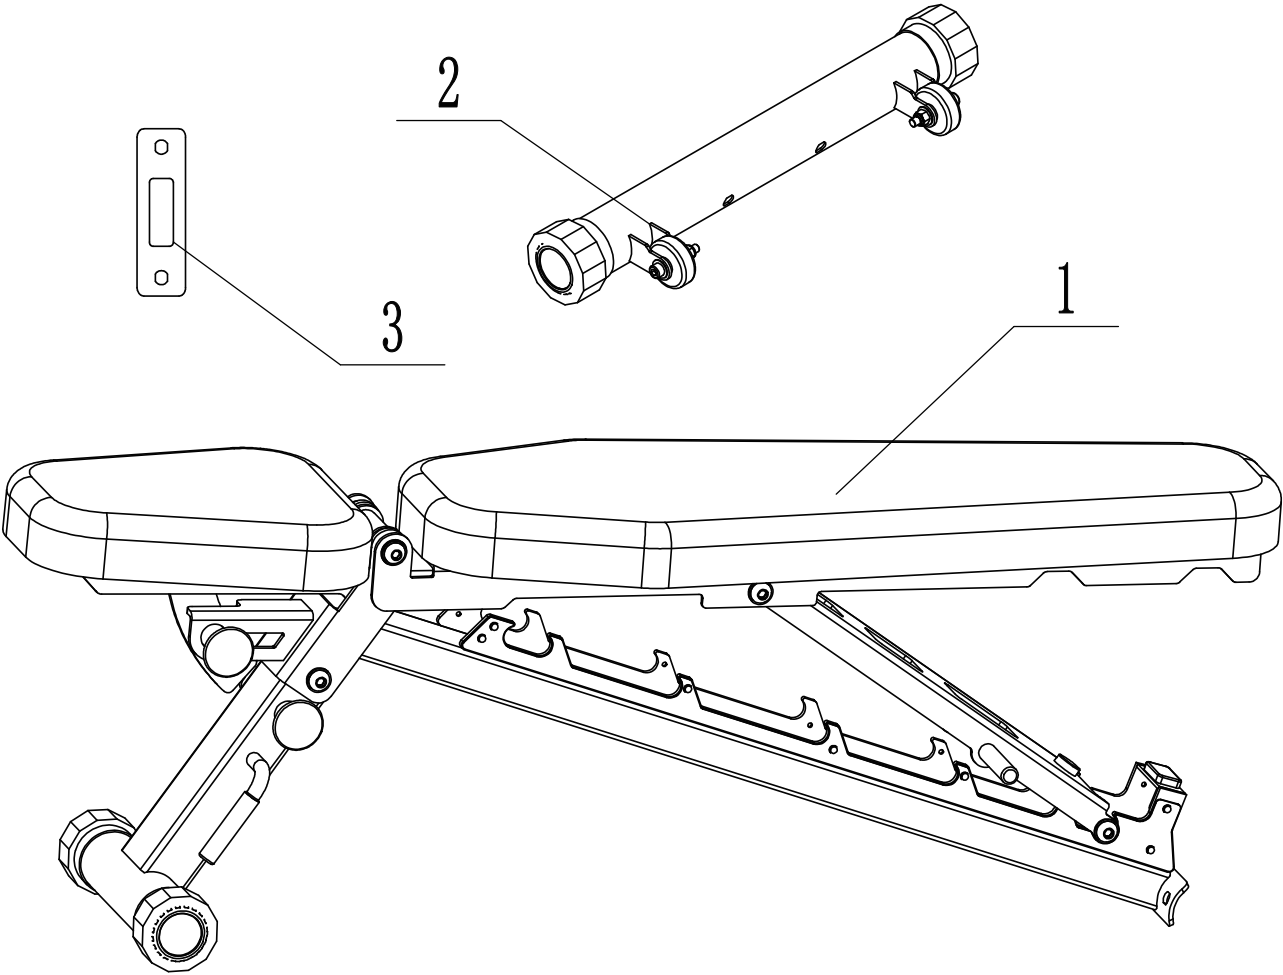


NO.	Article	QTY
(1)	Main frame	1
(2)	Rear connection tube	1
(3)	Round plate	1


HARDWARE PACK

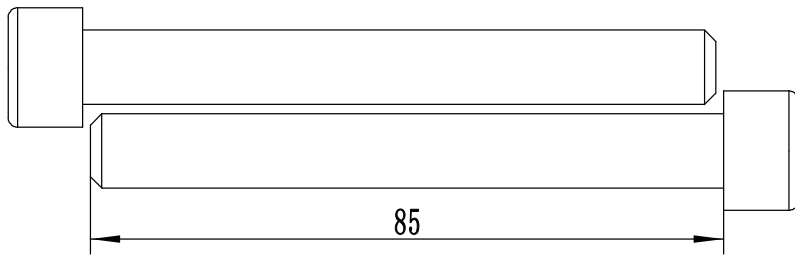



NO.6 M10x85(2)



NO.8 M10(2)

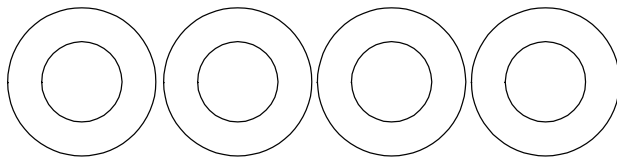

NO.7 Ø10(4)

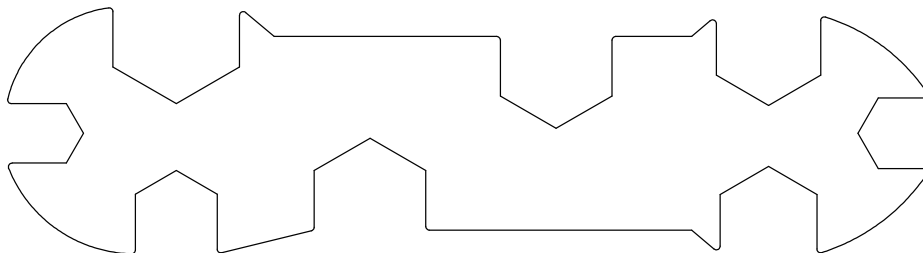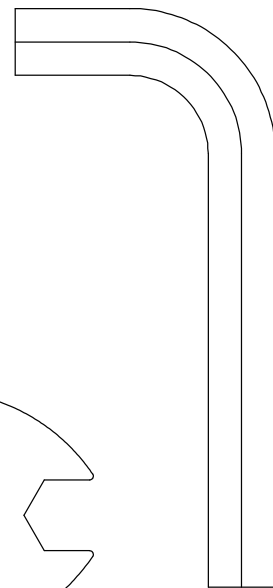


Universal Wrench(1)

8# Allen Wrench(1)

ASSEMBLY INSTRUCTIONS


STEP 1

1. Connect Rear connection tube (2) with main frame (1) and Round plate (3),
Use Cylinder head hex bolt (6) and Washer (7) .Self locking nut (8) .
2. Screw up all the bolts after checking machine is in good working.

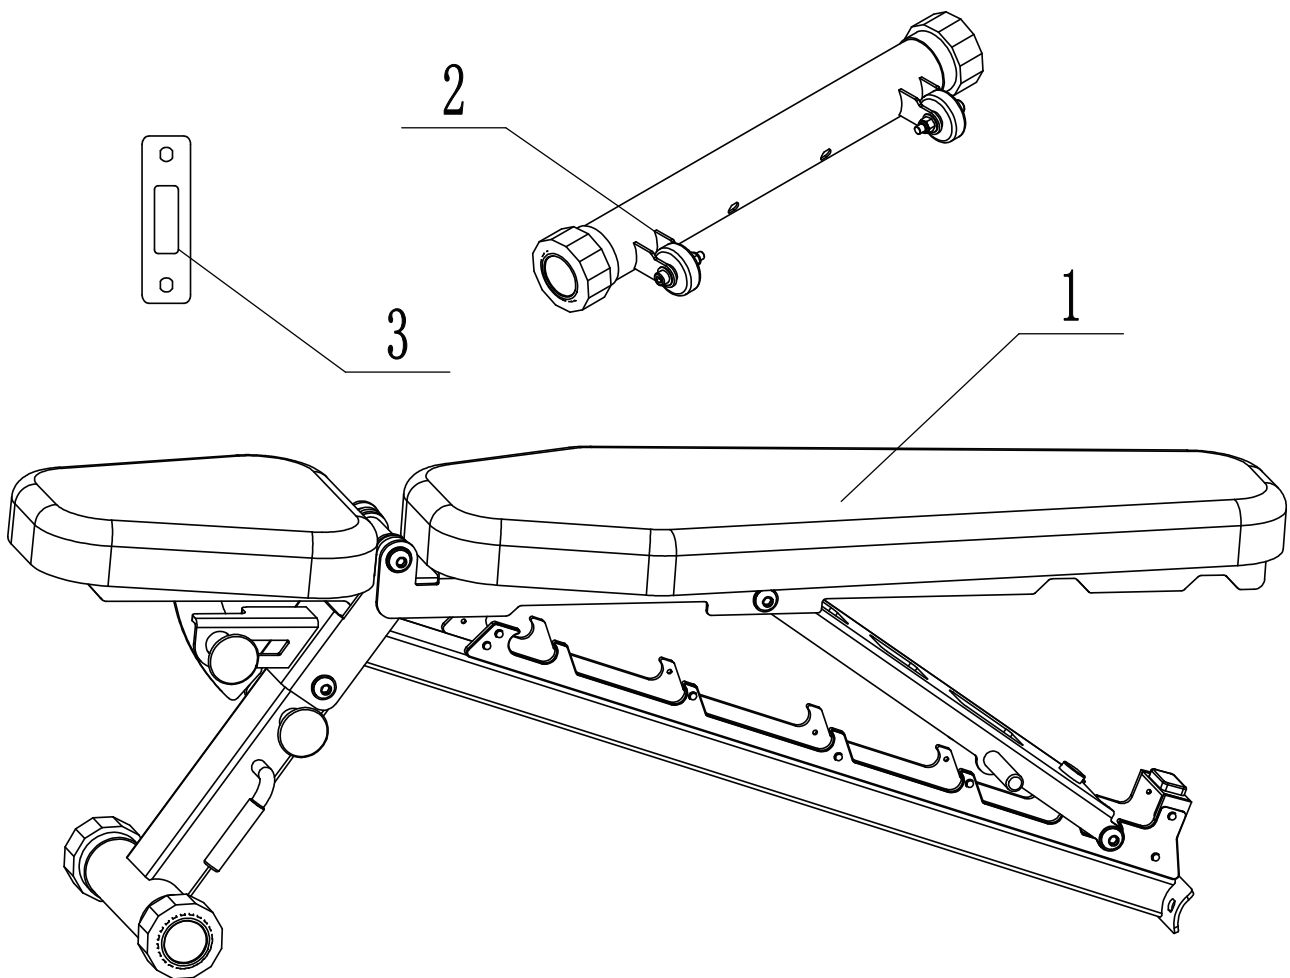

KEY	DESCRIPTION	SPECIFICATION
(1)	Main frame	
(2)	Rear connection tube	
(3)	Round plate	
(6)	Cylinder head hex bolt	M10×85
(7)	Washer	Φ10
(8)	Self locking nut	M10

APPENDIX-FULL ASSEMBLY/EXPLODED VIEW/FULL PARTS LIST

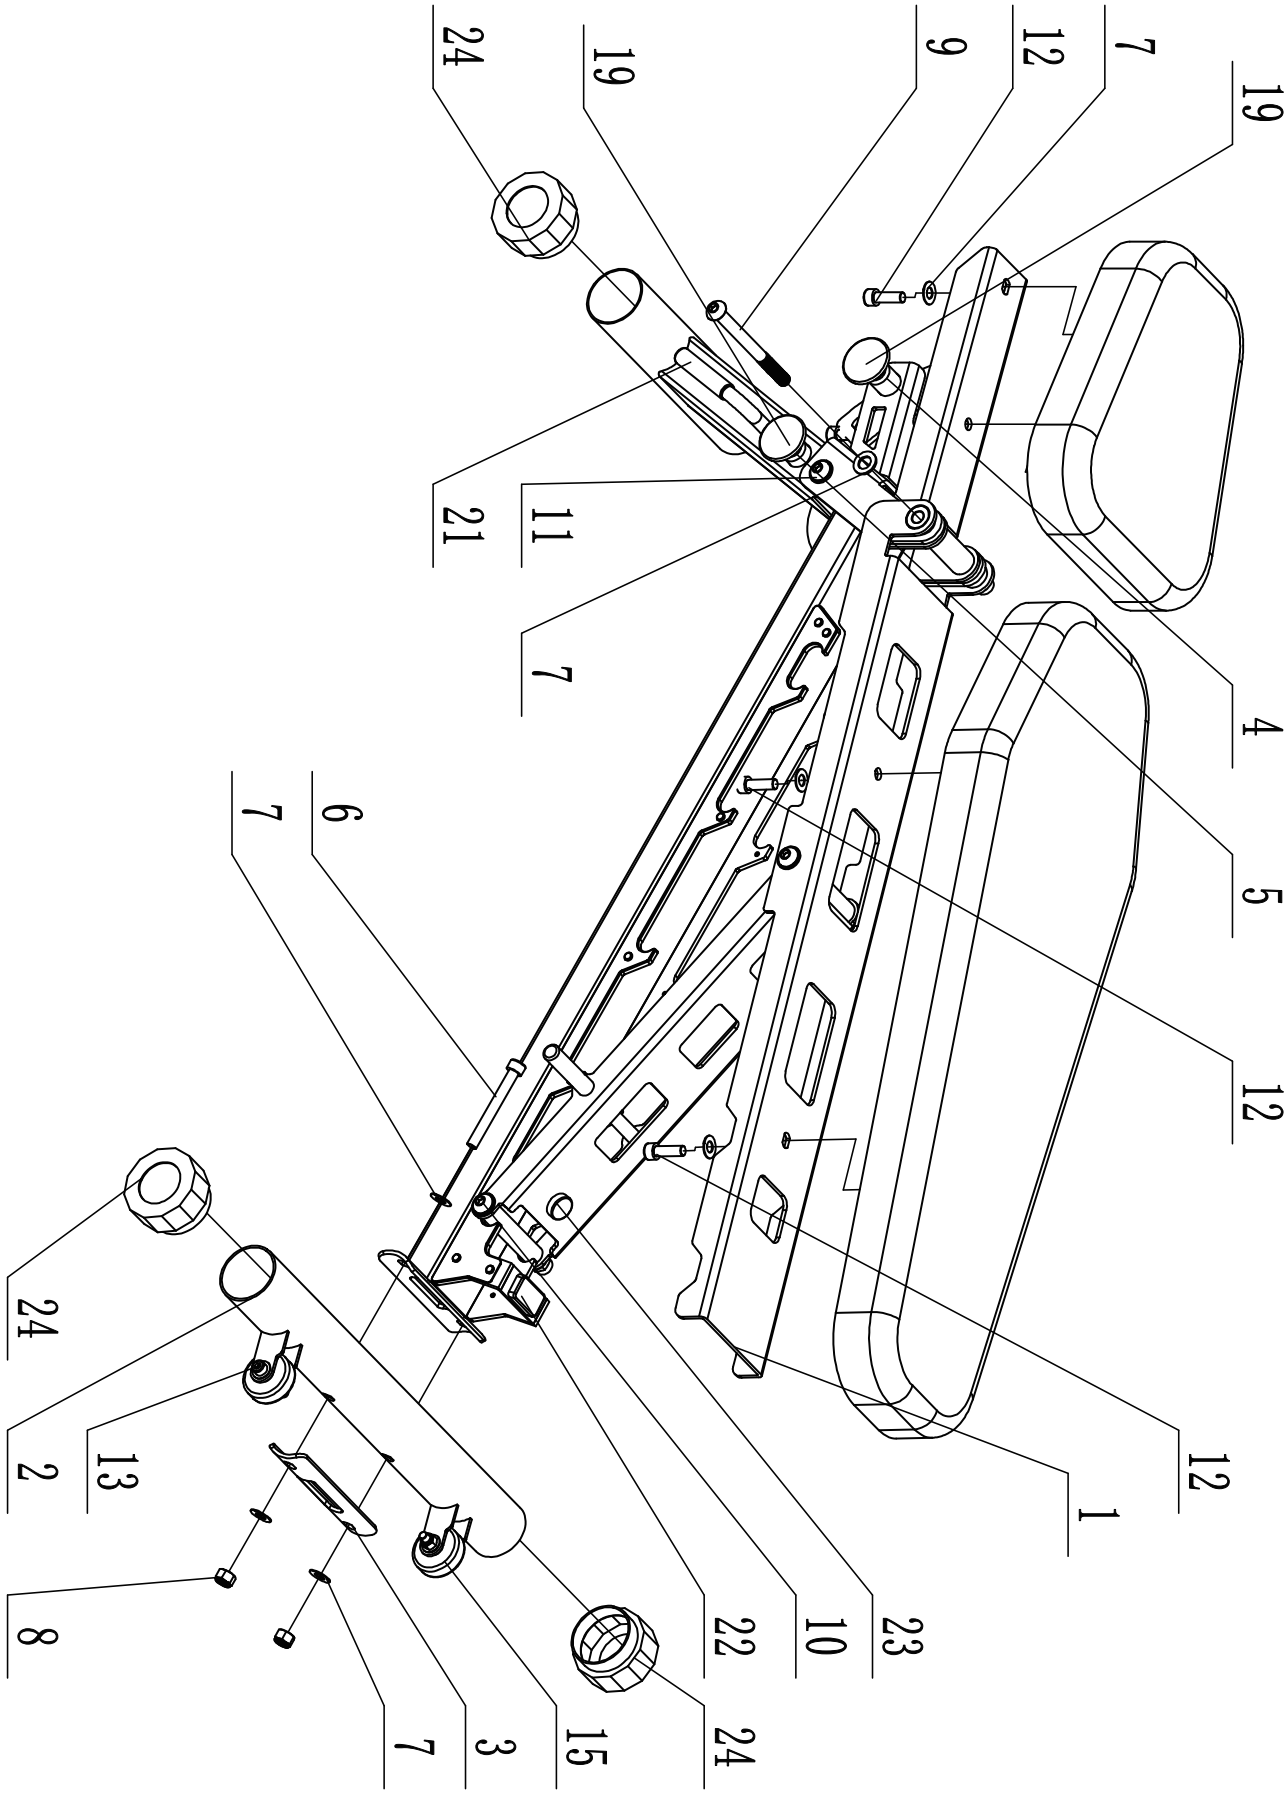

APPENDIX-FULL PARTS LIST

NO.	DESCRIPTION	SPECIFICATION	QTY
1	Main frame		1
2	Rear connection tube		1
3	Round plate		1
4	Selector shaft 1		1
5	Selector shaft 2		1
6	Cylinder head hex bolt	M10×85	2
7	Washer	Φ10	8
8	Self locking nut	M10	2
9	Semi-cylinder head hex bolt	M12*145	2
10	Semi-cylinder head hex bolt	M12*125	1
11	Semi-cylinder head hex bolt	M12*110	1
12	Cylinder head hex bolt	M10*30	4
13	Cylinder head hex bolt	M8*50	2
14	Washer	Φ8	4
15	Wheel	D50	2
16	Washer	Φ12	8
17	Self locking nut	M12	4
18	Self locking nut	M8	2
19	Yellow aluminum selector head		2
20	Spring	Φ12	2
21	Yellow handle grip	Φ12.7*80	2
22	Square buffer	25*45	1
23	Stopper gasket	Φ25*8	1
24	Foot cover	Φ60	4