


# Inner Supports



## PRODUCT PROFILE

Exir Broadcasting manufactures inner supports for all our rigid lines. The supports are designed to maintain excellent connectivity in rigid line and flange connections. Silver-plated brass is used for the inner conductor. The ends are slotted and a cir-clip ensures excellent contact. All the support plates are made of high quality teflon (PTFE) that has been controlled and adjusted before manufacturing.

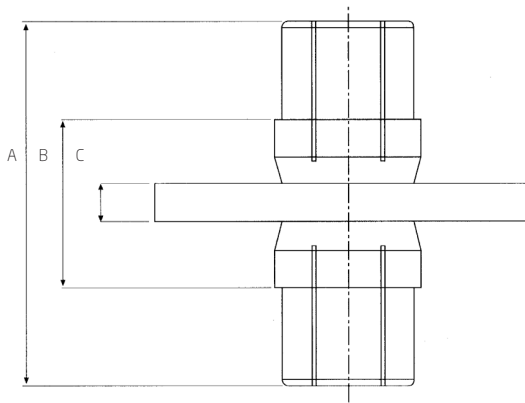

LINE TYPE	ARTICLE	Dim. A	Dim. B	Dim. C
7/8" unflange	R078-ISUP-AA00	49,0 mm (1,93 in)	23,8 mm (0,94 in)	5,0 mm (0,20 in)
7/8" flange	078F-ISUP-A0	49,0 mm (1,93 in)	23,8 mm (0,94 in)	4,7 mm (0,19 in)
1 5/8" unflange	R158-ISUP-A0	58,5 mm (2,30 in)	28,7 mm (1,13 in)	6,3 mm (0,25 in)
1 5/8" flange	158F-ISUP-A0	59,4 mm (2,34 in)	28,4 mm (1,12 in)	6,3 mm (0,25 in)
3 1/8" unflange	R318-ISUP-A0	76,3 mm (3,00 in)	45,3 mm (1,78 in)	8,2 mm (0,32 in)
3 1/8" flange	318F-ISUP-A0	76,3 mm (3,00 in)	45,3 mm (1,78 in)	9,5 mm (0,37 in)
RL98 unflange	RL98-ISUP-A0	92,3 mm (3,63 in)	32,2 mm (1,27 in)	8,2 mm (0,32 in)
4 1/2" unflange	R412-ISUP-A0	108,5 mm (4,27 in)	47,5 mm (1,87 in)	9,4 mm (0,37 in)
4 1/2" flange	412F-ISUP-A0	100,6 mm (3,96 in)	45,6 mm (1,80 in)	9,8 mm (0,38 in)
NAX120 unflange	R120-ISUP-A0	92,2 mm (3,63 in)	32,2 mm (1,27 in)	8,2 mm (0,32 in)
6 1/8" unflange	R618-ISUP-A0	108,0 mm (4,25 in)	63,0 mm (2,48 in)	8,2 mm (0,32 in)
6 1/8" flange	618F-ISUP-A0	108,0 mm (4,25 in)	63,0 mm (2,48 in)	11,1 mm (0,44 in)
RL230 unflange	R230-ISUP-A0	219,8 mm (8,65 in)	139,8 mm (5,50 in)	16,0 mm (0,63 in)
RL230 flange	230F-ISUP-A0	228,0 mm (8,98 in)	148,0 mm (5,83 in)	25,0 mm (0,98 in)