

006-100F
006-101M




100 W dummy-load



Standards
NFC 96-315
MIL-DTL-39030



Impedance	50 Ω \pm 2%
Frequency	DC - 2.5 GHz
Max VSWR	\leq 1.10 at 1 GHz, \leq 1.20 at 2 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	100 W
Peak power	10 kW
Weight	1.4 kg

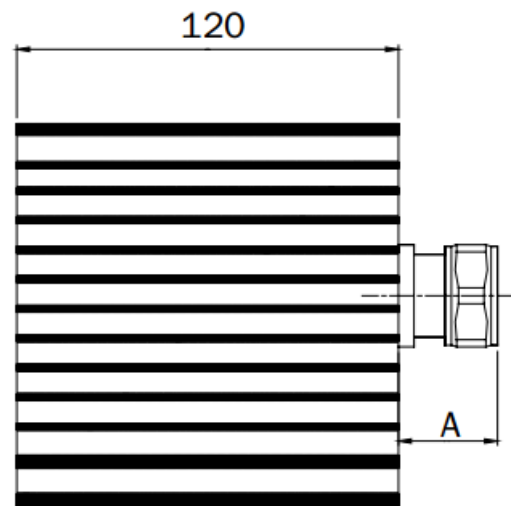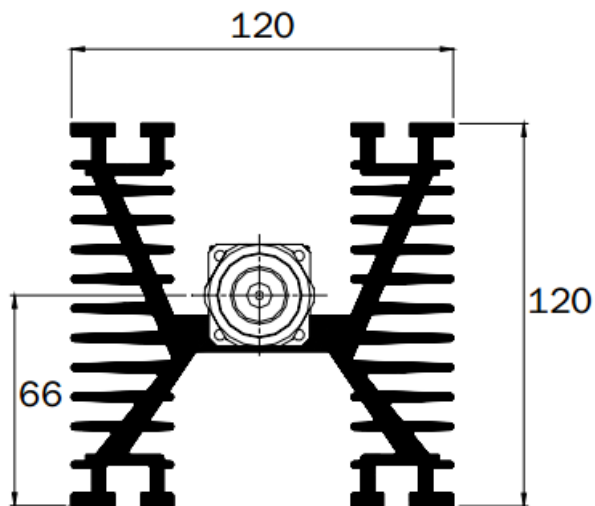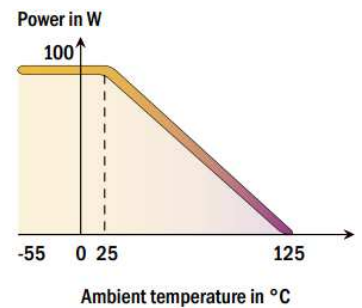

Dimensions in mm

006-100F: Connector: 7/16" female, A=22mm

006-101M: Connector: 7/16" male, A=31mm

Options:

Also available with N-male or N-female