




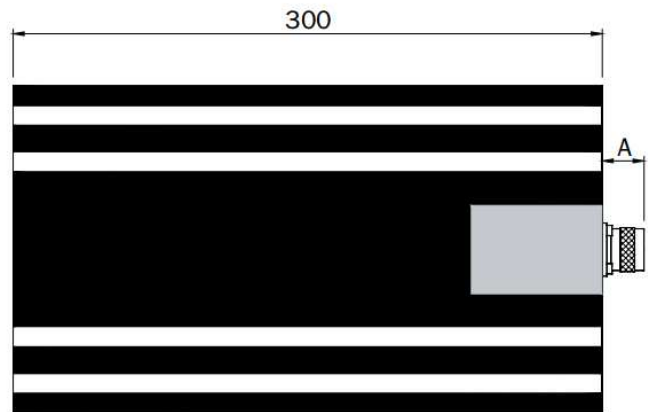

Standards  
NFC 96-315  
MIL-DTL-39030

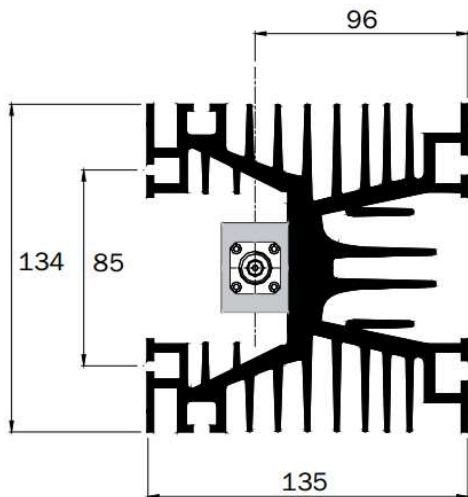

Impedance	50 Ω ± 5%
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	400 W
Peak power	40 kW
Weight	4.2 kg

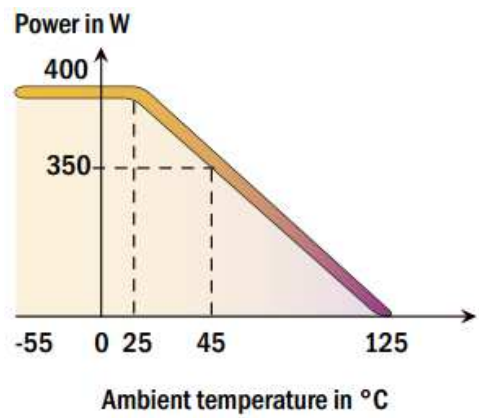

Dimensions in mm

**006-1130:** Connector: 7/16" female (A= 32mm)

**Options:**

Also available with N male (A=21mm) or N female (A=19mm) connections  
N female version also available with thermoswitch 90°C or 120 °C