


FM Constant Impedance Combiner

26 kW, 2 Pole

BAND II


10
year
GUARANTEE

SPECIFICATIONS	200 mm Series	Option
FREQUENCY	87 - 108 MHz	
STANDARD ORDER	2 Poles	with temperature compensation
APPLICATION	FM combining & Spurious suppress	
IMPEDANCE	50 Ohm	
NB RETURN LOSS (VSWR)	> 30 dB (1.07)	
WB RETURN LOSS (VSWR)	> 30 dB (1.07)	
MAX OUTPUT POWER RATING**	49 kW rms (3 1/8" output), 80 kW rms (4 1/2" output)	
NB INPUT CONNECTOR	3 1/8" unflange	4 1/2" unflange
WB INPUT CONNECTOR	3 1/8" unflange	4 1/2" unflange
OUTPUT CONNECTOR	3 1/8" unflange	4 1/2" unflange
TEMPERATURE STABILITY	≤ 3 kHz / °C (without temp. comp.)	≤ 0.5 kHz / °C (with temp. comp.)
MAX PRODUCT TEMPERATURE	70 °C	
ENVIROMENTAL CONDITION	0 to 70 °C IP40	

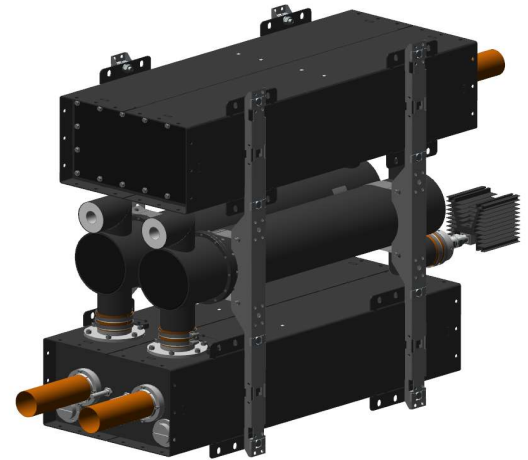

DIMENSIONS AND WEIGHT	
DIMENSIONS	1366 x 439 x 935 mm
L x W x H	(53.8 x 17.3 x 36.8 in)
WEIGHT	95 kg (209.4 lb)
STANDARD FRAME	Stand alone
COLOUR	Black and aluminium

Temperature rise Loss /Power


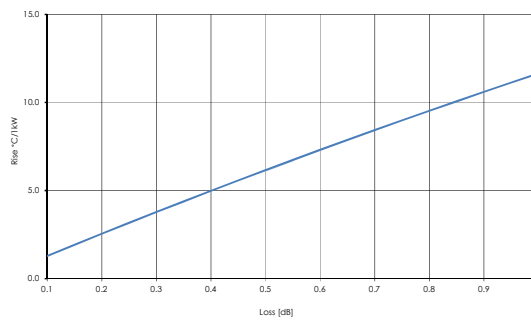


TYPICAL DATA*	STANDARD TUNED	SHARP TUNED
ARTICLE NO	CI22C20x-0PBBxxx	CI22C20x-0PBBxxx
NB INSERTION LOSS		
Centre frequency	<0.20 dB	<0.45 dB
Effective passband @ ± 200 KHz	<0.20 dB	<0.45 dB
± 150 KHz	<0.20 dB	<0.65 dB
± 200 KHz	<0.20 dB	<1.05 dB
± 0.6 MHz	>0.5 dB	>11.0 dB
± 1.0 MHz	>3.0 dB	>19.5 dB
± 2.0 MHz	>12.0 dB	>31.0 dB
± 2.5 MHz	>15.0 dB	>35.0 dB
NB GOUPELADY VARIATION		
(typical)	± 150 KHz <6 ns (5 ns)	<120 ns (115 ns)
	± 200 KHz <10 ns (8 ns)	<150 ns (146 ns)
WB INSERTION LOSS		
± 0.8 MHz	-	<0.25 dB
± 1.0 MHz	-	<0.15 dB
± 1.5 MHz	<0.95 dB	<0.10 dB
± 2.0 MHz	<0.40 dB	<0.08 dB
± 3.0 MHz	<0.12 dB	<0.08 dB
ISOLATION		
NARROWBAND - WIDEBAND	>36 dB	>36 dB
WIDEBAND - NARROWBAND @		
± 1.0 MHz	>39 dB	>55 dB
± 1.5 MHz	>43 dB	>62 dB
± 3.0 MHz	>54 dB	>74 dB
NB MAX INPUT POWER RATING**	26 KW RMS	8 kW RMS

Article structure:

ARTICLE: CI22C20C-0PBB333

- CI** = Combiner Type
- 2** = Frequency band
- 2** = Number of poles
- C** = Cavity based
- 20** = Cavity size
- C** = Version
- C = without temp. comp. D = with temp. comp.
- 0** = Number of cross coupling
- 0 = without
- P** = Coating
- P = blackpainted
- B** = Narrowband coupler
- B = 159mm
- B** = Wideband coupler
- B = 159mm
- 3** = Narrowband connection
- 3= 3 1/8" unflange
- 4= 4 1/2" unflange
- 3** = Wideband connection
- 3= 3 1/8" unflange
- 4= 4 1/2" unflange
- 3** = Output connection
- 3= 3 1/8" unflange
- 4= 4 1/2" unflange

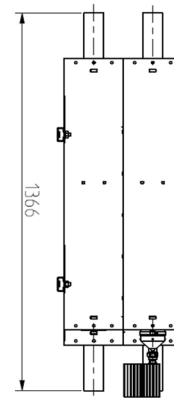

* Data in table is typical data. at 100 MHz. The combiner can be tuned for other specifications or bandwidth. Please contact us for a designed specification.

** All average power values and technical data refer to an ambient temperature of +20 °C with normal airflow. The product can have a maximum surface temperature of +70 °C. Maximum power capacity may be lower depending on channel allocation. Data are subjected to change without prior notice.