

FM Bandpass filter


32 kW, 2 Pole

BAND II

10 year GUARANTEE

PRODUCT FEATURES




- Flexible design
- Retunable 87 - 108 MHz
- Low insertion loss
- Temperature compensated
- 10-year comprehensive warranty

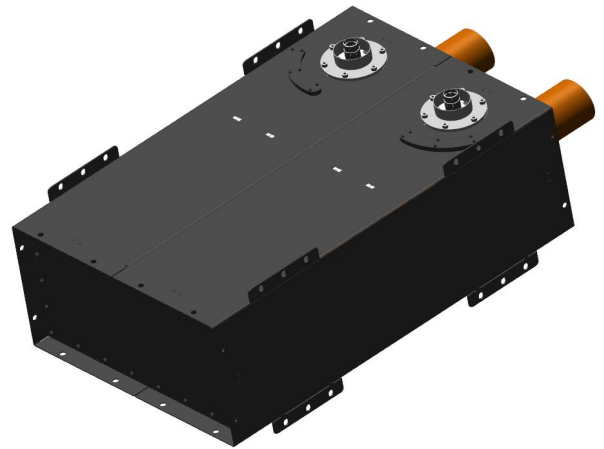

SPECIFICATIONS	350 mm Series	Option
FREQUENCY	87 - 108 MHz	-
STANDARD ORDER	2 poles	with temperature compensation
IMPEDANCE	50 Ohm	-
TEMPERATURE STABILITY	< 3 kHz / °C (without temp. comp.)	< 0,5 kHz / °C (with temp. comp.)
MAX PRODUCT TEMPERATURE	70 °C	-
ENVIROMENTAL CONDITION	0 to 70 °C IP40	-
CONNECTIONS	3 1/8" unflange	4 1/2" unflange

DIMENSIONS AND WEIGHT

DIMENSIONS	1166 x 609 x 414 mm
L x W x H	(45.9 x 24 x 16.3 in)
WEIGHT	35 kg (77.2 lb)
STANDARD FRAME	Stand alone
COLOUR	Frosted black

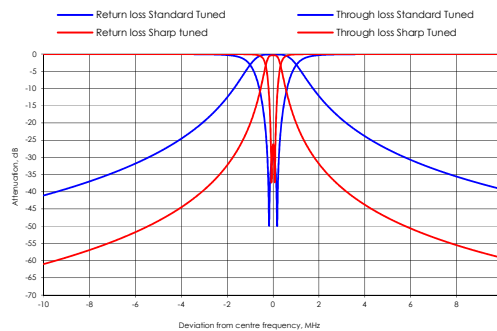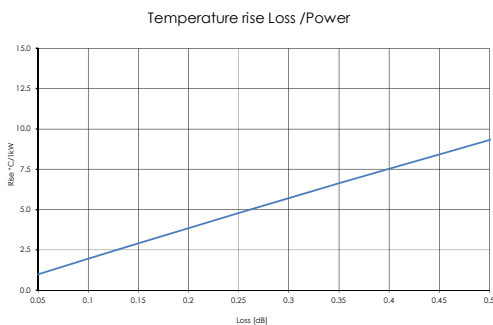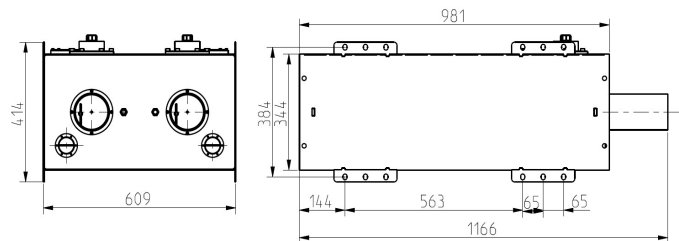

Article structure: ARTICLE: BPF22C35A-0P33

- BPF** = Filter Type
- 2** = Frequency band
- 2** = Number of poles
- C** = Cavity based
- 35** = Cavity size
- A** = Version
A= without temp. comp.
B= with temp. comp.
- 0** = Number of cross coupling
- P** = Coating
- 3** = Input connection
3= 3 1/8" unflange, 4= 4 1/2" unflange
- 3** = Output connection
3= 3 1/8" unflange, 4= 4 1/2" unflange

TYPICAL DATA*	Standard tuned	Sharp tuned
ARTICLE NO	BPF22C35x-0Pxx	BPF22C35x-0Pxx
RETURN LOSS (VSWR)	>30 dB (<1.07)	>25 dB (<1.10)
INSERTION LOSS		
Centre frequency	<0.10 dB	<0.25 dB
Effective passband @ ± 200 kHz	<0.10 dB	<0.25 dB
± 150 kHz	<0.10 dB	<0.45 dB
± 200 kHz	<0.10 dB	<0.80 dB
± 0.8 MHz	>1.5 dB	>16.0 dB
± 1.0 MHz	>3.0 dB	>19.5 dB
± 1.2 MHz	>4.5 dB	>23.0 dB
± 1.5 MHz	>7.5 dB	>26.5 dB
± 2.0 MHz	>12.0 dB	>31.0 dB
± 2.5 MHz	>15.0 dB	>35.0 dB
± 3.0 MHz	>18.0 dB	>38.0 dB
GROUP DELAY VARIATION		
(typical) ± 150 kHz	<6 ns (5 ns)	<125 ns (120 ns)
± 200 kHz	<10 ns (8.5 ns)	<160 ns (156 ns)
MAX INPUT POWER RATING**	32 kW rms	10 kW rms
TEMPERATURE RISE	1.6 °C / kW	5.0 °C / kW

* Data in table is typical data at 100 MHz. The filter can be tuned for other specification or bandwidth, please contact us for a designed specification.

** All average power values and technical data refer to an ambient temperature of + 20 °C with normal air flow. The product can have a maximum surface temperature of + 70 °C. Maximum power capacity may be lower depending on channel allocation. Data are subjected to change without prior notice.