




★ XB-D40



Product Feature

- Support WeChat, alipay and other payment bar code
- New decoding chip, interpretation of a variety of 1D/2D barcode
- High resilience buttons, not tired after long use
- Light code reading prompts to avoid missing codes
- Plug and play, simple setup, fast use

Application

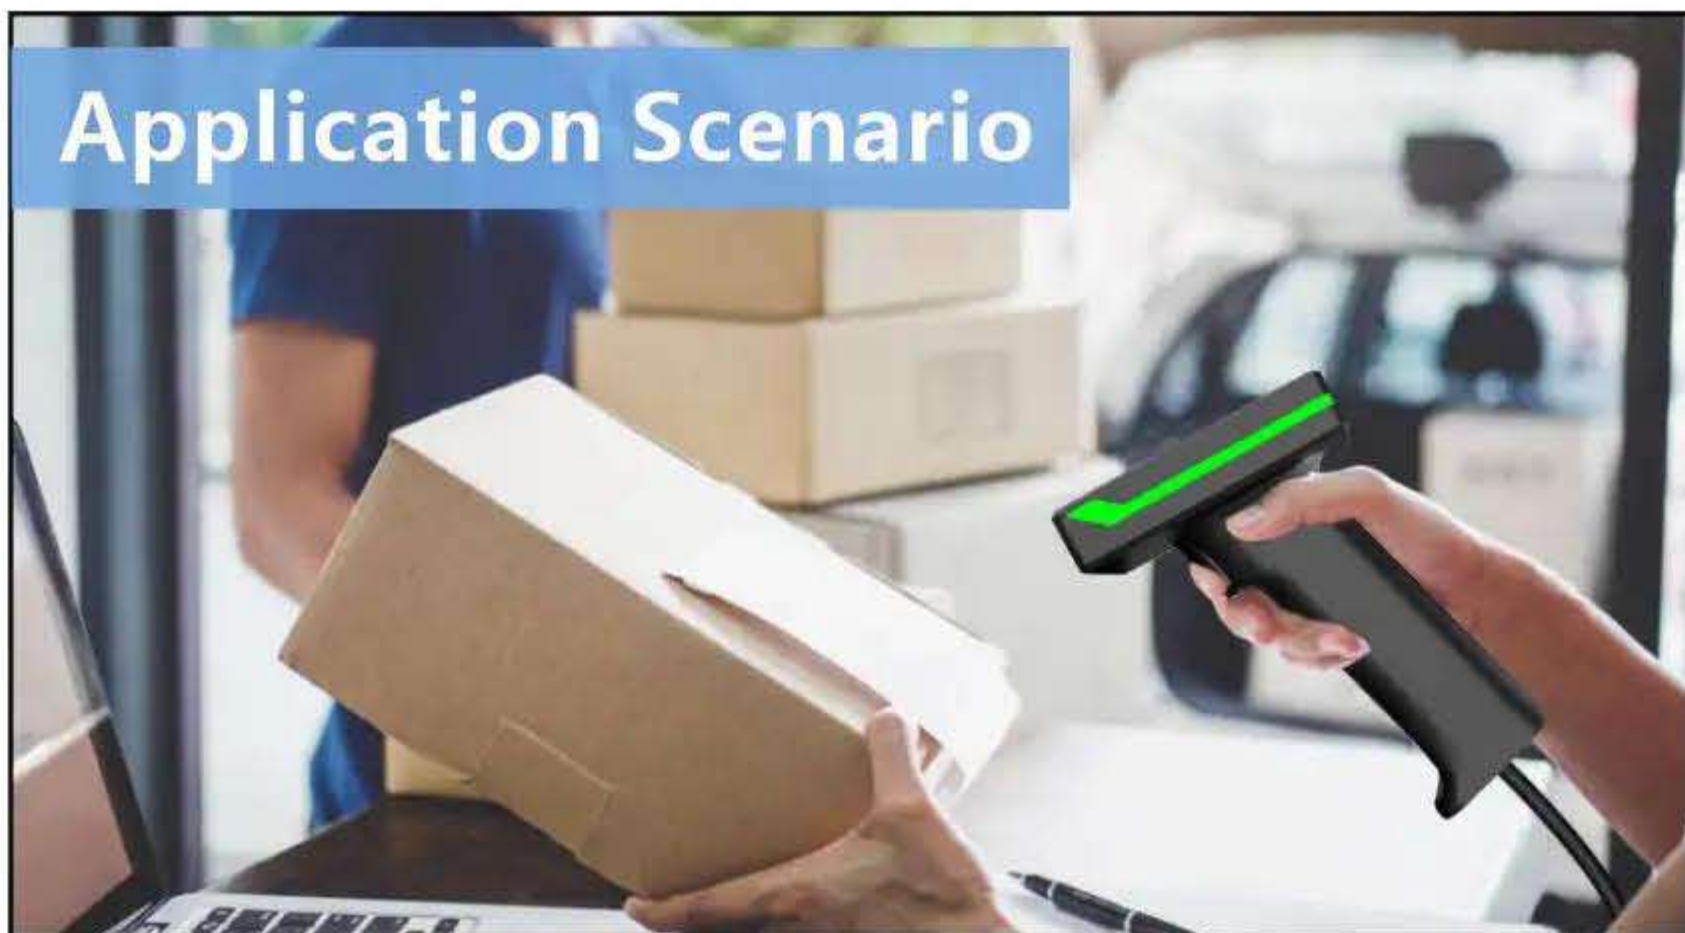

Specification

Performance Parameters	
Light Sources:	617nm LED Aimer, White LED
Supported Symbolologies:	1D: EAN13, EAN8, UPCA, UPCE0, UPCE1, Code 128, Code 39, Code 93, Codabar, Interleave 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code 11, MSI Code, MSI Plessey, RSS-14, Qualified RSS, Extended RSS. 2D: QR Code, Data Matrix(ECC200), PDF417.
Scan Type:	Image CMOS
Image Sensor:	640*480
Scan Mode:	Manual/Continuous/Automatic Induction Scanning
Precision:	1D ≥5mil, 2D ≥10mil
Scan Angle:	Yaw±60°, Rotation 360°, Pitch±60°
Depth of scan field:	35-190mm(EAN13, 13mil, PCS90%)
Error Rate:	1/5million
Interface :	USB-HID, RS232, USB-COM

Physical Parameters	
Material:	ABS+PC
Cable Length:	2M

Environmental Parameters	
Operating Temperature:	-20°C~60°C
Storage Temperature:	-40°C~70°C
Relative Humidity:	5% ~95% RH(Non-condensing)
Shock Resistance:	Withstands multiple times 1.5 meters drops to concrete

Electronic Parameters	
Working Voltage:	DC5V±5%
Working Current:	120mA