




Linear C-Track Roller Guides – 30 Lbs. Capacity – Dual Carriage Configuration

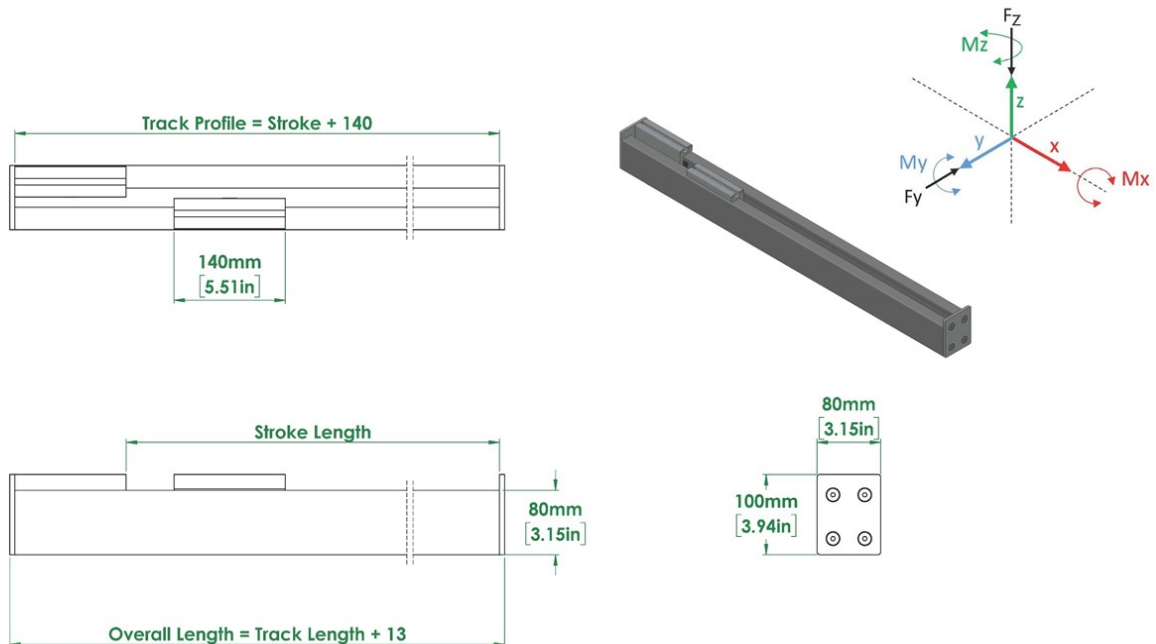

Model	Max Dynamic Load (Lb/N)	Max Static Load (Fz)(Lb/N)	Max Static Load (Fy)(Lb/N)	Static Moment Load (Mz-Yaw)(in-lb/Nm)	Static Moment Load (My-Pitch)(in-lb/Nm)	Static Moment Load (Mx-Roll)(in-lb/Nm)
CGRG30	30 / 133 (ea.)	45 / 200 (ea.)	NA	NA	70.8 / 8	NA
Carriage weight = 1.1 kg each, Maximum Speed 2 (m/s), Maximum Acceleration = 9.81 (m/s ²)						

Please Note - the numbers in these drawings and tables represent performance parameters for our standard model. We can always customize a model more specifically to your application. Due to the construction nature and roller orientation with our C-Track Roller guides, they should be mounted and used only in an upright position.

Paletti linear C-track roller guides are commonly used in classic linear motion applications with a physical load structure supported by 2 or more linear guides and with the load driven with an actuator / screw system / or cylinder. Our C-track roller guides can be an excellent substitute for traditional hardened and ground rail systems which are often over-featured and over-priced for a given application.

Since our C-track roller guides are an exact dimensional and performance match to our C-track belt actuators, the user can greatly simplify their design and installation when using the two together. Also, our C-track roller guides are especially well suited for rolling door and window applications.

Consider these product advantages with Paletti linear slider guides:

- ◆ Special POM roller carriage construction
 - ◆ Rollers inside the carriage are internally tensioned
 - ◆ Carriage and rail systems do not require lubrication
 - ◆ Single axis through multi-axis configurations
 - ◆ Single piece carriage and rail construction for all guide types, with corrosion resistant components ◆
- Carriages and/or slide rails available in special long (20+ feet) lengths

Since our linear actuators and guides, aluminum framing, and conveyors all use the same 8mm T-Slot, it is very easy for us to configure and/or build an entire system or machine base.

We believe in being accessible, so contact us today to learn more!



Tel. 267-289-0020

E-Mail: sales@palettiusa.com

Web: www.palettiusa.com